

# Optoelectronică, structuri și tehnologii

Curs 5  
2013/2014

# Orar

## ▶ Curs





- marti, 09–12, P7
- 2C  $\Rightarrow$  3C
  - $14 * 2/3 \approx 9.33$
  - $9 \div 10$  C

# Fibra optică

## Capitolul 5


# Recapitulare

# Fibre

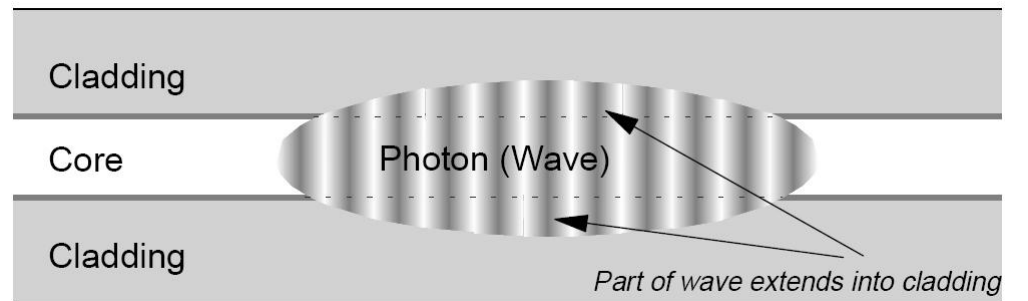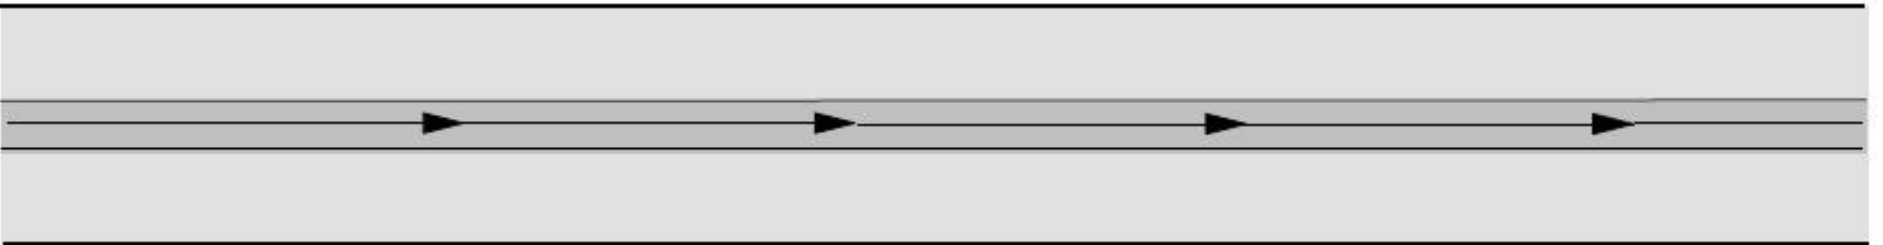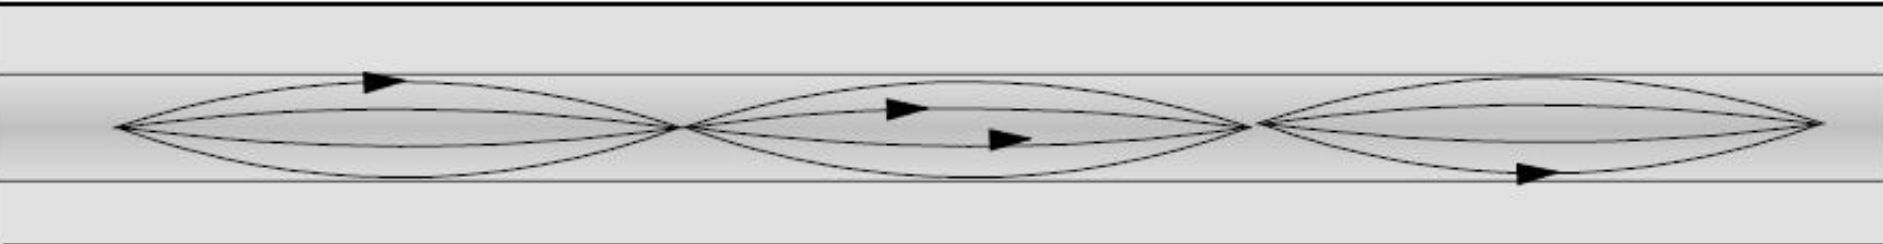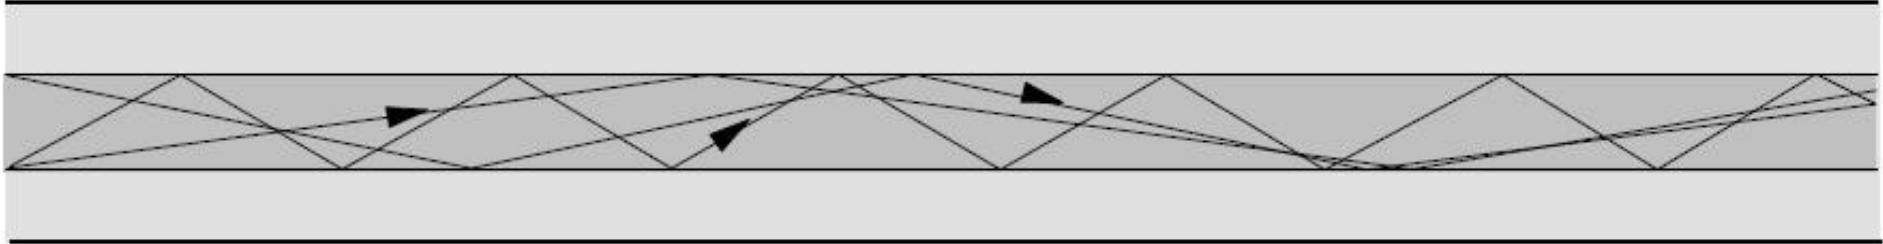


# Dispersia

- ▶ intermodala (modala – depinde de prezenta modurilor)
- ▶ intramodala (cromatica – depinde de lungimea de unda)
  - de material
  - de ghid

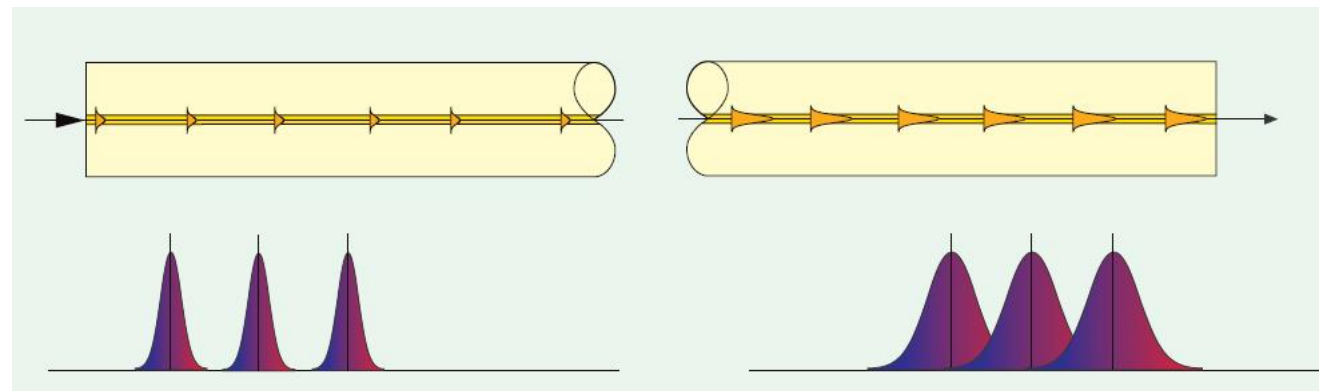


# Dispersia de material

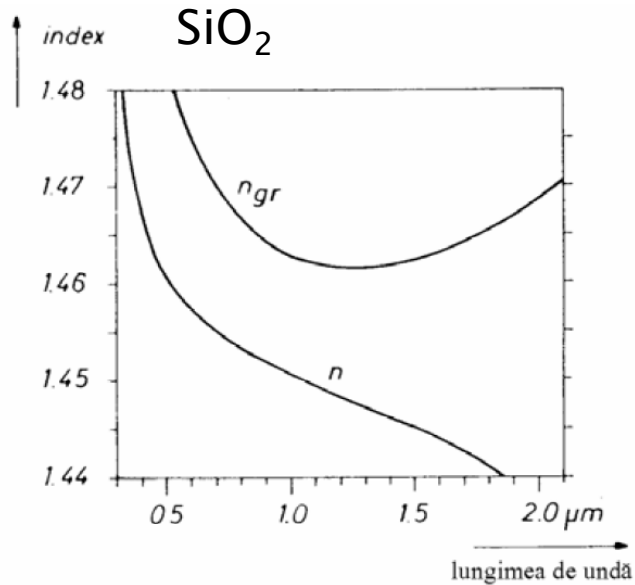


$$n_{gr} = n - \lambda \frac{dn}{d\lambda}$$

$$\Delta\tau_{mat} = \frac{L \cdot \lambda \cdot \Delta\lambda}{c} \cdot \frac{d^2n}{d\lambda^2}$$

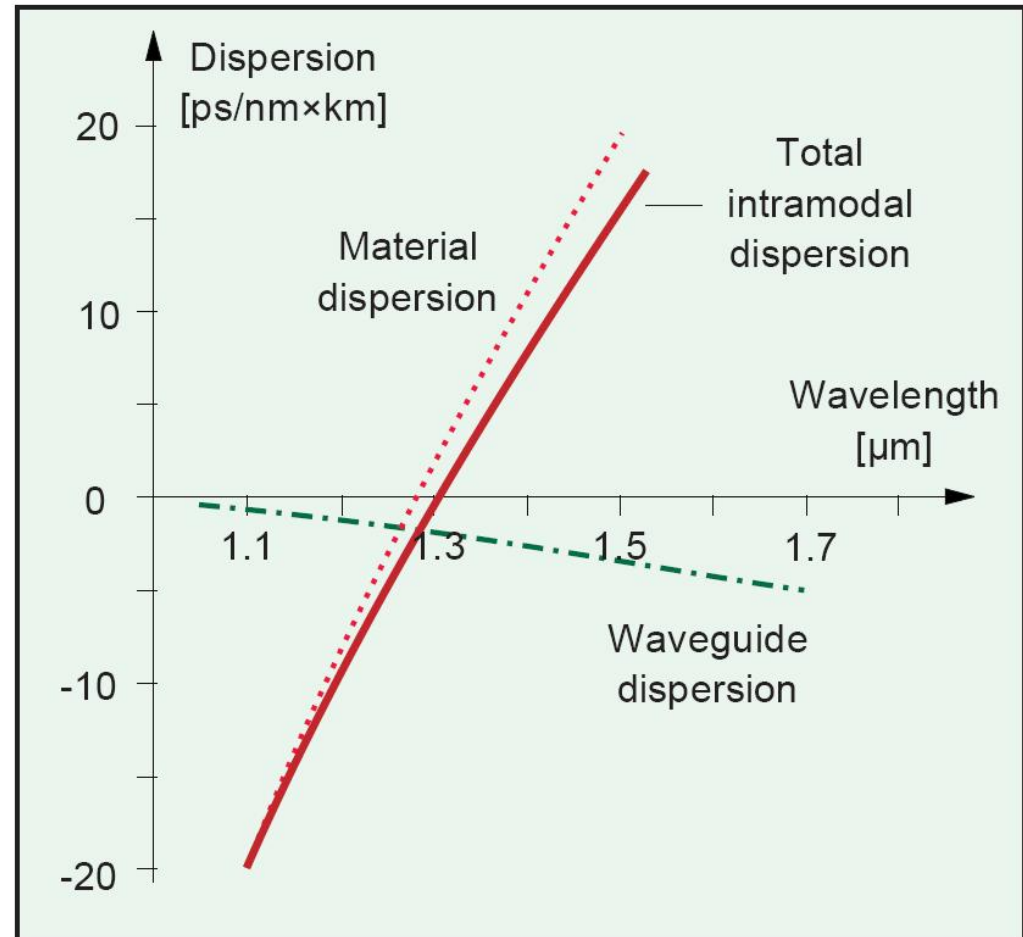



# Dispersia cromatica (gh+mat)

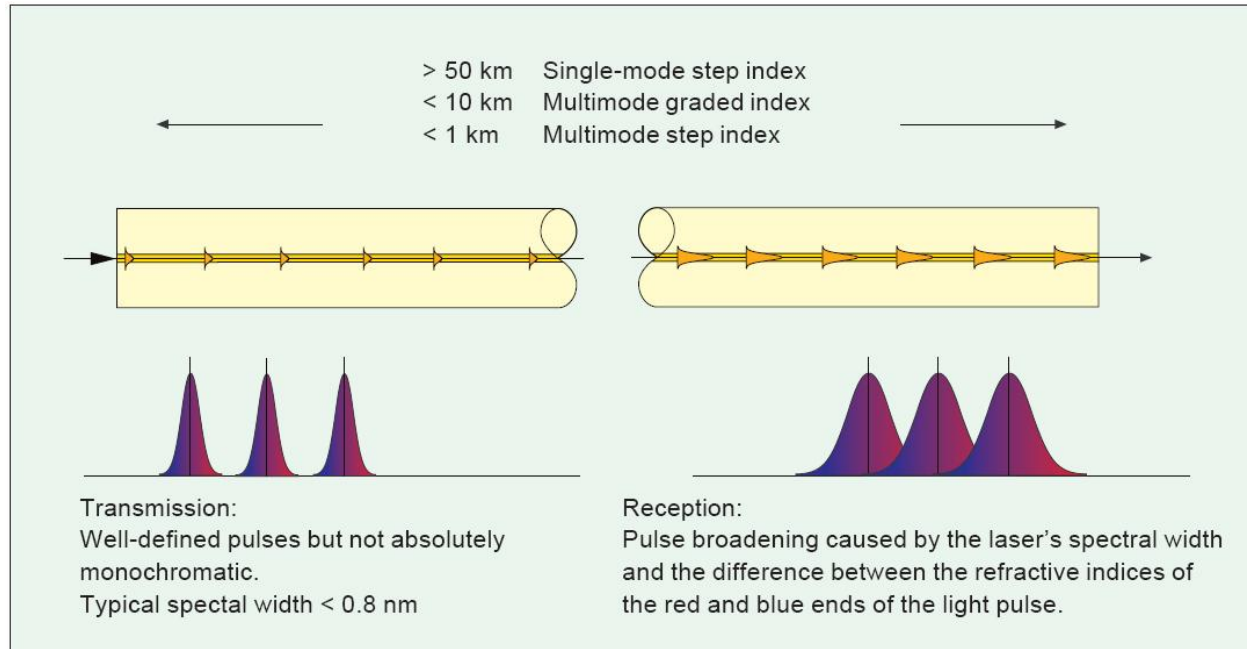

$$\Delta\tau_{cr} = D(\lambda) \cdot \Delta\lambda \cdot L$$

$$D(\lambda) = \frac{S_0}{4} \cdot \left( \lambda - \frac{\lambda_0^4}{\lambda^3} \right)$$

$S_0$  panta dispersiei -  
ps/nm<sup>2</sup>/km


$$D(\lambda_0) = 0$$

- ▶  $D(\lambda) \approx 100 + 0.4 (850 - \lambda)$  [ps/nm/km]  
pentru  $800 < \lambda < 900$  nm
- ▶  $D(\lambda) \leq 3,5$  ps/nm/km  
pentru  $1285 < \lambda < 1330$  nm
- ▶  $D(\lambda) \leq 17$  ps/nm/km  
pentru  $1525 < \lambda < 1575$  nm



$$D(\lambda) = \frac{S_0}{4} \cdot \left( \lambda - \frac{\lambda_0^4}{\lambda^3} \right)$$



# Calitatea spectrală a emițătorilor optici

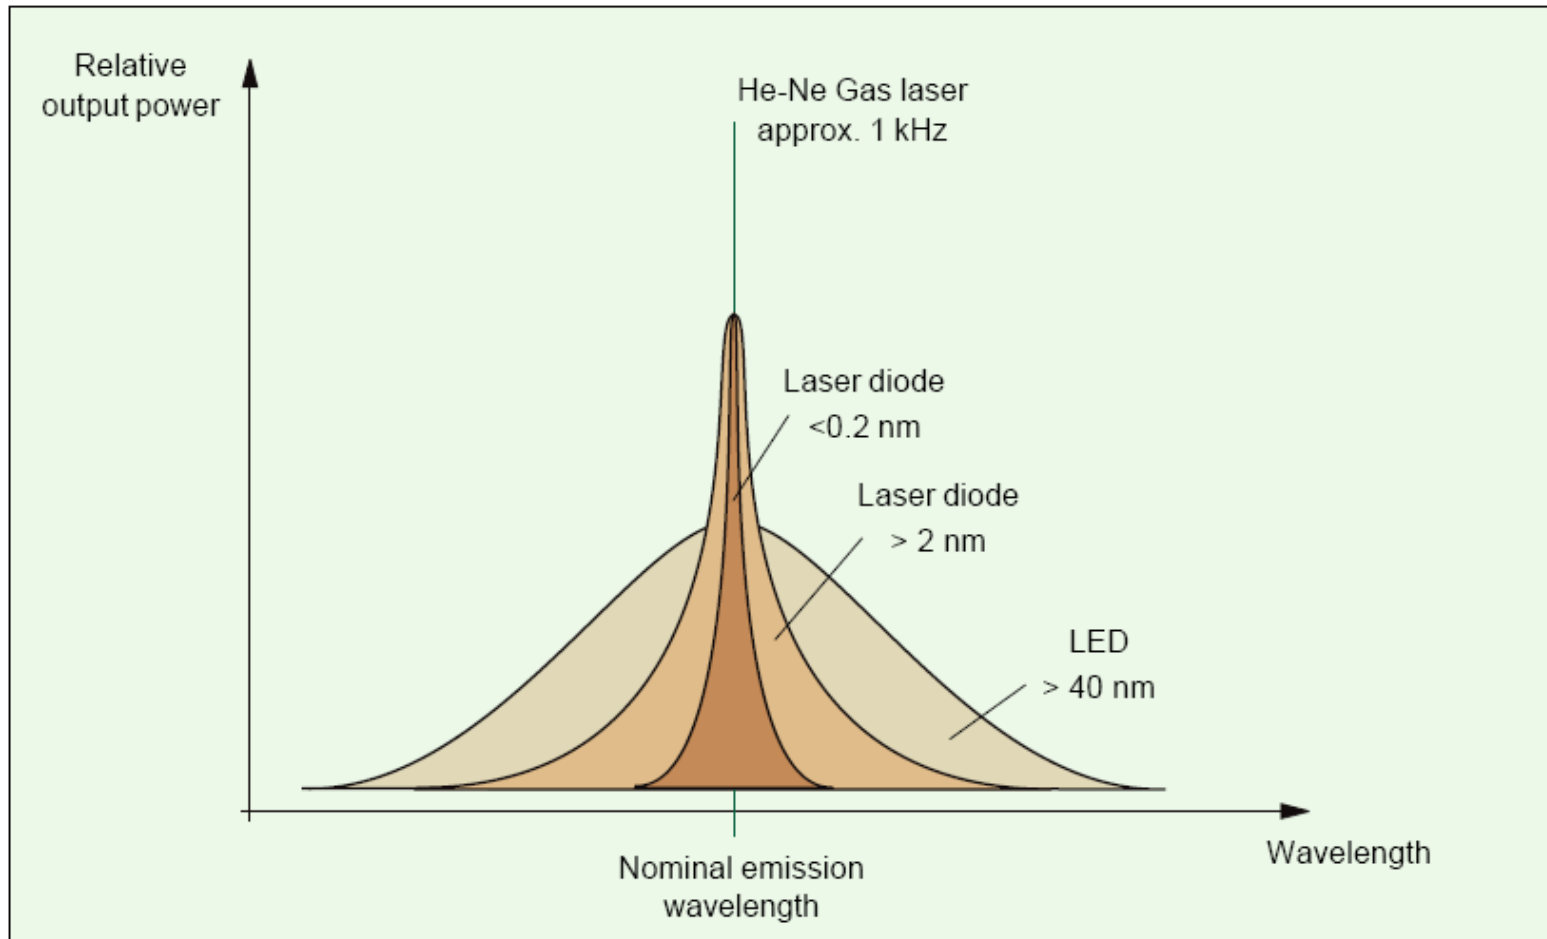

# He-Ne Laser

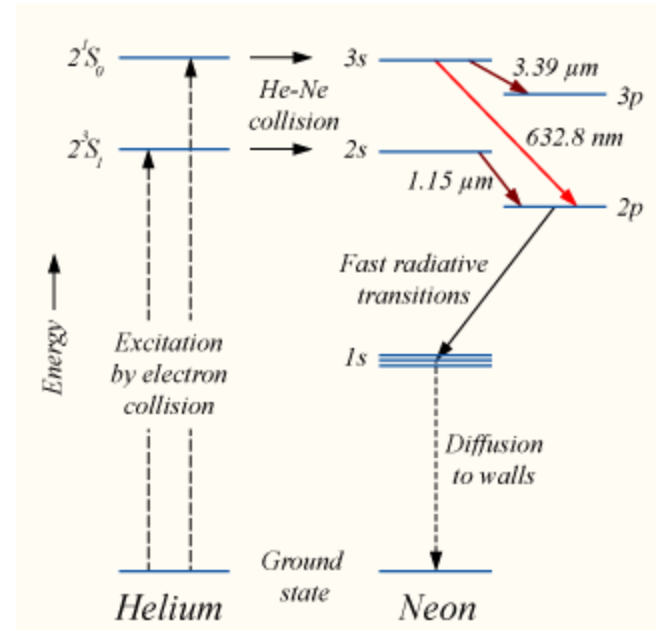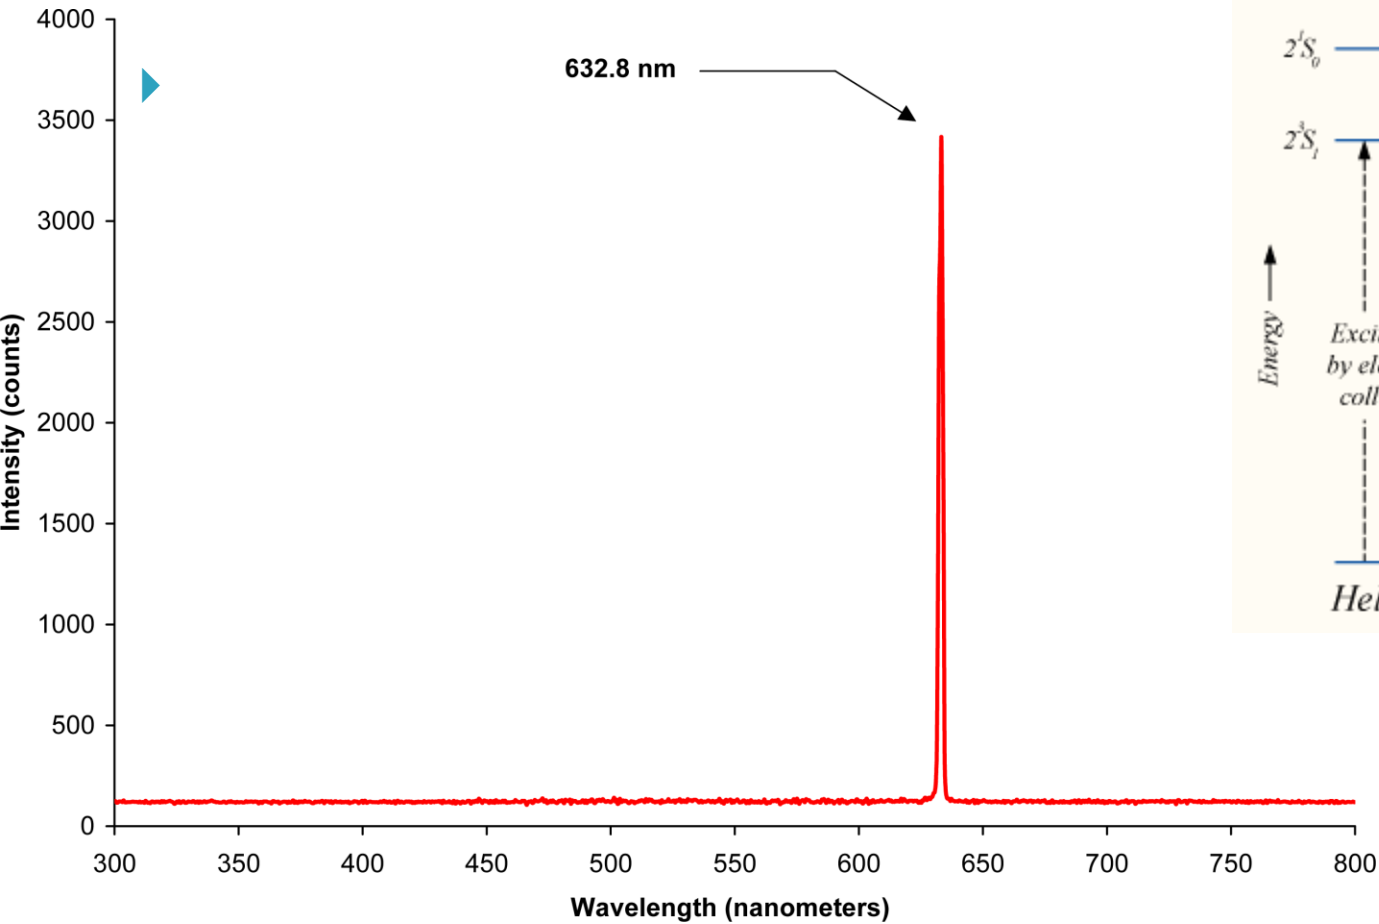

$$\Delta\lambda = 0.002 \text{ nm}$$

# Banda

- ▶ Dispersia totala

$$\Delta\tau_{tot} = \sqrt{\Delta\tau_{cr}^2 + \Delta\tau_{mod}^2}$$

- ▶ Banda

$$B_{opt} = \frac{0.44}{\Delta\tau_{tot} [ns]} [GHz]$$

- ▶ Banda optica la 3 dB corespunde unei benzi electrice la 6 dB


- $P_{opt} \sim I$ ;  $P_{el} \sim I^2$

$$B_{opt} = \sqrt{2}B_{el}$$



- ▶ Viteza legaturii

$$V [Gb/s] \cong 2 \cdot B_{el} [GHz]$$

# Non-zero Dispersion shifted fibers



FWM

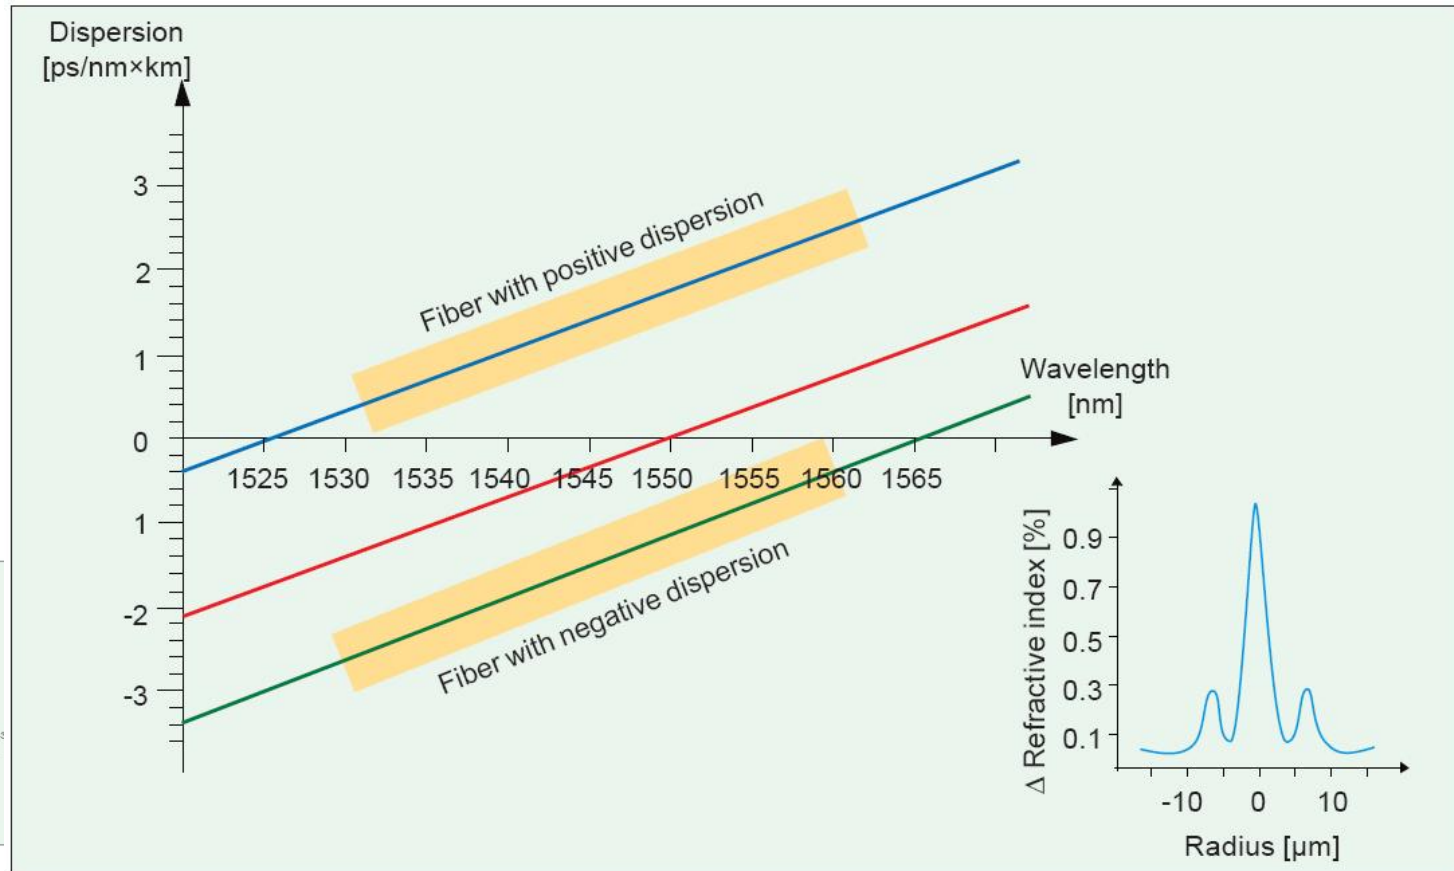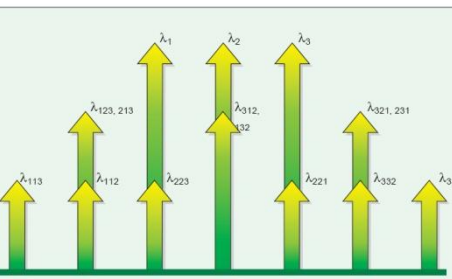


**Continuare**



# Dispersie exemplu - 1


## ▶ transmisii cu viteze diferite

$$\Delta\tau_{cr} = D(\lambda) \cdot \Delta\lambda \cdot L$$

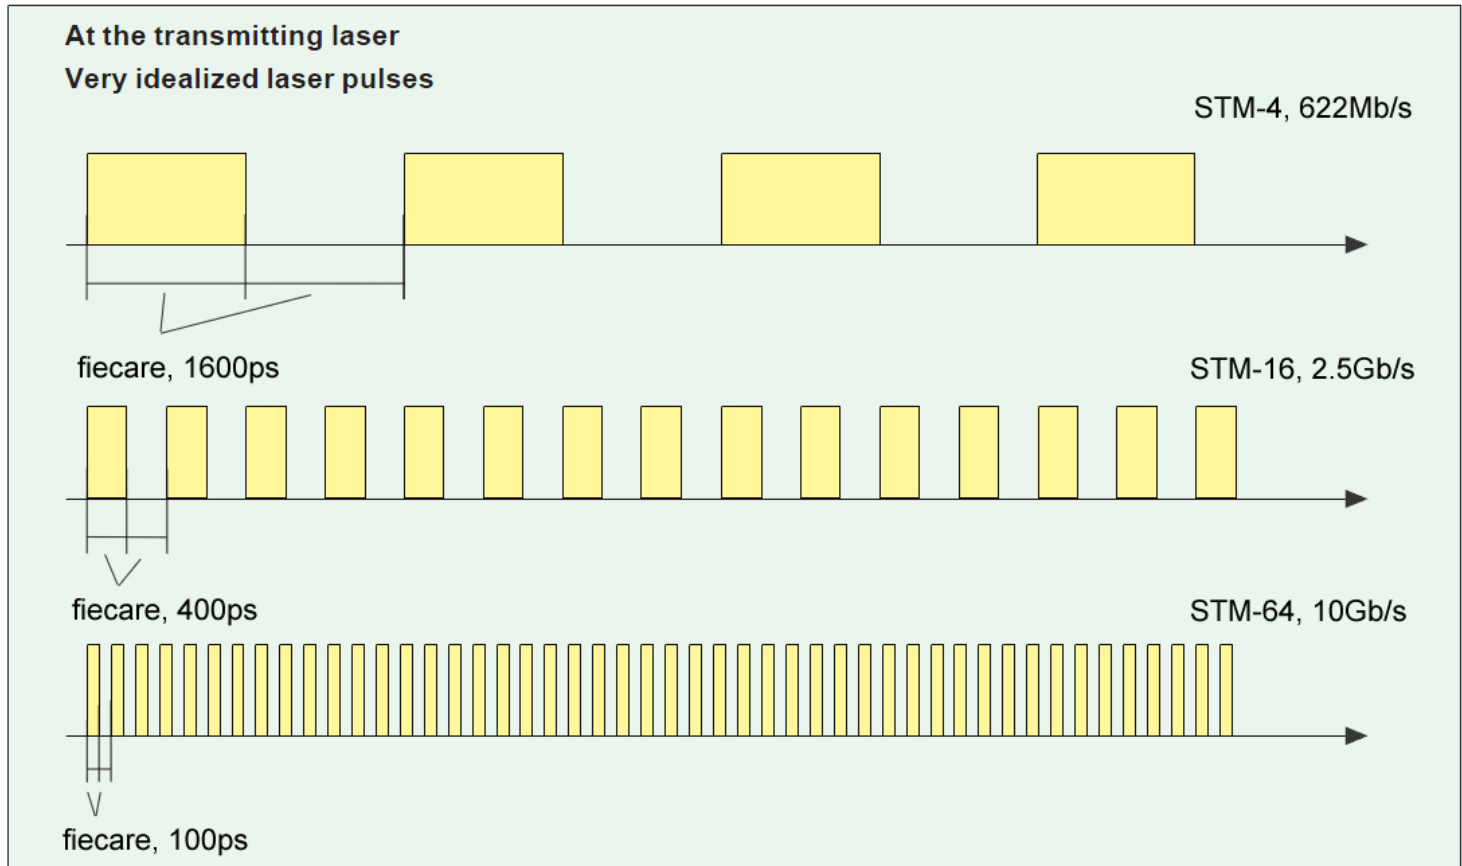

# Dispersie exemplu - 2

- ▶ 1550nm
- ▶ Efectul sursei
  - fibra monomod cu dispersia 16ps/nm/km@1550
  - latimea spectrala a sursei  $\Delta\lambda=1$  nm
  - 50km

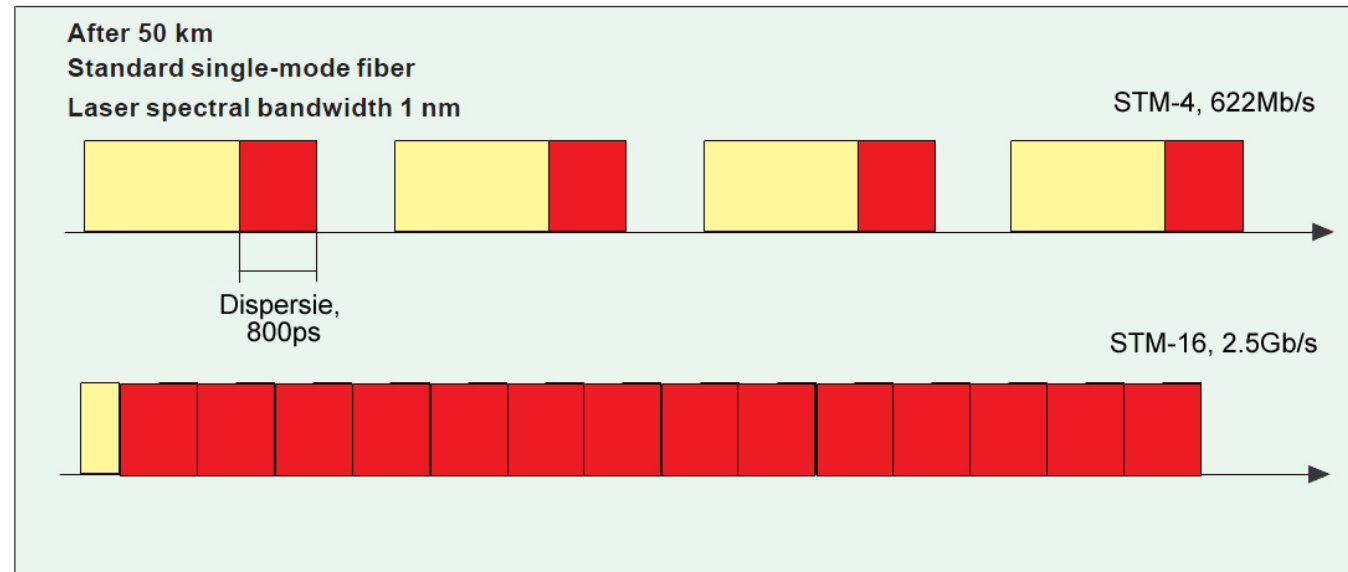

$$\Delta\tau_{cr} = D(\lambda) \cdot \Delta\lambda \cdot L$$

$$\Delta\tau_{cr} = 16 \cdot 1 \cdot 50 \text{ ps} = 800 \text{ ps}$$

$$100 < 400 < 800 < 1600$$




# Dispersie exemplu – 3

- ▶ 1550nm
- ▶ Efectul sursei
  - fibra monomod cu dispersia 16ps/nm/km@1550
  - latimea spectrala a sursei  $\Delta\lambda=0.1$  nm
  - 50km

$$\Delta\tau_{cr} = D(\lambda) \cdot \Delta\lambda \cdot L$$

$$\Delta\tau_{cr} = 16 \cdot 0.1 \cdot 50 \text{ ps} = 80 \text{ ps}$$

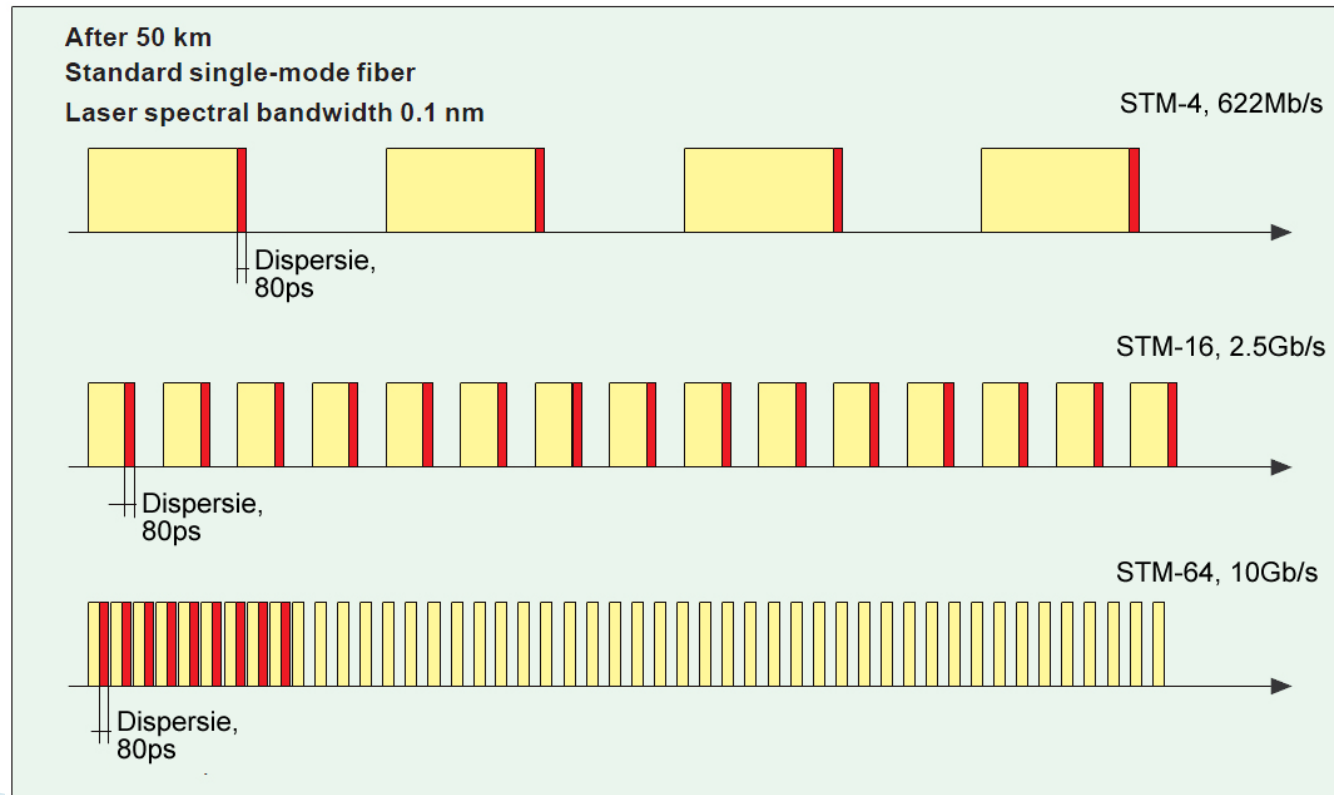

$$100 \approx 80 < 400 < 1600$$


# Dispersie exemplu - 4

## ▶ Efectul fibrei

- fibra cu dispersie deplasata: 4ps/nm/km@1550
- latimea spectrala a sursei  $\Delta\lambda=0.1$  nm
- 50km

$$\Delta\tau_{cr} = D(\lambda) \cdot \Delta\lambda \cdot L$$

$$\Delta\tau_{cr} = 4 \cdot 0.1 \cdot 50 \text{ ps} = 20 \text{ ps}$$

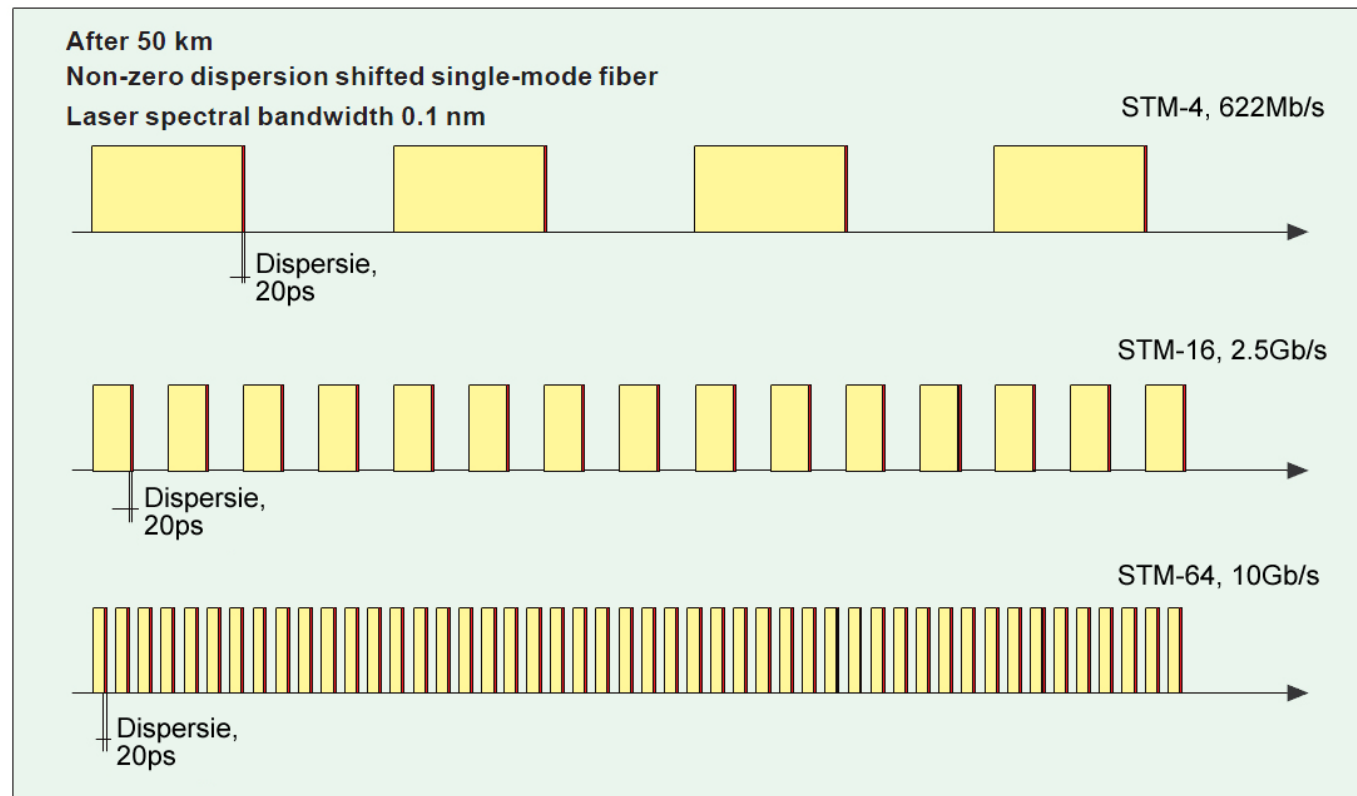

20 < 100 < 400 < 1600


# Dispersie exemplu - 5

## ▶ Efectul fibrei

- fibra cu dispersie deplasata: 4ps/nm/km@1550
- latimea spectrala a sursei  $\Delta\lambda=0.1$  nm
- 150km

$$\Delta\tau_{cr} = D(\lambda) \cdot \Delta\lambda \cdot L$$

$$\Delta\tau_{cr} = 4 \cdot 0.1 \cdot 150 \text{ ps} = 60 \text{ ps}$$

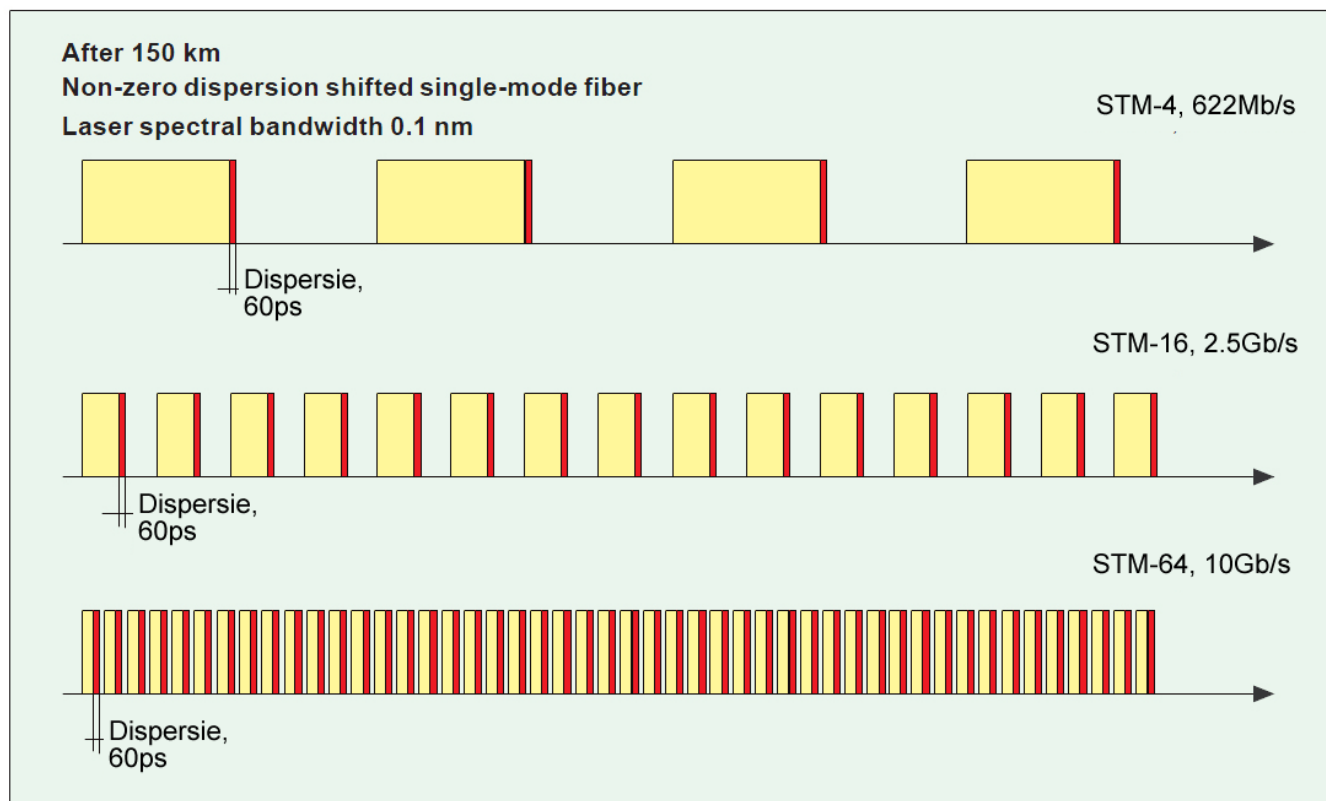


60 < 100 < 400 < 1600

# ATENUAREA

- ▶ Macrocurburi
- ▶ Microcurburi
- ▶ Imprastiere
- ▶ Absorbție

$$\text{Pierderi} = \frac{P_{out}}{P_{in}}$$


$$\text{Pierderi [dB]} = [-] 10 \cdot \log_{10} \left( \frac{P_{out}}{P_{in}} \right)$$

$$\text{Pierderi [dB]} = [-] (P_{out} [\text{dBm}] - P_{in} [\text{dBm}])$$



$$\text{Atenuare [dB/km]} = \frac{\text{Pierderi [dB]}}{\text{lungime [km]}}$$

# Fibra optică – Tehnologie

Capitolul 6


# OTDR

- ▶ Optical time-domain reflectometer
- ▶ Localizarea defectelor

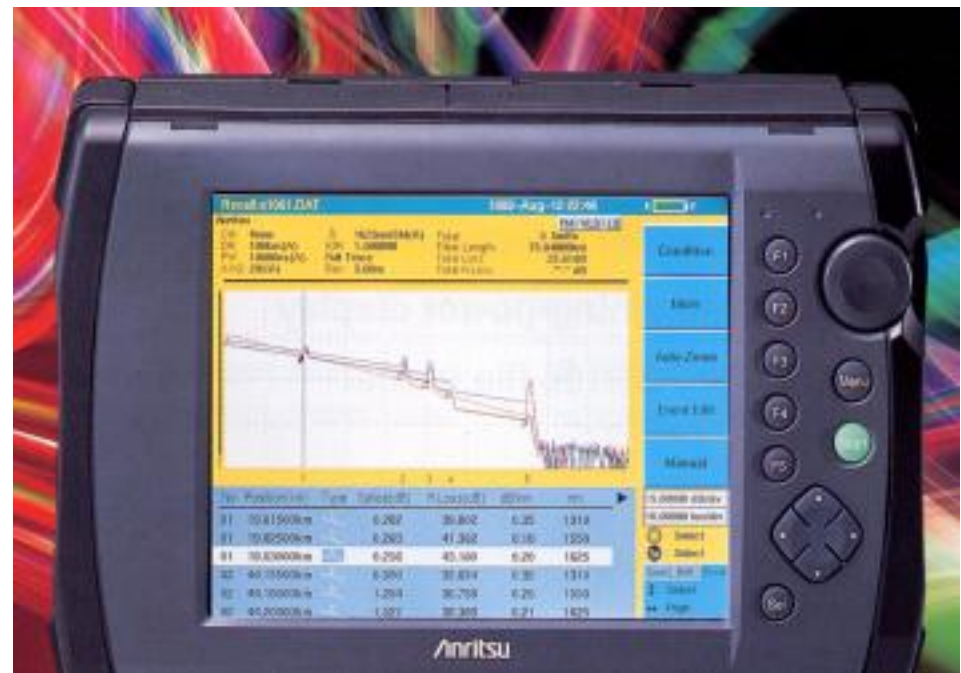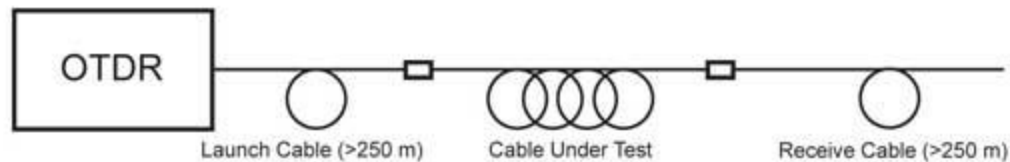


# OTDR

- ▶ Optical time-domain reflectometer
- ▶ Localizarea defectelor

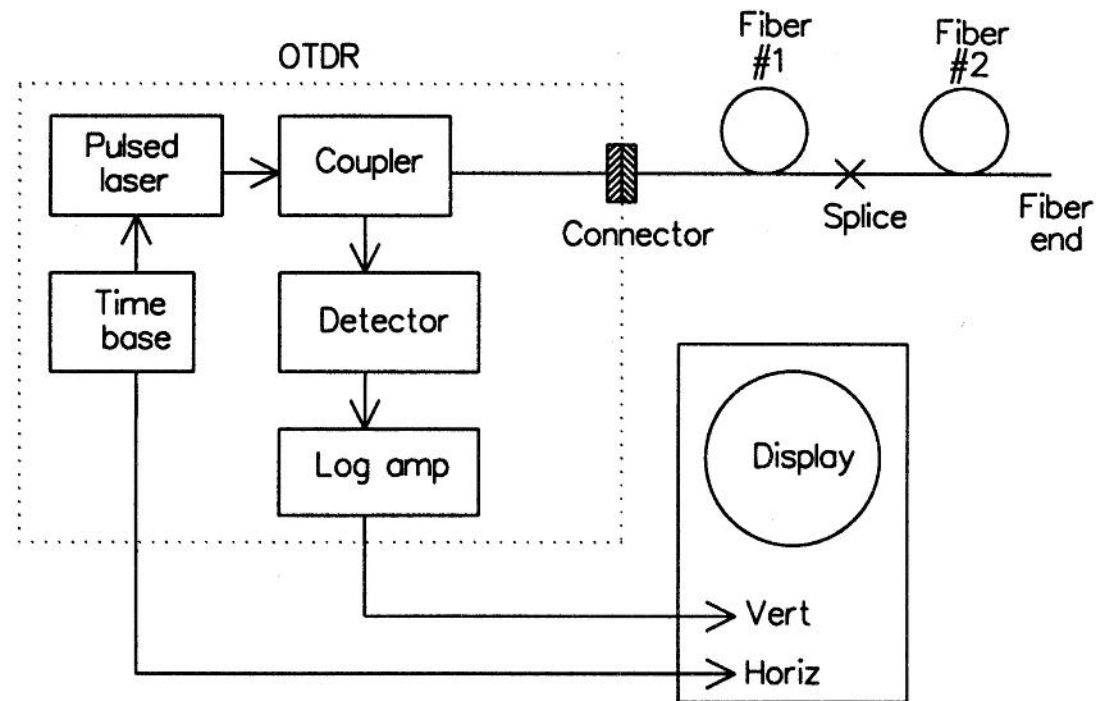



# Rezultat grafic al OTDR

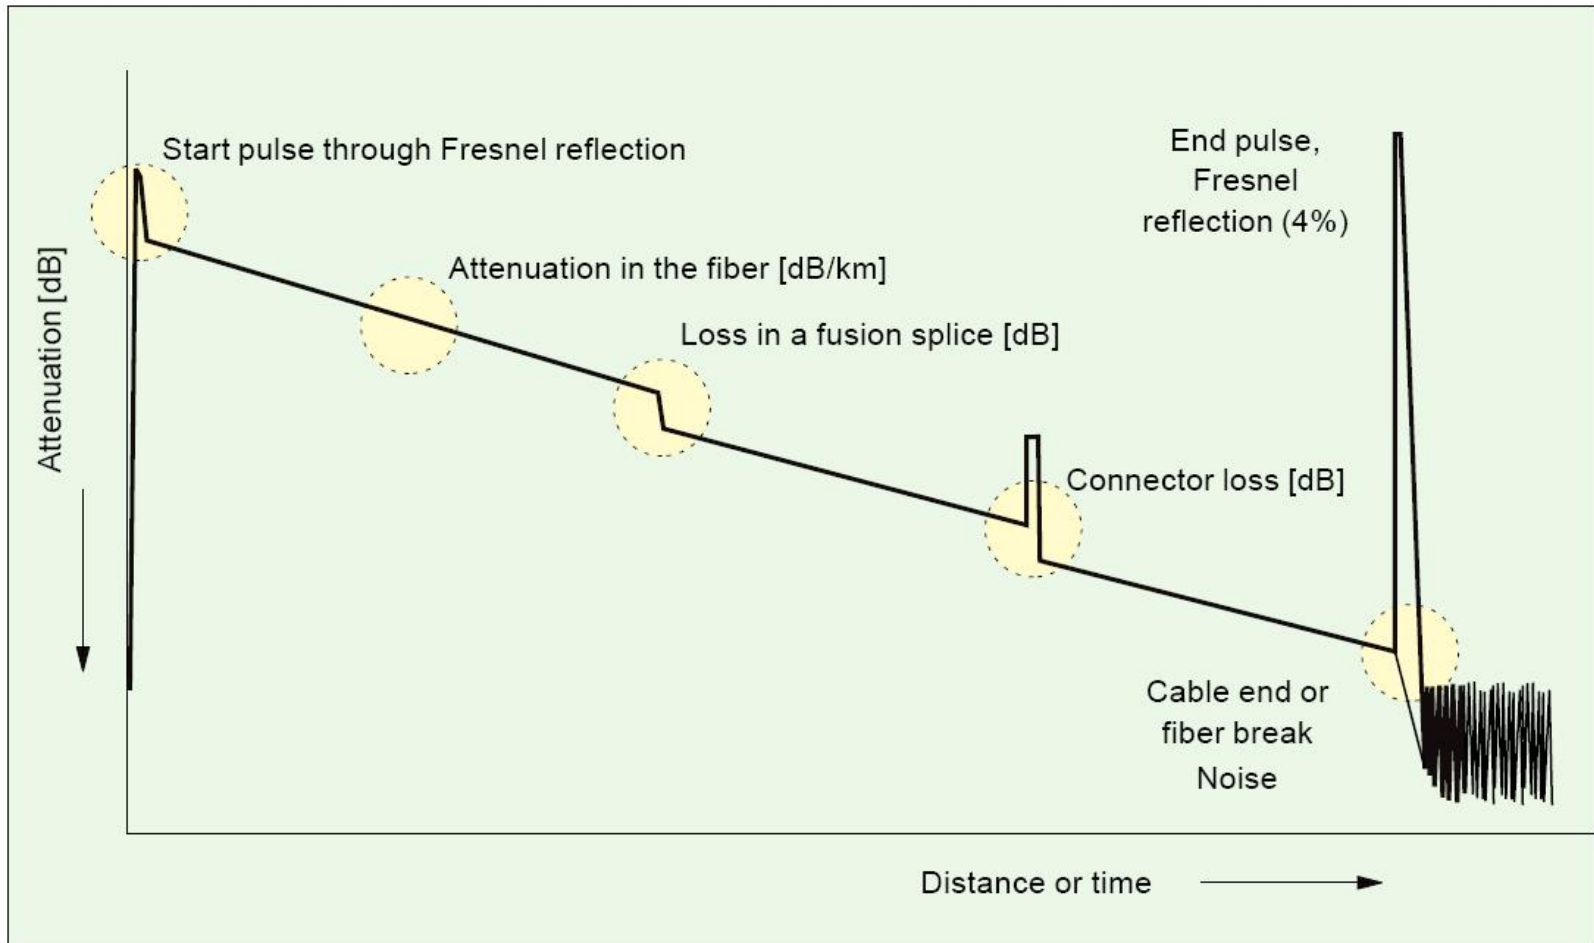

# Efecte vizibile OTDR

reflections show OTDR pulse width and resolution


slope of trace shows fiber attenuation coefficient

connectors show both loss and reflections


splice loss      splices are usually not reflective

$$Splice\ loss = \frac{Splice\ loss_{A \rightarrow B} + Splice\ loss_{B \rightarrow A}}{2}$$

a. same fiber spliced

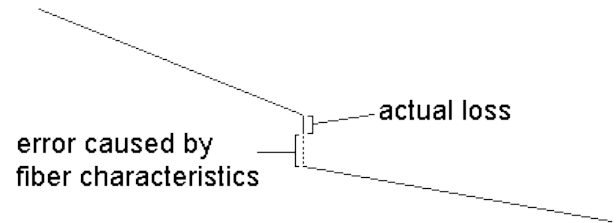

b. high loss fiber spliced to low loss fiber

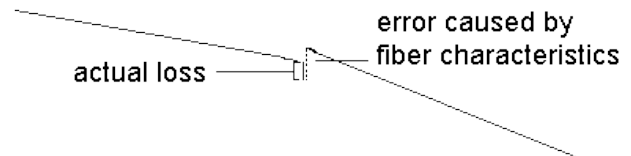


c. low loss fiber spliced to high loss fiber can cause an apparent gain at a splice

# Stabilized light source



## Optical power meter

- ▶ Masurarea puterii si atenuarii

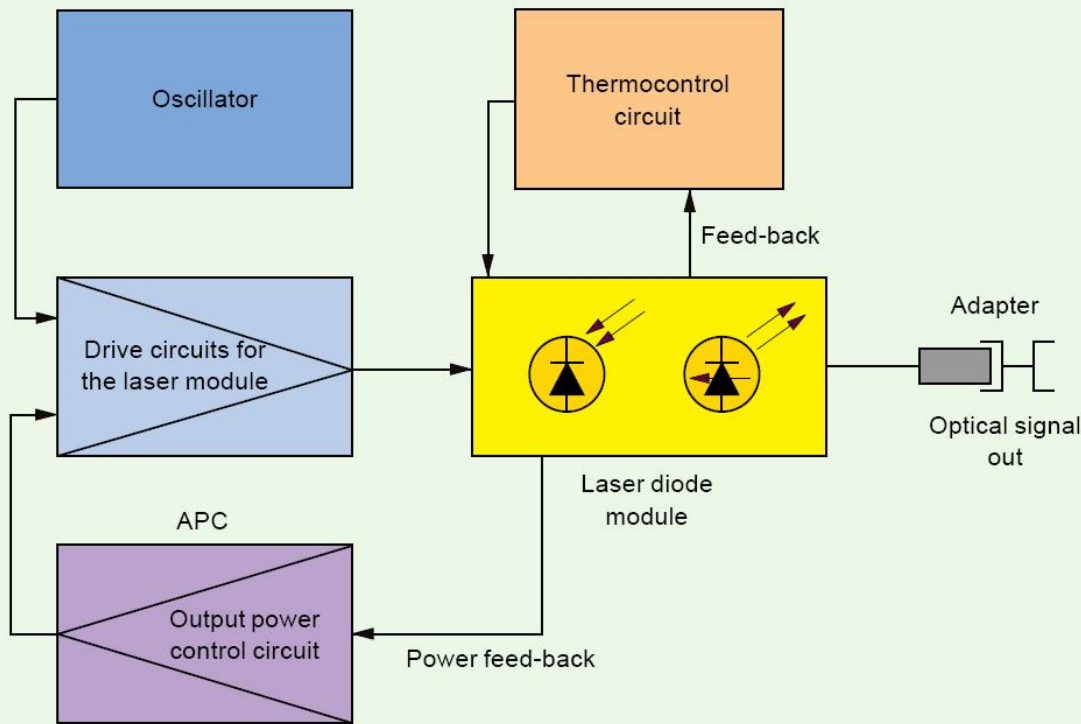

# Taiere – Cleaving

- ▶ Tehnici necesare pentru a asigura o taiere perpendiculara pe axa fibrei

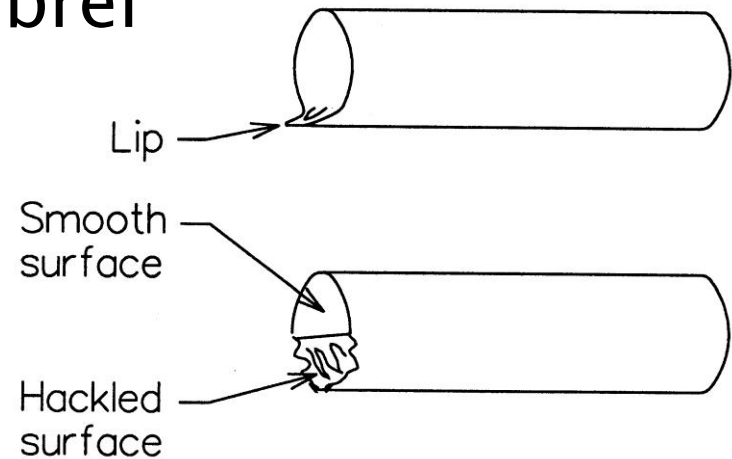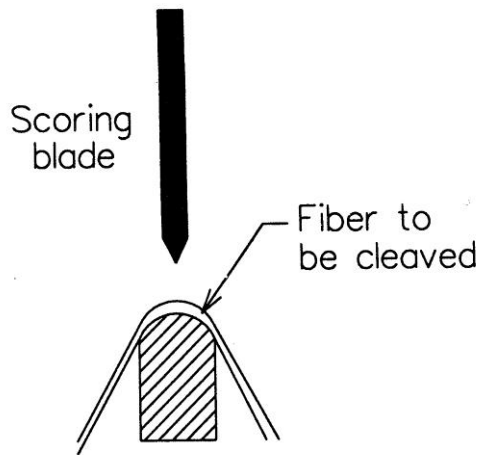




# Lipire prin fuziune






# Splice prin fuziune

Fibers Stripped of Coating, Cleaned, and Cleaved, are Brought Together During the Fusion Arc

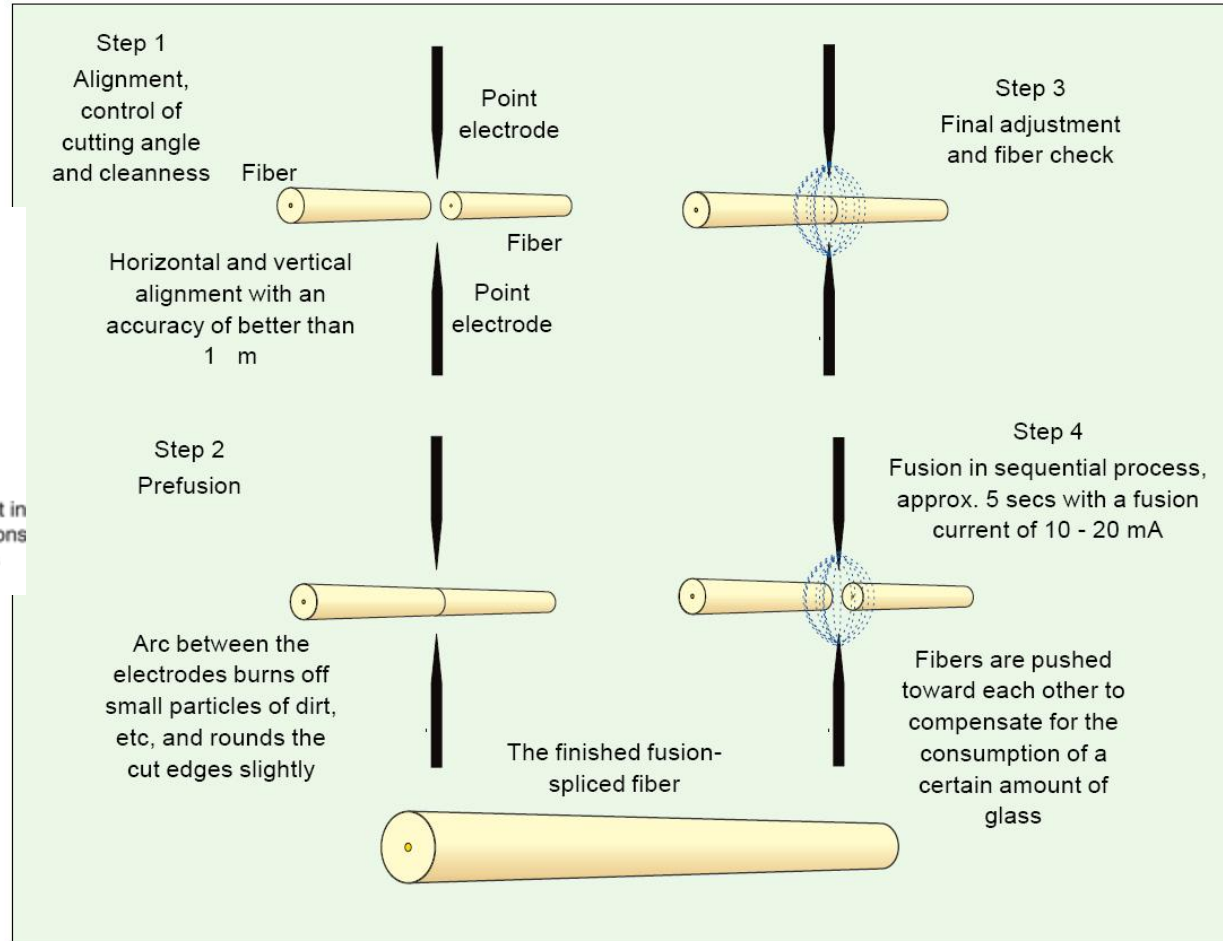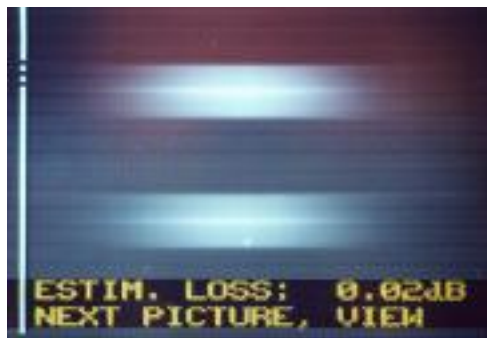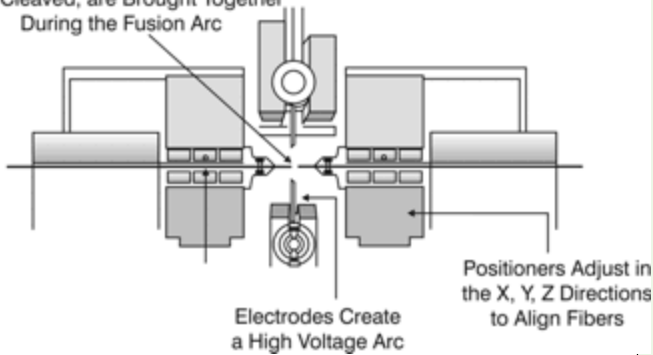


# Splice prin fuziune

Causes of faults in fiber fusion


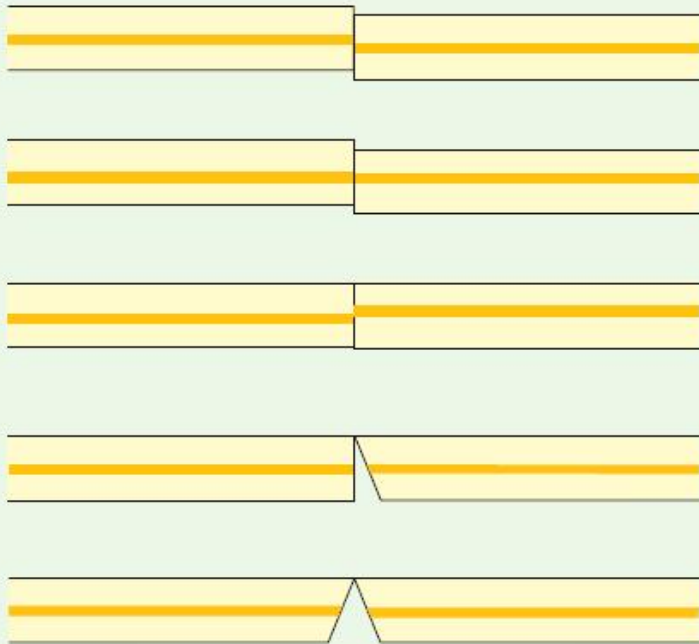


Appearance after fusion

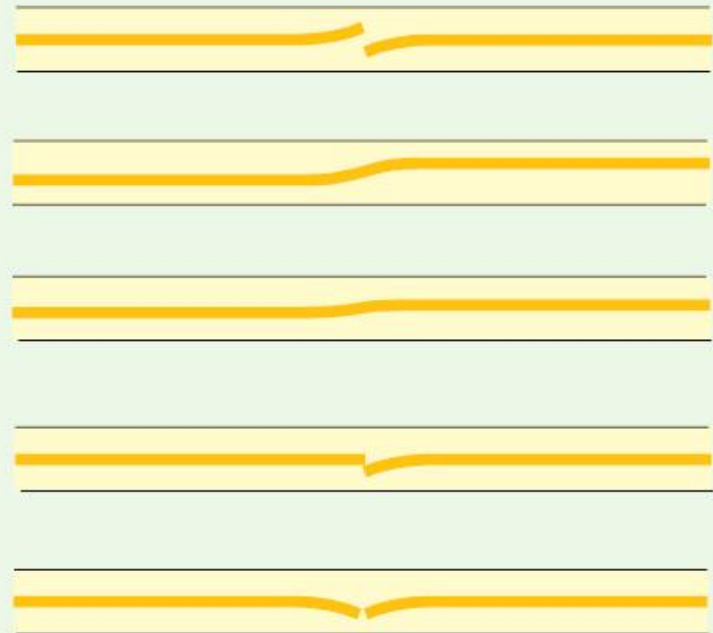






# Splice mechanic – bloc V

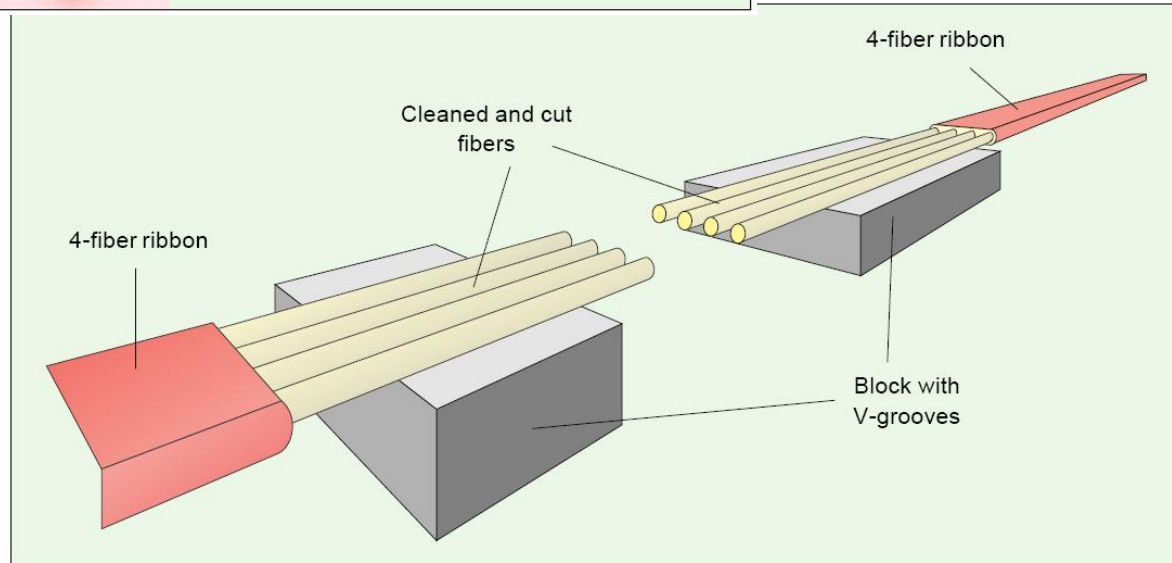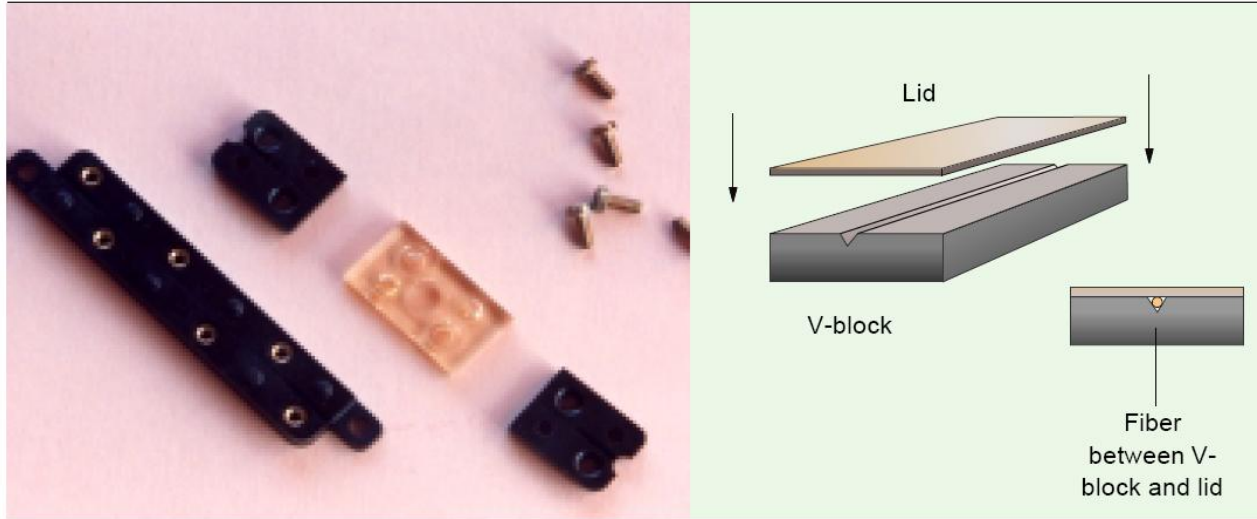

# Splice mechanic - bloc V

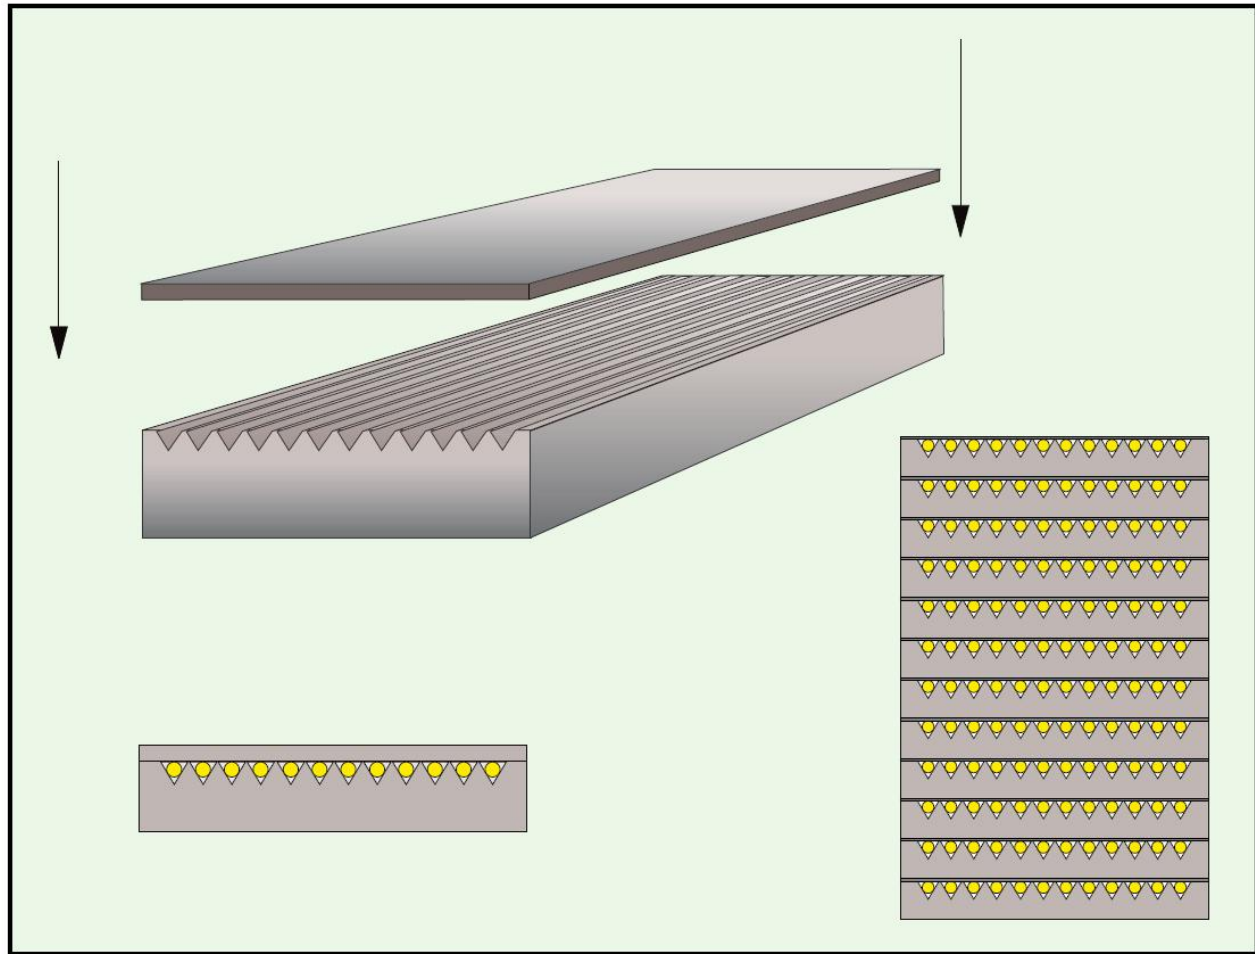


# Splice mechanic

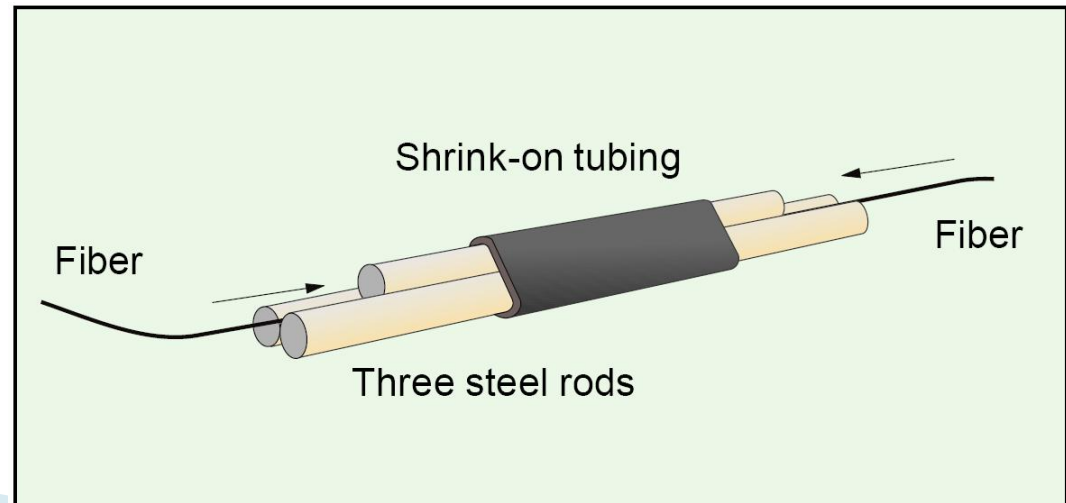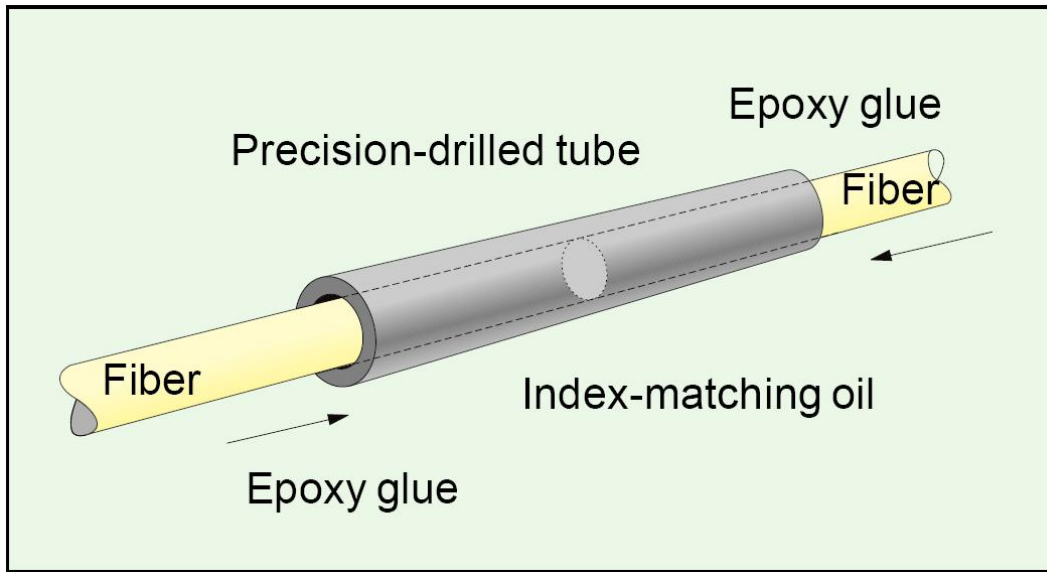


# Probleme Fibre/Conectori


Offset




Angular Misalignment




Separation




Core Eccentricity





Core Ellipticity





Reflections & Interference

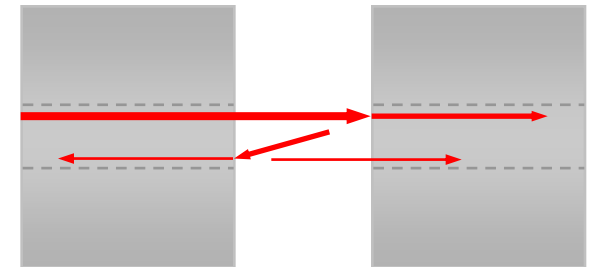

# Cabluri

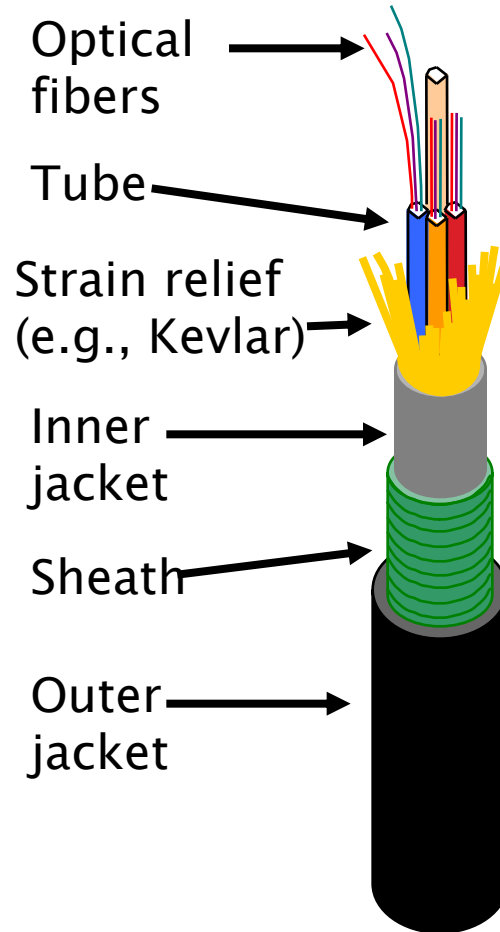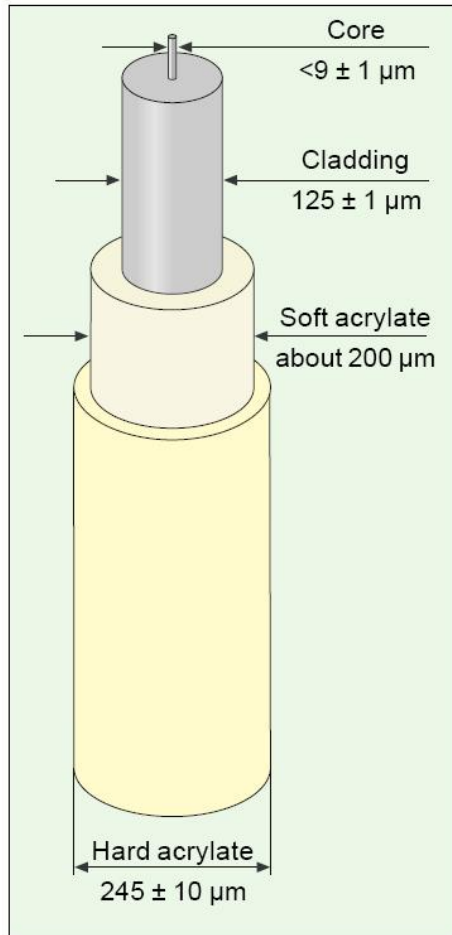


# Cabluri

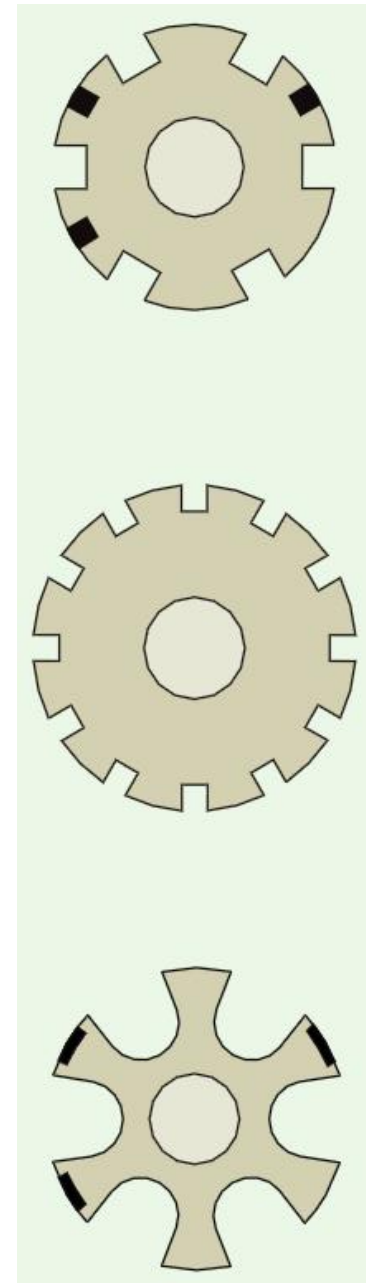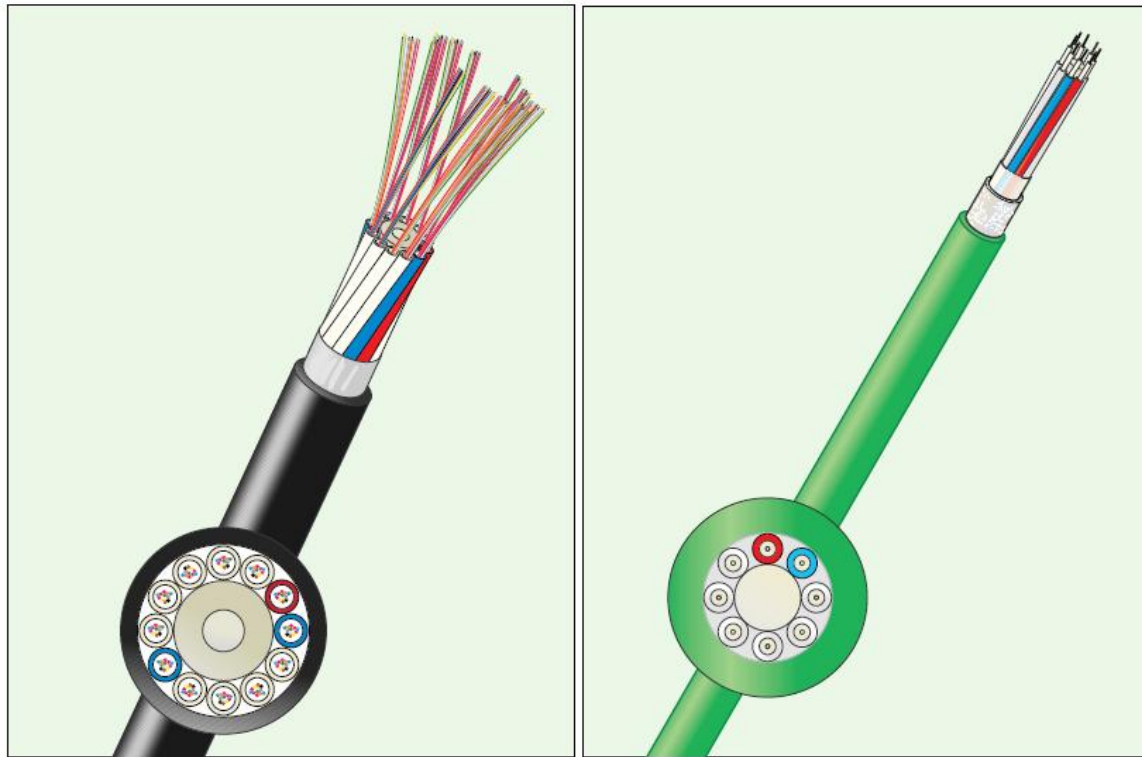




# Cabluri


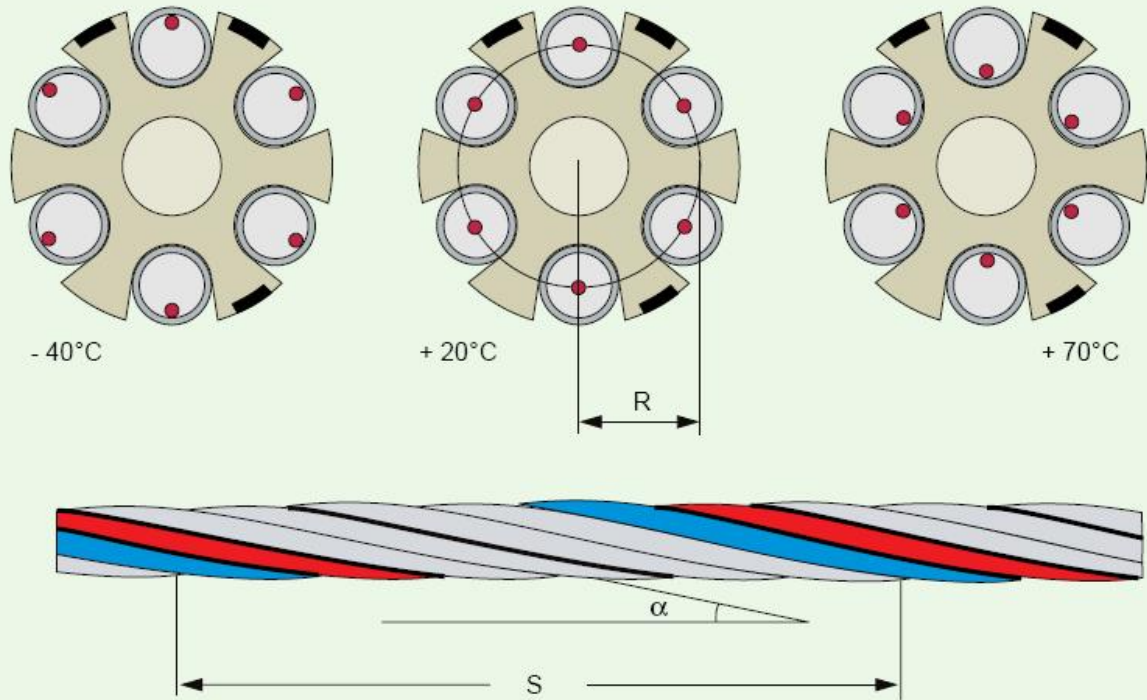


$$L = S \sqrt{1 + \left( \frac{2\pi R}{S} \right)^2}$$

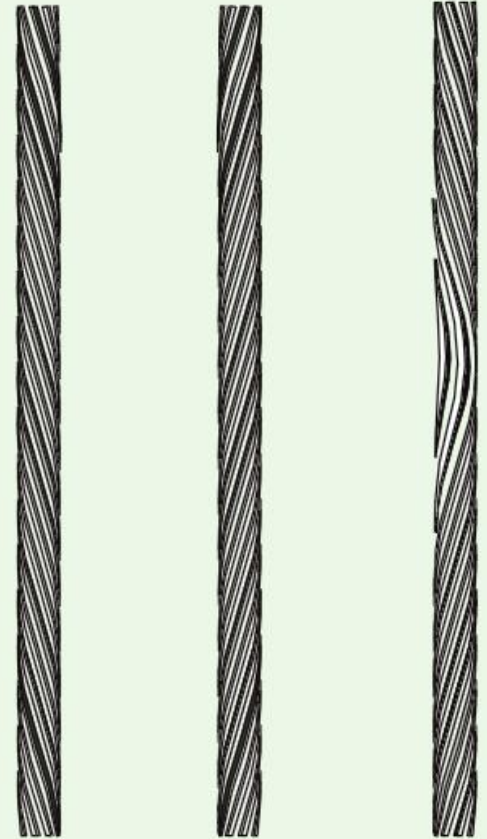




# Cabluri

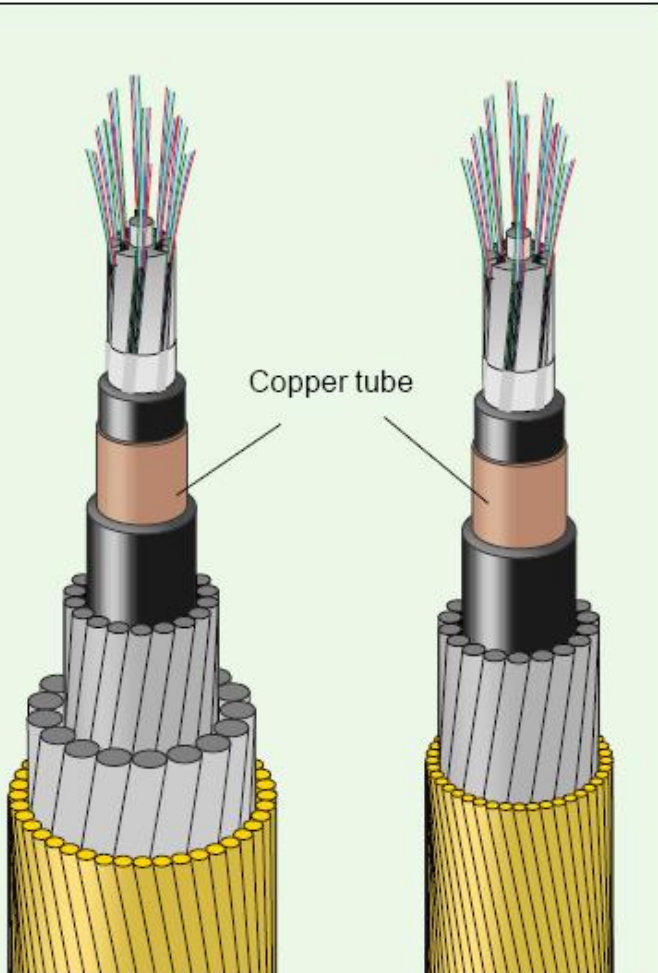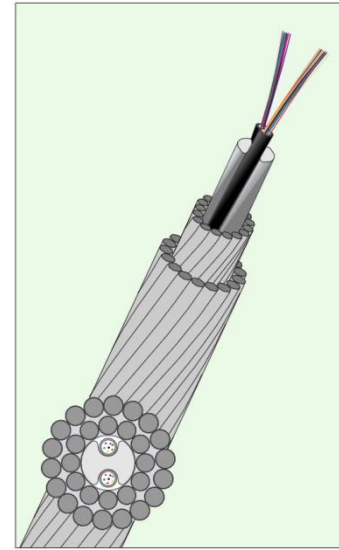

Primary coated fiber




12-fiber ribbon



12 × 12-fiber ribbons  
= 144 fibers



"Lose tube"

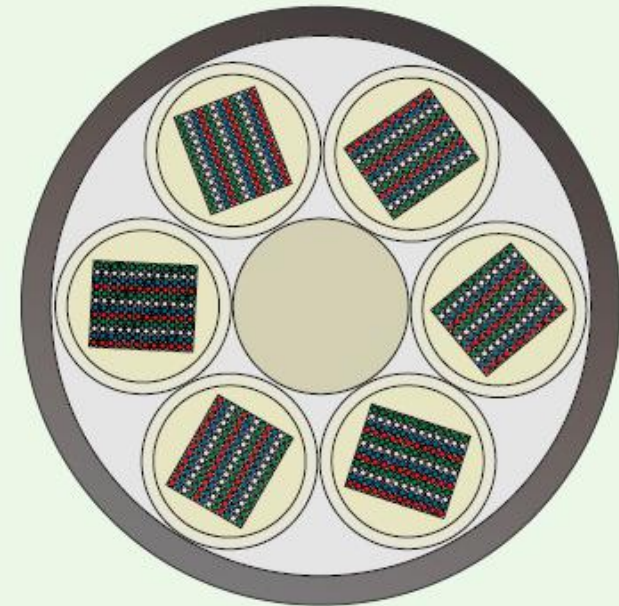


Finished cable with central strength member and with six tubes with each tube containing 144 fibers

# Conettori





# Conettori

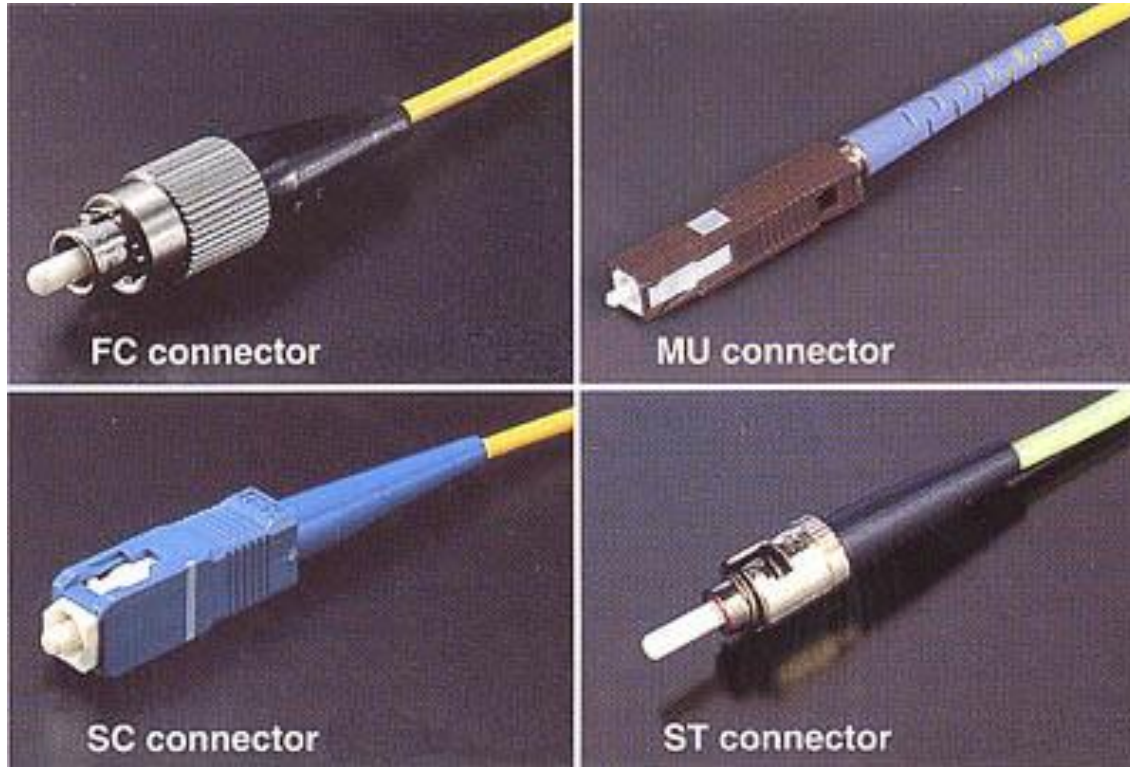

ST

All fiber-optic connectors use ferrules to hold the ends of the fiber and keep them properly aligned.




SMA Type 906

The ST connector uses a half-twist bayonet type of lock, while SMA and FC use threaded connections.



FC

The SC uses a push-pull connector similar to common audio and video plugs and sockets.



SC

The MIC is the standard FDDI connector.



MIC

The Fiber Jack connector attaches two fibers in a snap lock connector similar in size and ease of use as an RJ-45 connector.



Fiber Jack






MT-RJ

MT-RJ is a popular connector for two fibers in a very small form factor.


# Conettori

- ▶ Verificati <http://rf-opto.etc.tuiasi.ro>

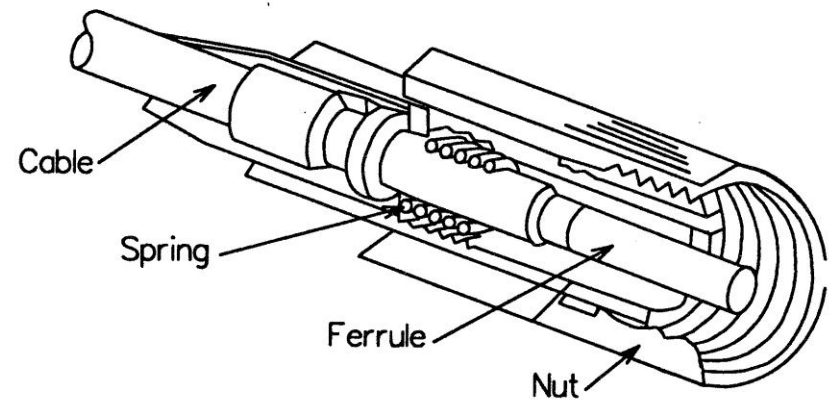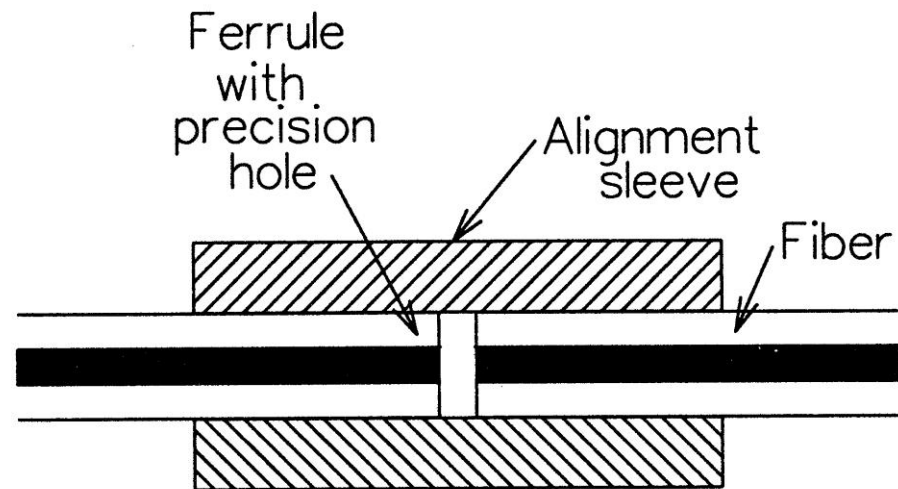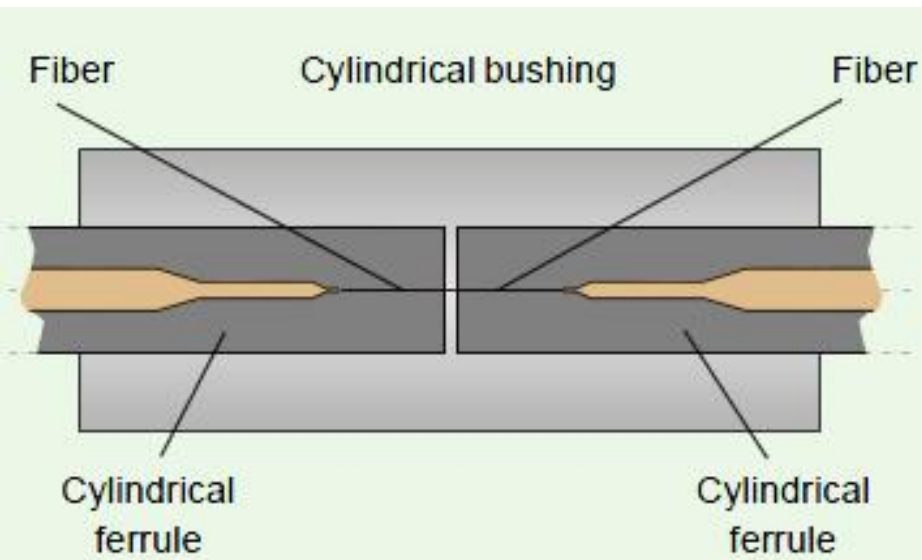


# Conettori



- ▶ Ferula semisferica
  - 20mm
  - 60mm

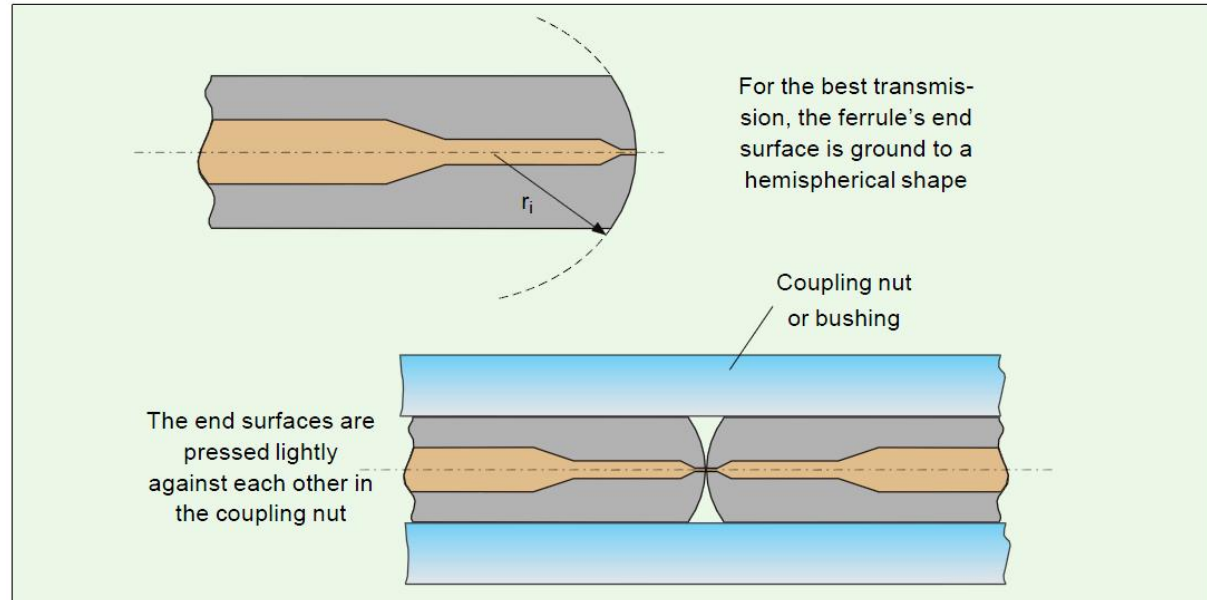

- ▶ Conettori multifibra

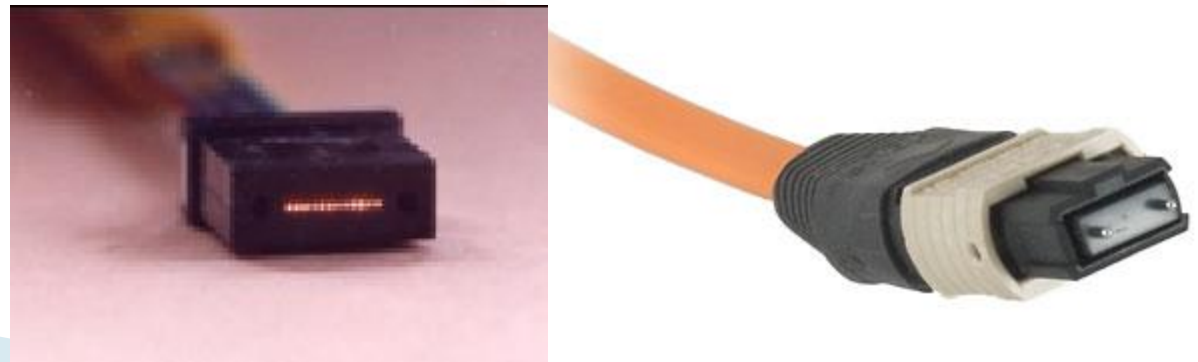


# Expanded beam connector

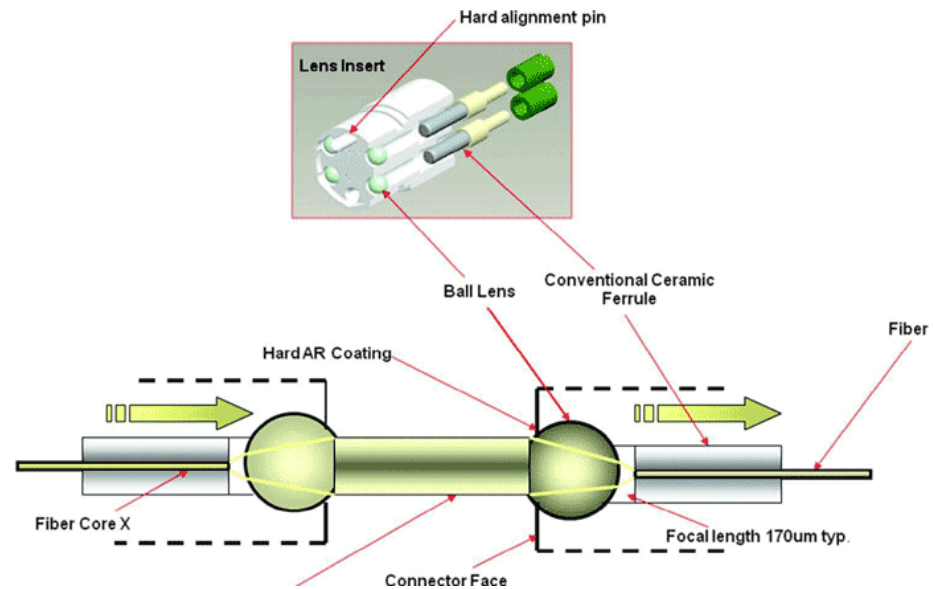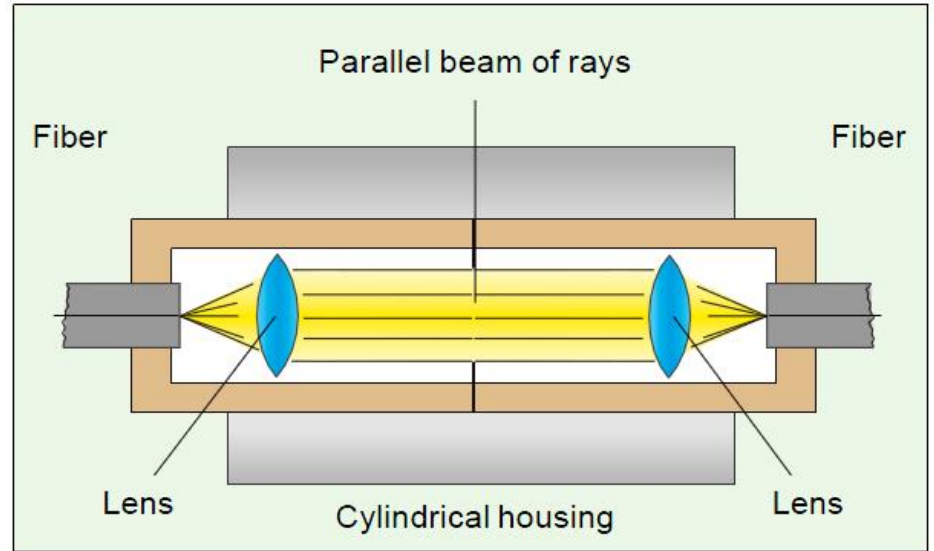



# FTTH


- ▶ FTTN: Fiber to the node, neighborhood
- ▶ FTTC: Fiber to the curb
- ▶ FTTB: Fiber to the building
- ▶ FTTH: Fiber to the home

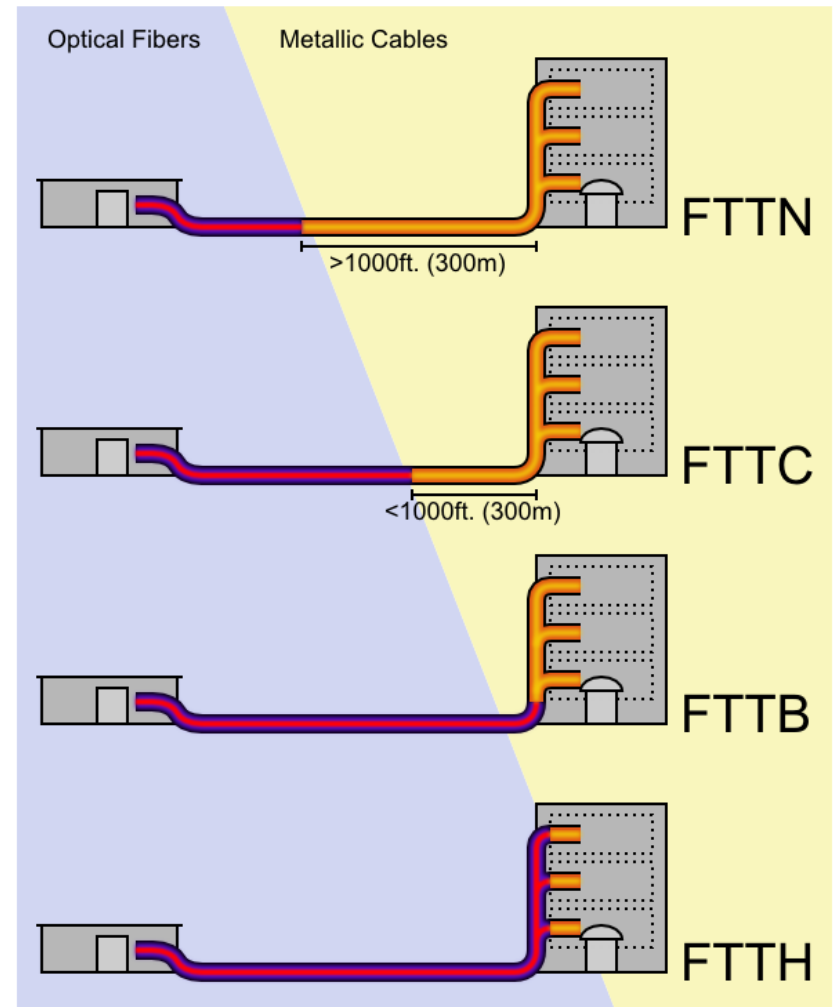



# FDDI

- ▶ Fiber Distributed Data Interface

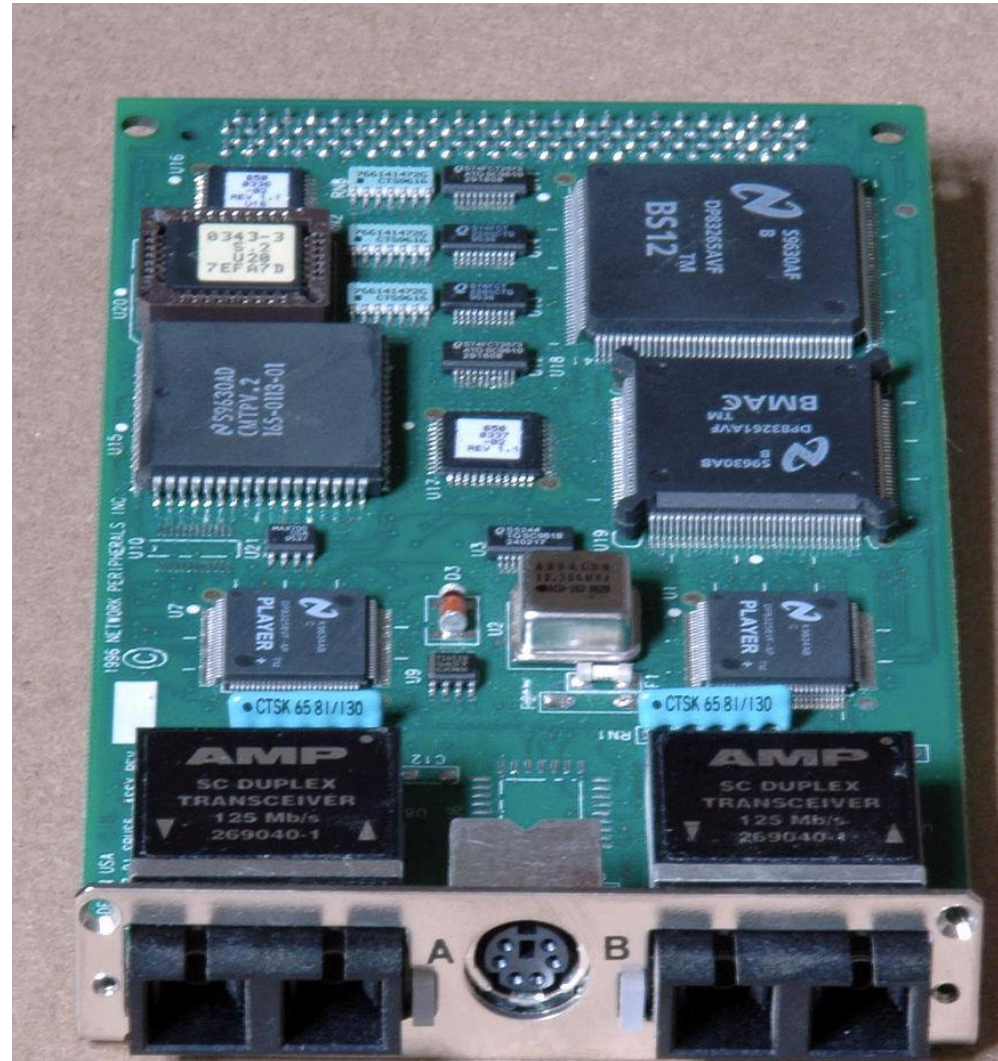


# Dimensionarea unei legături pe fibra optică

Capitolul 7



# Limite putere/bandă a dispozitivelor optoelectronice

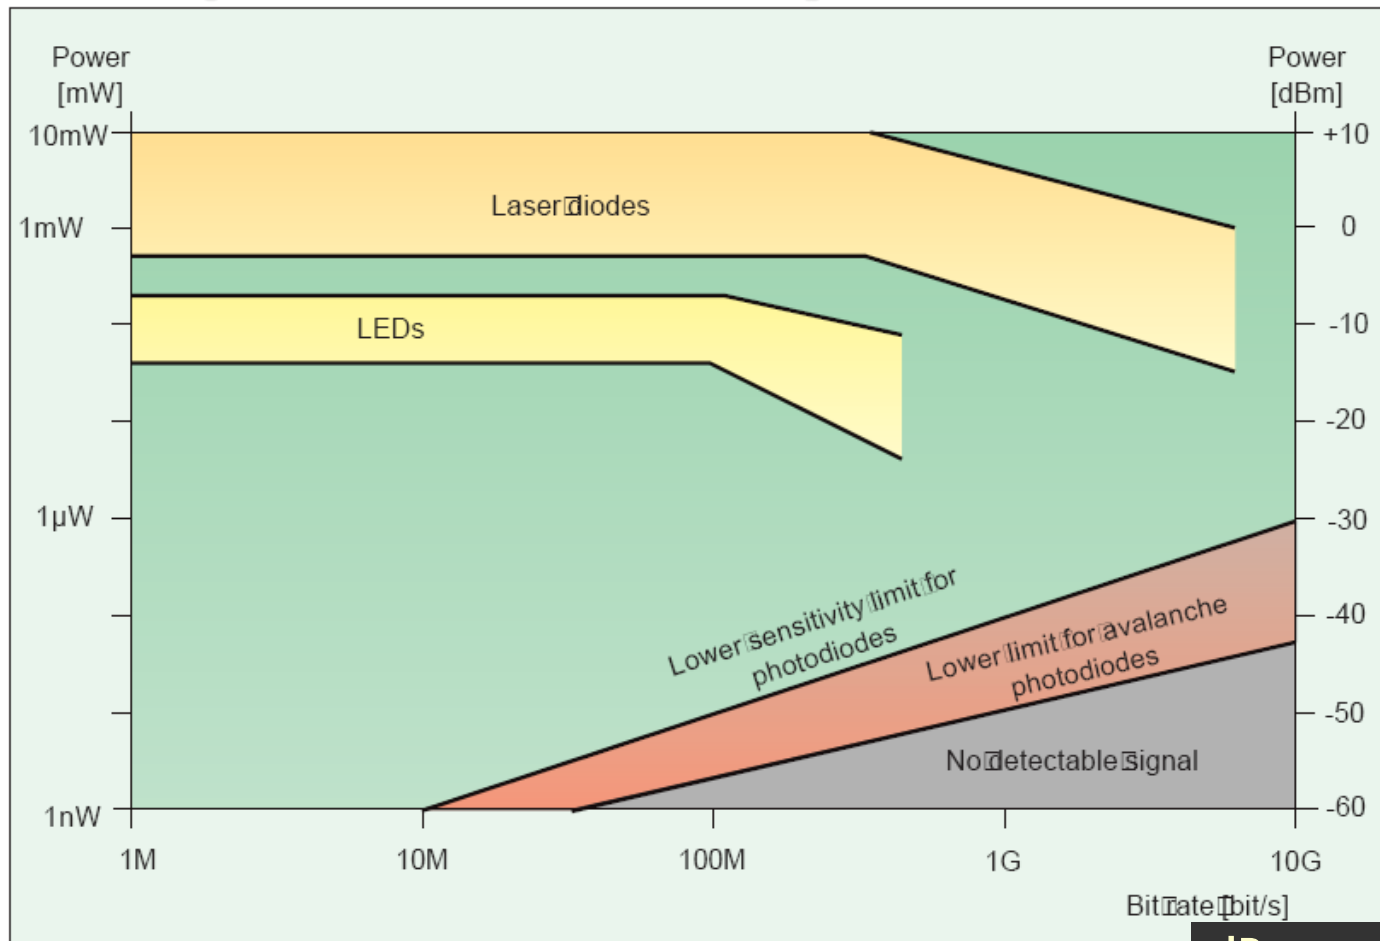


$$\text{dB} = 10 \cdot \log_{10} (P_2 / P_1)$$

$$\text{dBm} = 10 \cdot \log_{10} (P / 1 \text{ mW})$$


$$[\text{dBm}] + [\text{dB}] = [\text{dBm}]$$

# Legatura pe fibra optica

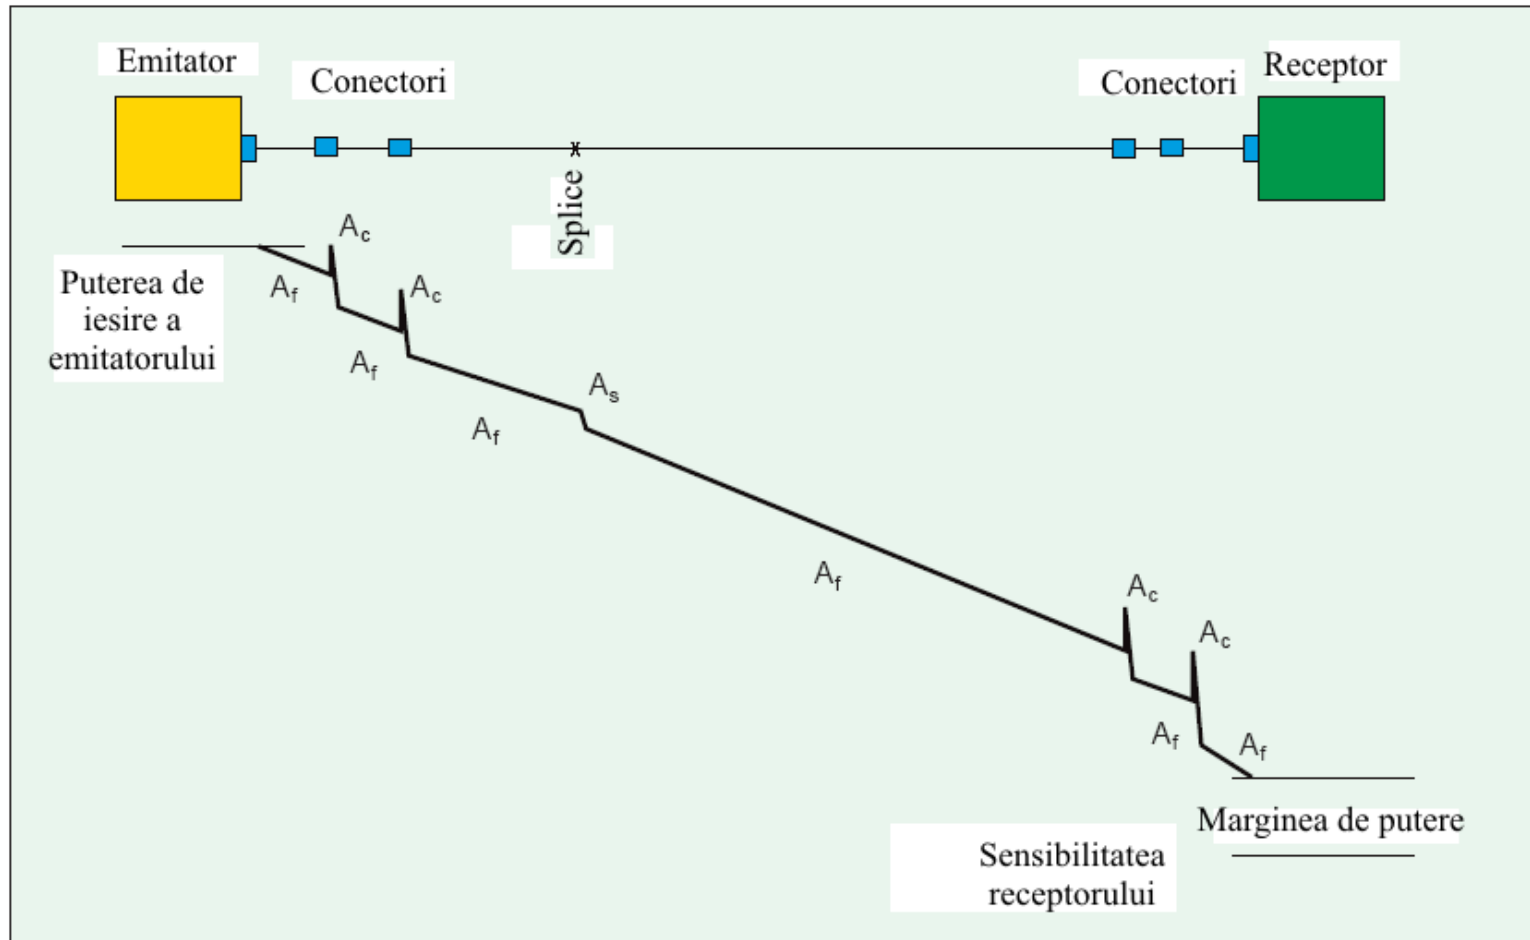

# Pierderi – Apertura numerica

- ▶ **Numai** la trecerea de la apertura numerica mai mare la apertura numerica mai mica

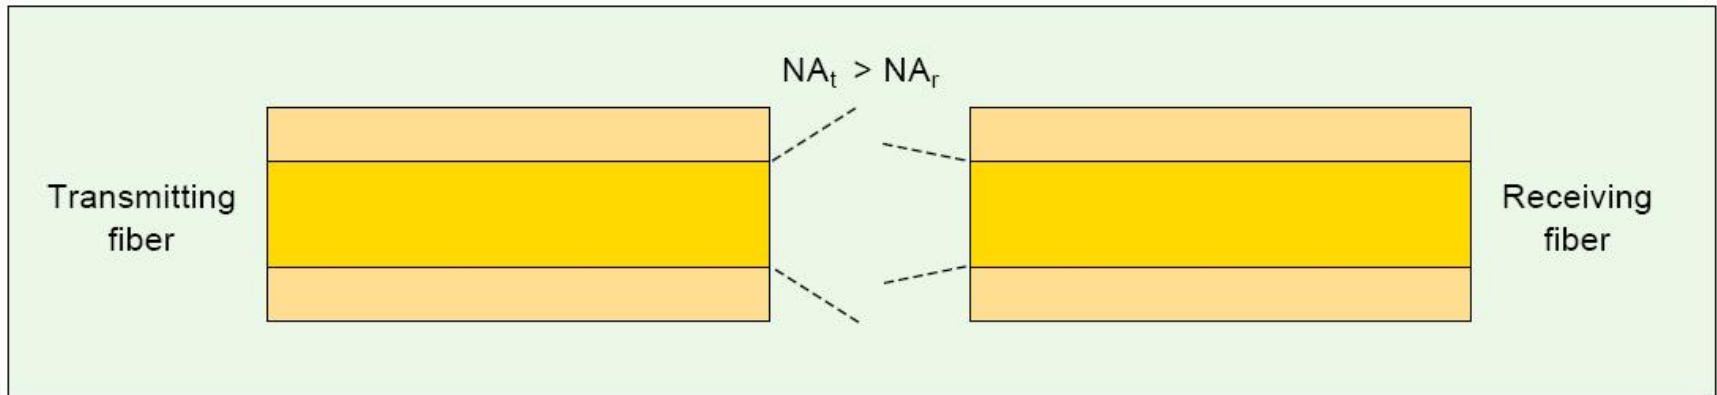


$$\text{Attenuation}_{NA} = 10 \log_{10} \left( \frac{NA_r}{NA_t} \right)^2$$



# Pierderi – Diametrul miezului

- ▶ **Numai** la trecerea de la diametru mai mare la diametru mai mic


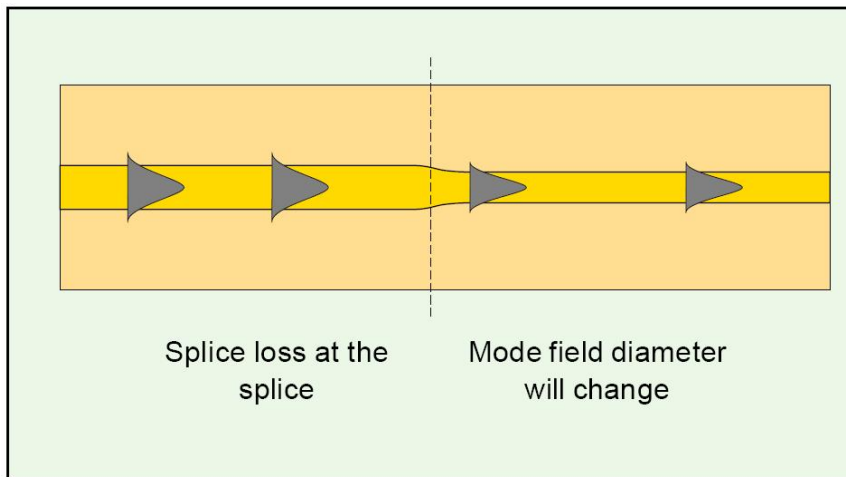


$$\text{Attenuation}_{\varnothing} (\text{multimode}) = -10 \log_{10} \left( \frac{\varnothing_r}{\varnothing_t} \right)^2$$

$$\text{Attenuation}_{\varnothing} (\text{single-mode}) = -20 \log \left( \frac{2 w_1 w_2}{w_1^2 + w_2^2} \right)$$


**w = MFD !!**

# Pierderi – Nealinierarea axelor

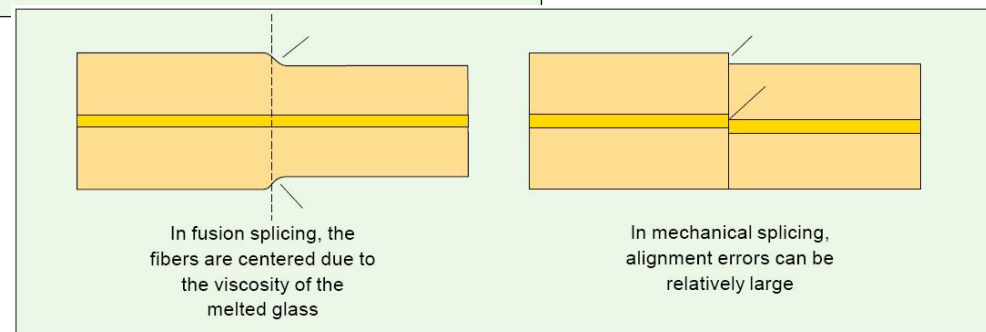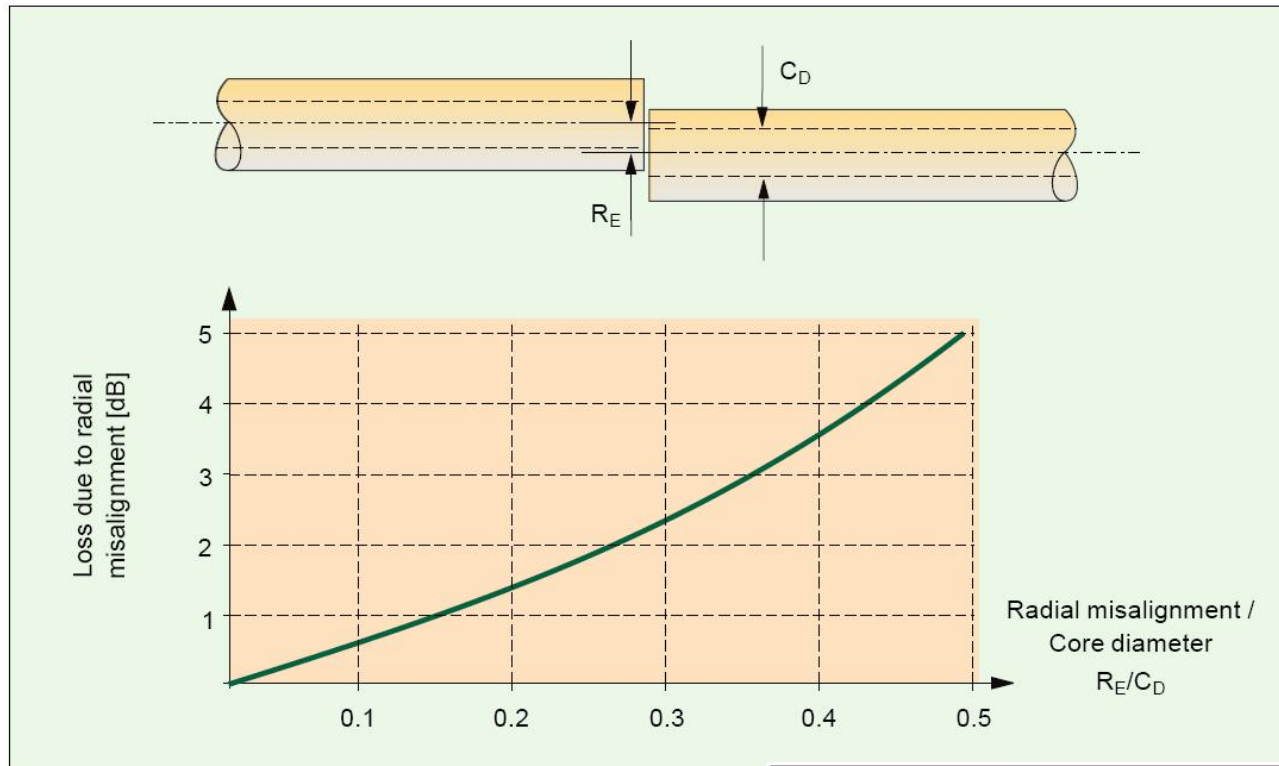




# Pierderi – unghi

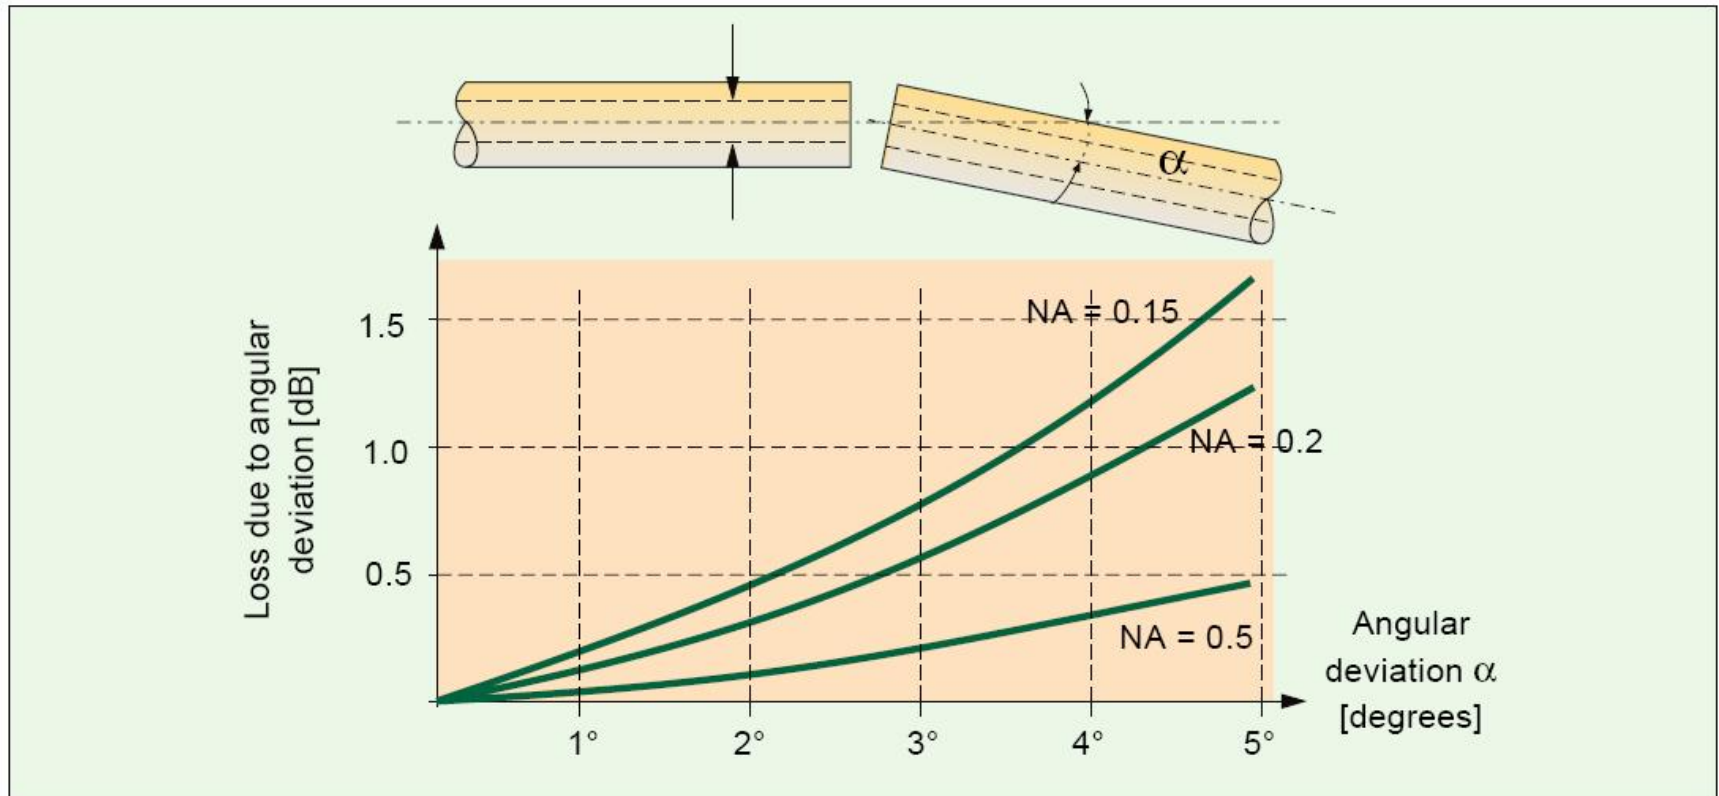

# Pierderi – distanta

- ▶ Se foloseste un gel cu indice de refractie egal cu al fibrelor
- ▶ Se aduna pierderile generate de reflexie pe o lamela (pana la 16%)

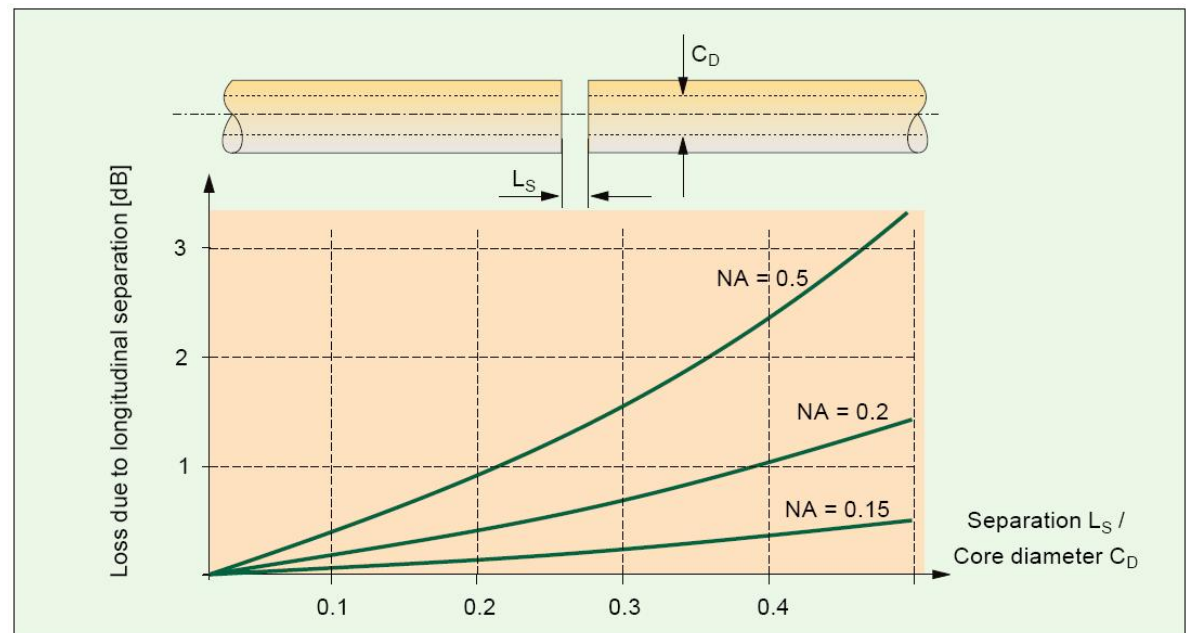

# Exemplu

- ▶ Trebuie să realizați o legătură pe fibră optică pe o distanță de 50 km la o viteză de 1Gb/s.

Emitători: = 1.5mW ( $\Delta\lambda=2\text{nm}$ , diverse $\lambda$ )	NA = 0.17	$\Phi = 13\mu\text{m}$
Pierderi splice (tehnologie)	0.15 dB/splice	
Pierderi conector	0.5 dB/conector	
Cablu conexiune: L = 20m	NA = 0.12	fibră: 11/125 $\mu\text{m}$
Cablu conexiune: L = 20m	NA = 0.15	fibră: 11/125 $\mu\text{m}$
Fibra 1	8 X 5km	
Fibra 2	4 X 10km	
Fibra 3	8 X 5km	
Fibra 4	4 X 10km	
Receptor: Sensitivitate = 1 $\mu\text{W}$	NA = 0.25	$\Phi = 30\mu\text{m}$

# Catalog

## Fibra nr. 3

### Optical Specifications

#### Fiber Attenuation

Maximum Attenuation	
Wavelength (nm)	Maximum Value* (dB/km)
1310	0.33 - 0.35
1383**	0.31 - 0.35
1490	0.21 - 0.24
1550	0.19 - 0.20
1625	0.20 - 0.23

\*Maximum specified attenuation value available within the stated ranges.  
 \*\*Attenuation values at this wavelength represent post-hydrogen aging performance.  
 Alternate attenuation offerings available upon request.

#### Attenuation vs. Wavelength

Range (nm)	Ref. $\lambda$ (nm)	Max. $\alpha$ Difference (dB/km)
1285 - 1330	1310	0.03
1525 - 1575	1550	0.02

The attenuation in a given wavelength range does not exceed the attenuation of the reference wavelength ( $\lambda_r$ ) by more than the value  $\alpha$ .

#### Macro-bend Loss

Mandrel Diameter (mm)	Number of Turns	Wavelength (nm)	Induced Attenuation* (dB)
32	1	1550	$\leq 0.03$
50	100	1310	$\leq 0.03$
50	100	1550	$\leq 0.03$
60	100	1625	$\leq 0.03$

\*The induced attenuation due to fiber wrapped around a mandrel of a specified diameter.

#### Point Discontinuity

Wavelength (nm)	Point Discontinuity (dB)
1310	$\leq 0.05$
1550	$\leq 0.05$

### Dimensional Specifications

#### Glass Geometry

Fiber Curl	$\geq 4.0$ m radius of curvature
Cladding Diameter	$125.0 \pm 0.7$ $\mu$ m
Core-Clad Concentricity	$\leq 0.5$ $\mu$ m
Cladding Non-Circularity	$\leq 0.7\%$

### Environmental Specifications

Environmental Test	Test Condition	Induced Attenuation	
		1310 nm, 1550 nm & 1625 nm	(dB/km)
Temperature Dependence	-60°C to +85°C*		$\leq 0.05$
Temperature Humidity Cycling	-10°C to +85°C* up to 98% RH		$\leq 0.05$
Water Immersion	23 $\pm$ 2°C*		$\leq 0.05$
Heat Aging	85 $\pm$ 2°C*		$\leq 0.05$

\*Reference temperature = +23°C

Operating Temperature Range: -60°C to +85°C

#### Cable Cutoff Wavelength ( $\lambda_{ccf}$ )

$\lambda_{ccf} \leq 1260$  nm

#### Mode-Field Diameter

Wavelength (nm)	MFD ( $\mu$ m)
1310	$9.4 \pm 0.4$
1550	$10.6 \pm 0.5$

#### Dispersion

Wavelength (nm)	Dispersion Value [ps/(nm $\cdot$ km)]
1550	$\leq 18$
1625	$\leq 23$

Zero Dispersion Wavelength ( $\lambda_0$ ): 1310 nm  $\leq \lambda_0 \leq 1324$  nm  
 Zero Dispersion Slope ( $S_0$ ):  $\leq 0.092$  ps/(nm $\cdot$ km)

#### Polarization Mode Dispersion (PMD)

PMD Link Design Value	Value (ps $\sqrt$ /km)
Maximum Individual Fiber	$\leq 0.2$

\*Complies with IEC 60794-3: 2001, Section 5.5, Method 1, September 2001.

The PMD link design value is a term used to describe the PMD of concatenated lengths of fiber (also known as PMD<sub>0</sub>). This value represents a statistical upper limit for total link PMD. Individual PMD values may change when cabled. Corning's fiber specification supports network design requirements for a 0.5 ps $\sqrt$ km maximum PMD.

#### Coating Geometry

Coating Diameter	$245 \pm 5$ $\mu$ m
Coating-Cladding Concentricity	$< 12$ $\mu$ m

### Mechanical Specifications

#### Proof Test

The entire fiber length is subjected to a tensile stress  $\geq 100$  kpsi (0.7 GPa)\*.

\*Higher proof test levels available.

#### Length

Fiber lengths available up to 50.4\* km/spool.  
 \*Longer spliced lengths available.

### Performance Characterizations

Characterized parameters are typical values.

Core Diameter	8.2 $\mu$ m
Numerical Aperture	0.14
	NA is measured at the one percent power level of a one-dimensional far-field scan at 1310 nm.

Zero Dispersion Wavelength ( $\lambda_0$ )	1317 nm
Zero Dispersion Slope ( $S_0$ )	0.088 ps/(nm $\cdot$ km)
Effective Group Index of Refraction ( $N_{eff}$ )	1310 nm: 1.4670 1550 nm: 1.4677
Fatigue Resistance Parameter ( $N_f$ )	20
Coating Strip Force	Dry: 0.6 lbs. (3N) Wet, 14-day room temperature: 0.6 lbs. (3N)

Rayleigh Backscatter Coefficient (for 1 $\mu$ s Pulse Width)	1310 nm: -77 dB 1550 nm: -82 dB
Stimulated Brillouin Scattering Threshold	20 dBm <sup>†</sup>

Notes:  
 (1) When characterized with a transmitter specifying 17 dBm SBS threshold over standard single-mode fiber. While absolute SBS threshold is a function of distance and signal format, NexCor fiber offers a 3 dB improvement over standard single-mode fiber independent of these variables.

### Formulas

$$Dispersion = D(\lambda) = -\frac{S_0}{4} \left[ \lambda - \frac{\lambda_0}{\lambda} \right] \text{ ps/(nm}\cdot\text{km)}$$

for 1200 nm  $\leq \lambda \leq 1625$  nm

$\lambda =$  Operating Wavelengths

#### Cladding Non-Circularity

$$\text{Cladding Non-Circularity} = \left[ \frac{\text{Min. Cladding Diameter}}{\text{Max. Cladding Diameter}} \right] \times 100$$

#### How to Order

Contact your sales representative, or call the Optical Fiber Customer Service Department:  
 Ph: 607-248-2000 (U.S. and Canada)  
 +44-1244-287-4317 (Europe)  
 Email: opticalfibres@corning.com  
 Please specify the fiber type, attenuation and quantity when ordering.

Corning Incorporated  
[www.corning.com/opticalfiber](http://www.corning.com/opticalfiber)  
 One Riverfront Plaza  
 Corning, NY 14831  
 U.S.A.  
 Ph: 800-525-2324 (U.S. and Canada)  
 607-786-8125 (International)  
 Fax: 800-539-3632 (U.S. and Canada)  
 607-786-8344 (International)  
 Email: cofc@corning.com

Europe  
 Ph: 00 800 6620 6621 (U.K., Ireland, Italy, France, Germany, The Netherlands, Spain and Sweden)  
 +1 607 786 8125 (All Other Countries)  
 Fax: +1 607 786 8344

Asia Pacific  
 Australia  
 Ph: 1-800-148-690  
 Fax: 1-800-148-568

Indonesia  
 Ph: 001-800-015-721-1261  
 Fax: 001-800-015-721-1262

Malaysia  
 Ph: 1-800-80-3156  
 Fax: 1-800-80-3155

Philippines  
 Ph: 1-800-1-116-0338  
 Fax: 1-800-1-116-0339

Singapore  
 Ph: 800-1300-955  
 Fax: 800-1300-956

Thailand  
 Ph: 001-800-1-1-721-1261  
 Fax: 001-800-1-1-721-1264

Latin America  
 Brazil  
 Ph: 00817-762-4732  
 Fax: 00817-762-4996

Mexico  
 Ph: 001-800-235-1719  
 Fax: 001-800-339-1472

Venezuela  
 Ph: 800-1-4418  
 Fax: 800-1-4419

Greater China  
 Email: CCcofc@corning.com

Beijing  
 Ph: (86) 10-6505-5066  
 Fax: (86) 10-6505-5077

Hong Kong  
 Ph: (852) 2807-2723  
 Fax: (852) 2807-2152

Shanghai  
 Ph: (86) 21-3222-4668  
 Fax: (86) 21-6288-1575

Taiwan  
 Ph: (886) 2-2716-0338  
 Fax: (886) 2-2716-0339

NexCor is a trademark, and Corning and SM-28e are registered trademarks, of Corning Incorporated, Corning, N.Y.

Any warranty of any nature relating to any Corning optical fiber is only contained in the written agreement between Corning Incorporated and the direct purchaser of such fiber.

©2003 Corning Incorporated

# Intrebari

- ▶ (1 p) Ce lungime de undă veți alege pentru emițător? Justificați.
- ▶ (2p) Alegeți fibrele pe care le veți utiliza. Justificați. Realizați schița legăturii
- ▶ (1 p) Puteți realiza o legătură funcțională? Justificați.

<i>Zero Dispersion Wavelength (<math>\lambda_0</math>)</i>	1317 nm
<i>Zero Dispersion Slope (<math>S_0</math>)</i>	0.088 ps/(nm <sup>2</sup> •km)

# Legatura


## ► Bilantul puterilor

$$A_{tot}[\text{dB}] = \sum_i A_i[\text{dB}]$$

$$P_e[\text{dBm}] \pm A_{tot}[\text{dB}] \geq S_r[\text{dBm}] + M[\text{dB}]$$


*Maximum Attenuation*

Wavelength (nm)	Maximum Value* (dB/km)
1310	0.33 – 0.35
1383**	0.31 – 0.35
1490	0.21 – 0.24
1550	0.19 – 0.20
1625	0.20 – 0.23

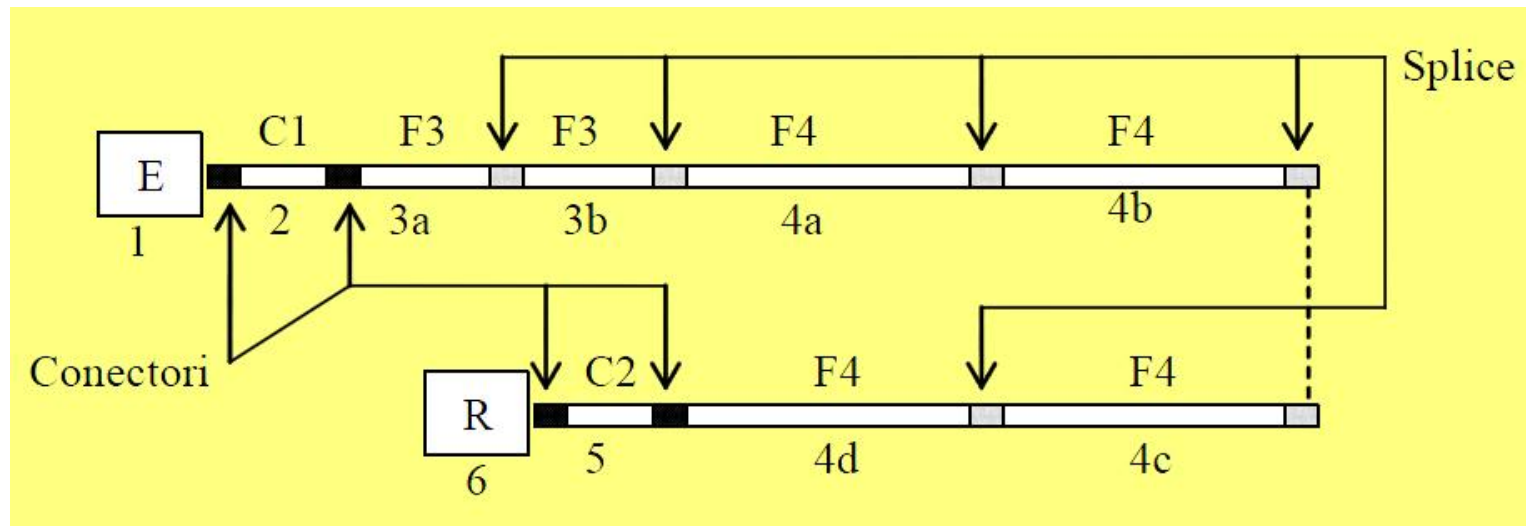



# Sistem

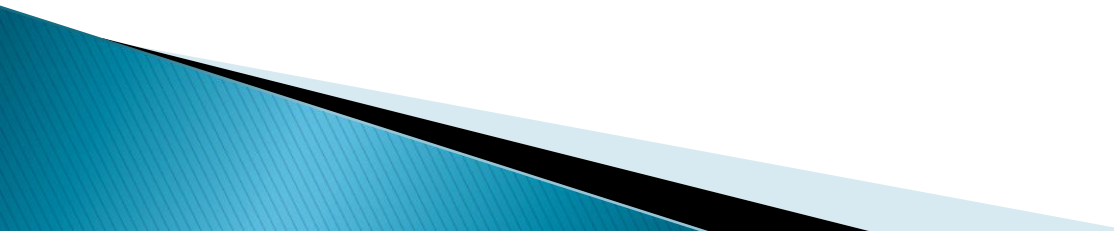- ▶ 1. Emitator
  - ▶ 2. Cablu 1 de conexiune
  - ▶ 3. Fibra 3 (2 cabluri a 5 km fiecare: 3a,3b)
  - ▶ 4. Fibra 4 (4 cabluri a 10 km fiecare: 4a,4b,4c,4d)
  - ▶ 5. Cablu 2 de conexiune
  - ▶ 6. Receptor
- 

# Atenuare

## ▶ Distribuita

- Macrocurburi
- Microcurburi
- Imprastiere
- Absorbție

$$\text{Atenuare}_D [\text{dB/km}] = \frac{\text{Pierderi}[\text{dB}]}{\text{lungime}[\text{km}]}$$

## ▶ Localizata

- conectori
- splice
- tranzitii

$$\text{Atenuare}_L [\text{dB}] = \text{Pierderi}[\text{dB}]$$

$$A_{\text{TOT}} [\text{dB}] = A_L [\text{dB}] + A_D [\text{dB/km}] \cdot L [\text{km}]$$

# Pierderi

- ▶ Atenuare in fibra
- ▶ Atenuare datorata conectorilor
- ▶ Atenuare datorata splice-urilor
- ▶ Atenuare datorata diferentelor de apertura numerica
  - apare **numai** la trecerea de la un dispozitiv cu NA mai mare la un dispozitiv cu NA mai mic
- ▶ Atenuare datorata diferentelor de diametru
  - apare **numai** la trecerea de la un dispozitiv cu diametru mai mare la un dispozitiv cu diametru mai mic

# Dispersie

$$\Delta\tau_{\text{mod}} \cong \frac{L \cdot n_2 \cdot \Delta}{2\sqrt{3} \cdot c} \approx \frac{L \cdot NA^2}{4\sqrt{3} \cdot c \cdot n_2}$$

$$\Delta\tau_{\text{mod}} \cong \frac{L \cdot n_2 \cdot \Delta^2}{4\sqrt{3} \cdot c}$$

$$\Delta\tau_{\text{cr}} = D(\lambda) \cdot \Delta\lambda \cdot L$$

$$D(\lambda) = \frac{S_0}{4} \cdot \left( \lambda - \frac{\lambda_0^4}{\lambda^3} \right)$$

$$\Delta\tau_{\text{tip}} = \sum_i \Delta\tau_i$$

$$\Delta\tau_{\text{tot}} = \sqrt{\Delta\tau_{\text{cr}}^2 + \Delta\tau_{\text{mod}}^2}$$

$$B_{\text{opt}} = \frac{0.44}{\Delta\tau_{\text{tot}} [\text{ns}]} \quad [\text{GHz}]$$

$$B_{\text{opt}} = \sqrt{2} B_{\text{el}}$$

$$V [\text{Gb/s}] \cong 2 \cdot B_{\text{el}}$$



$$B_{\text{3dB,electric}} (\text{GHz}) = \frac{0.35}{T(\text{ns})}$$

$$\text{NRZ}_{\text{viteza date}} (\text{Gbit/s}) = \frac{1}{T_{\text{impuls}} (\text{ns})} \leq \frac{0.67}{T(\text{ns})}$$

# Produs Banda · Distanța

$$\Delta\tau_{\text{mod}} \cong \frac{L \cdot n_2 \cdot \Delta}{2\sqrt{3} \cdot c} \approx \frac{L \cdot NA^2}{4\sqrt{3} \cdot c \cdot n_2}$$

$$\Delta\tau_{\text{tot}} = \sqrt{\Delta\tau_{\text{cr}}^2 + \Delta\tau_{\text{mod}}^2}$$

$$\Delta\tau_{\text{cr}} = D(\lambda) \cdot \Delta\lambda \cdot L$$

$$\Delta\tau_{\text{tot}} = \text{const} \cdot L$$

$$B_{\text{opt}} = \frac{0.44}{\Delta\tau_{\text{tot}} [\text{ns}]} \quad [\text{GHz}]$$

$$B_{\text{opt}} = \sqrt{2} B_{\text{el}}$$

$$V [\text{Gb/s}] \cong 2 \cdot B_{\text{el}}$$

$$V [\text{Gb/s}] \cong \frac{\text{const}}{L}$$

$$V [\text{Gb/s}] \cdot L [\text{km}] \cong \text{const}$$

# Lungime maxima

- ▶ limitata de atenuare

$$A_{\text{TOT}}[\text{dB}] = A_L[\text{dB}] + A_D[\text{dB/km}] \cdot L[\text{km}]$$

$$\text{Atenuare}[\text{dB/km}] = \frac{\text{Pierderi}[\text{dB}]}{\text{lungime}[\text{km}]} \quad L_{\text{max}} \Rightarrow \Delta P_{\text{min}}, A_{D\text{max}}$$

$$L_{\text{max}} = \frac{\Delta P_{\text{min}}[\text{dB}]}{A_{D\text{max}}[\text{dB/km}]} = \frac{P_{e\text{min}}[\text{dBm}] - S_{r\text{max}}[\text{dBm}] - A_L[\text{dB}]}{A_{D\text{max}}[\text{dB/km}]}$$



# Lungime maxima

- ▶ limitata de viteza

$$B_{el\min} \cong \frac{V_{\min} [Gb/s]}{2}$$

$$B_{opt\min} = \sqrt{2} B_{el\min}$$

$$\Delta\tau_{tot\max} [\text{ns}] = \frac{0.44}{B_{opt\min} [\text{GHz}]}$$

$$L_{\max} = \frac{\Delta\tau_{\max}}{D(\lambda) \cdot \Delta\lambda}$$

de obicei problema distantei maxime se pune numai pentru fibre monomod

# Calculul atenuarii

$$\text{Pierderi} = \frac{P_{out}}{P_{in}}$$

$$\text{Pierderi [dB]} = [-] 10 \cdot \log_{10} \left( \frac{P_{out}}{P_{in}} \right)$$


$$\text{Pierderi [dB]} = [-] (P_{out} [\text{dBm}] - P_{in} [\text{dBm}])$$



=



-



$$\text{Atenuare [dB/km]} = \frac{\text{Pierderi [dB]}}{\text{lungime [km]}}$$

# Contact

- ▶ Laboratorul de microunde si optoelectronica
- ▶ <http://rf-opto.etti.tuiasi.ro>
- ▶ [rdamian@etti.tuiasi.ro](mailto:rdamian@etti.tuiasi.ro)