

Optoelectronică

Curs 5

2018/2019

Disciplina 2018/2019

- ▶ 2C/1L Optoelectronică **OPTO**
- ▶ **Minim 7 prezente curs + laborator**
- ▶ Curs – conf. **Radu Damian**
 - an IV μE
 - Vineri 8-11, P5
 - E – 70% din nota
 - **20% test la curs**, saptamana 5 – **22.03.2019 ora 10-11**
 - probleme + (2p prez. curs) + (3 teste) + (bonus activitate)
 - **toate materialele permise**
- ▶ Laborator – **sl. Daniel Matasaru**
 - an IV μE
 - Marti 14-16
 - Joi 8-12 par/impar
 - L – 30% din nota (+Caiet de laborator)

Orar 2018/2019

▶ Curs

- Vineri 8–11, P5
- **2C ⇒ 3C**
 - $14 * 2/3 \approx 9.33$
 - $9 \div 10$ C

Bibliografie

- ▶ <http://rf-opto.etti.tuiasi.ro>
- ▶ Irinel Casian-Botez, "Structuri Optoelectronice", Ed. "CANOVA", Iasi 2001, ISBN 973-96099-2-9
- ▶ Behzad Razavi - Design of Integrated Circuits for Optical Communications, Mc Graw Hill
~~<http://rf-opto.etti.tuiasi.ro/docs/opto/>~~
- ▶ IBM - Understanding Optical Communications: on-line <http://rf-opto.etti.tuiasi.ro>
- ▶ Radu Damian, I Casian, D Matăsaru - „Comunicatii Optice” , Indrumar de laborator, 2005

Fotografii



Date:

Grupa	5304 (2015/2016)
Specializarea	Tehnologii si sisteme de telecomunicatii
Marca	5184

[Trimite email acestui student](#) | [Adauga acest student la lista \(0\)](#)

Detalii curente

Observatii

Finantare	Buget
Bursa	Fara Bursa



Date:

Grupa	5304 (2015/2016)
Specializarea	Tehnologii si sisteme de telecomunicatii
Marca	5244

[Trimite email acestui student](#) | [Adauga acest student la lista \(0\)](#)

Detalii curente

Observatii

Finantare	Buget
Bursa	Bursa de Studii



Date:

Grupa	5304 (2015/2016)
Specializarea	Tehnologii si sisteme de telecomunicatii
Marca	5184

[Acceseaza ca acest student](#)

Note obtinute

Disciplina	Tip	Data	Descriere	Nota	Puncte	Obs.
TW	Tehnologii Web					
	N	17/01/2014	Nota finala	10	-	
	A	17/01/2014	Colocviu Tehnologii Web 2013/2014	10	7.55	
	B	17/01/2014	Laborator Tehnologii Web 2013/2014	9	-	
	D	17/01/2014	Tema Tehnologii Web 2013/2014	9	-	

Reprezentare logaritmică

$$\text{dB} = 10 \cdot \log_{10} (P_2 / P_1)$$

$$\text{dBm} = 10 \cdot \log_{10} (P / 1 \text{ mW})$$

$$0 \text{ dB} = 1$$

$$+ 0.1 \text{ dB} = 1.023 (+2.3\%)$$

$$+ 3 \text{ dB} = 2$$

$$+ 5 \text{ dB} = 3$$

$$+ 10 \text{ dB} = 10$$

$$-3 \text{ dB} = 0.5$$

$$-10 \text{ dB} = 0.1$$

$$-20 \text{ dB} = 0.01$$

$$-30 \text{ dB} = 0.001$$

$$0 \text{ dBm} = 1 \text{ mW}$$

$$3 \text{ dBm} = 2 \text{ mW}$$

$$5 \text{ dBm} = 3 \text{ mW}$$

$$10 \text{ dBm} = 10 \text{ mW}$$

$$20 \text{ dBm} = 100 \text{ mW}$$

$$-3 \text{ dBm} = 0.5 \text{ mW}$$

$$-10 \text{ dBm} = 100 \mu\text{W}$$

$$-30 \text{ dBm} = 1 \mu\text{W}$$

$$-60 \text{ dBm} = 1 \text{ nW}$$

$$[\text{dBm}] + [\text{dB}] = [\text{dBm}]$$

$$[\text{dBm/Hz}] + [\text{dB}] = [\text{dBm/Hz}]$$

$$[\text{x}] + [\text{dB}] = [\text{x}]$$

Calculul atenuarii


$$\text{Pierderi} = \frac{P_{out}}{P_{in}}$$

$$\text{Pierderi [dB]} = [-] 10 \cdot \log_{10} \left(\frac{P_{out}}{P_{in}} \right)$$


$$\text{Pierderi [dB]} = [-] (P_{out} [\text{dBm}] - P_{in} [\text{dBm}])$$



=



-



$$\text{Atenuare [dB/km]} = \frac{\text{Pierderi [dB]}}{\text{lungime [km]}}$$




Recapitulare

Fibra optică

Capitolul 4

Fibra optica

- ▶ un ghid de unda dielectric
 - miez
 - teaca

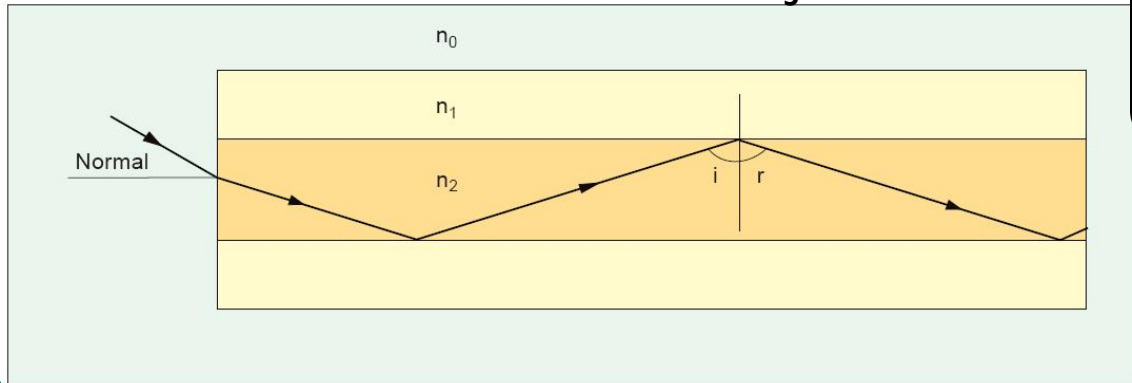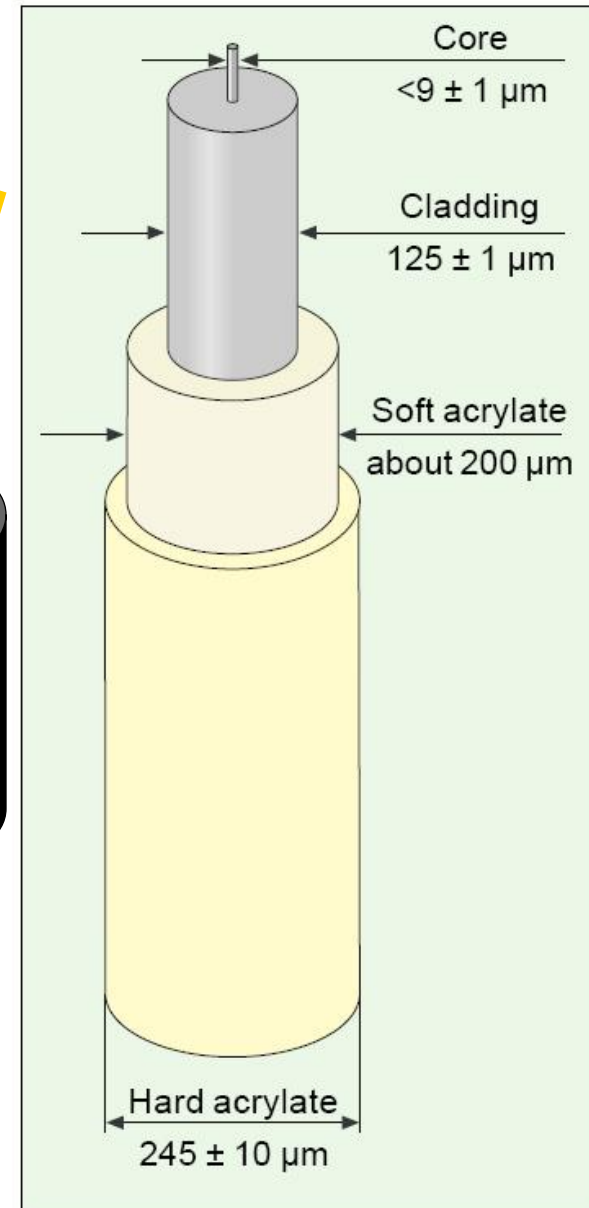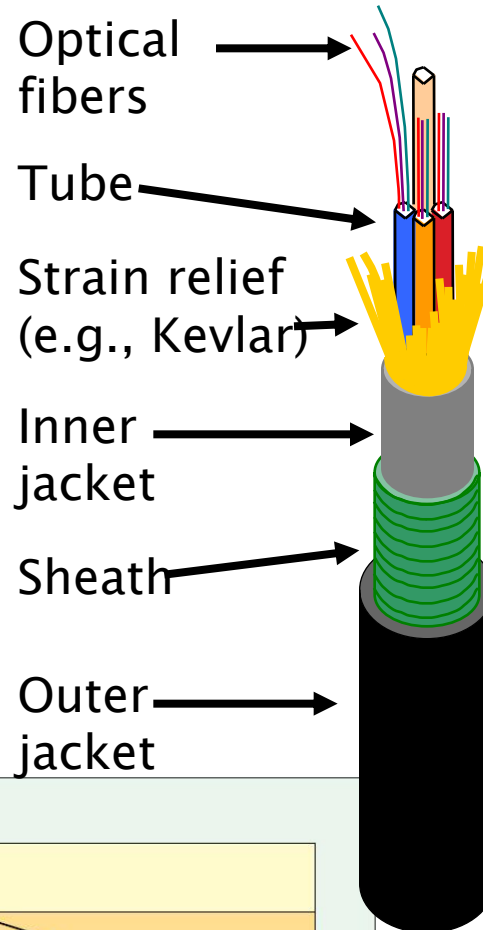

Unghi de acceptanta, apertura numerica

- ▶ Unghi de acceptanta



$$n_0 \cdot \sin \theta_{ACC} = n_2 \cdot \sin \phi_c$$

- ▶ **Apertura numerica**

$$NA = n_0 \cdot \sin \theta_{ACC}$$




$$NA = n_2 \sqrt{\frac{n_2^2 - n_1^2}{n_2^2}} = \sqrt{n_2^2 - n_1^2}$$

n_2 - miez
 n_1 - teaca
 $n_2 > n_1$!!

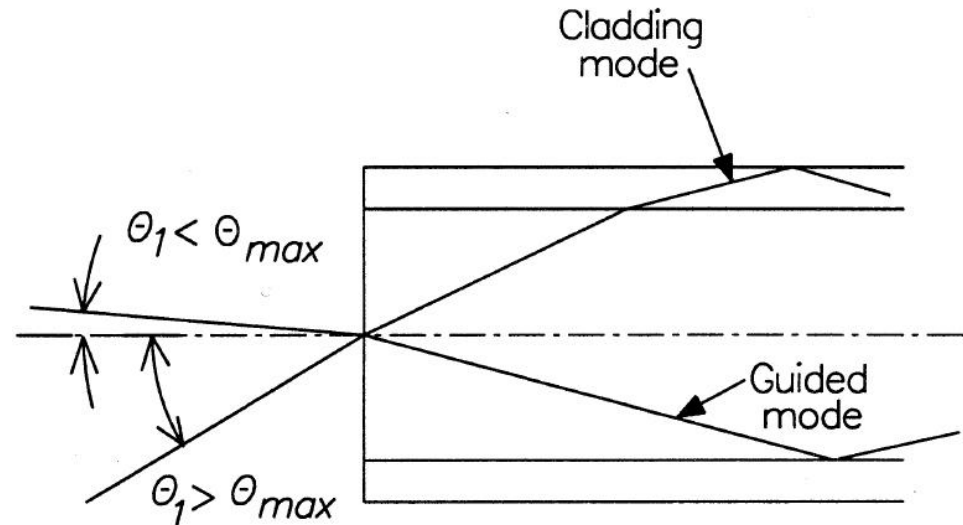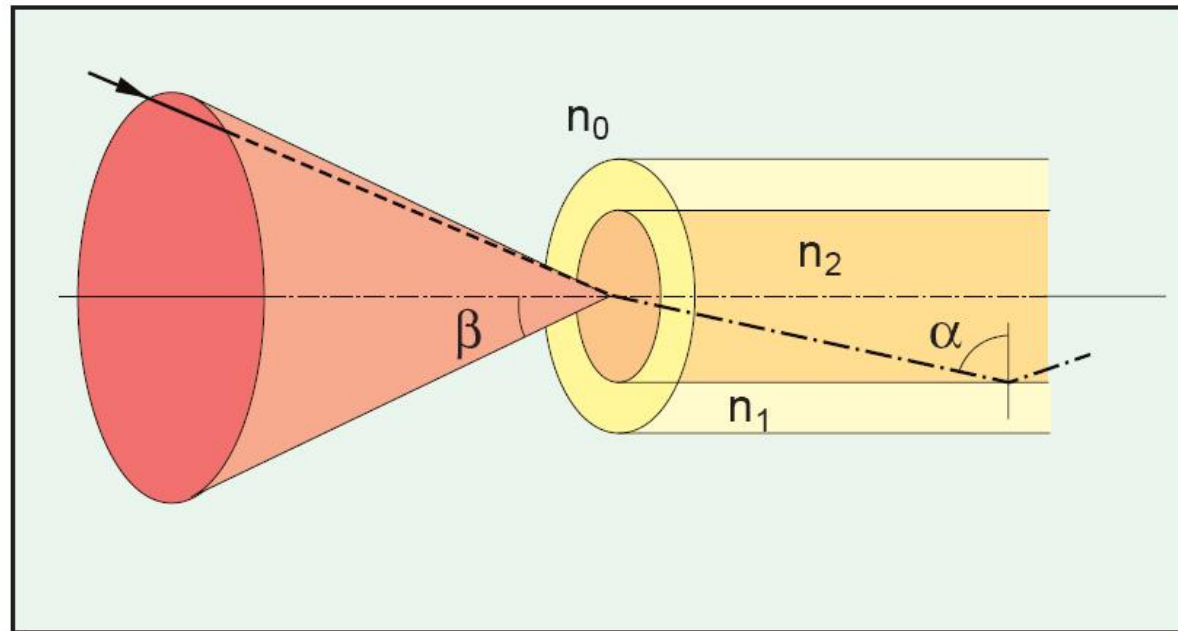

Tipuri de fibra

- ▶ Monomod
- ▶ Multimod
 - cu salt de indice
 - cu indice gradat

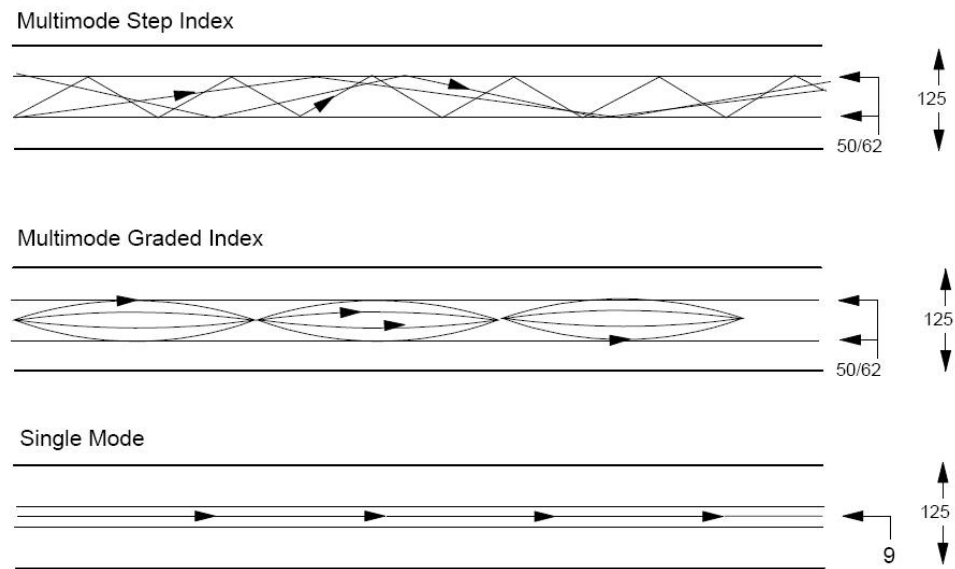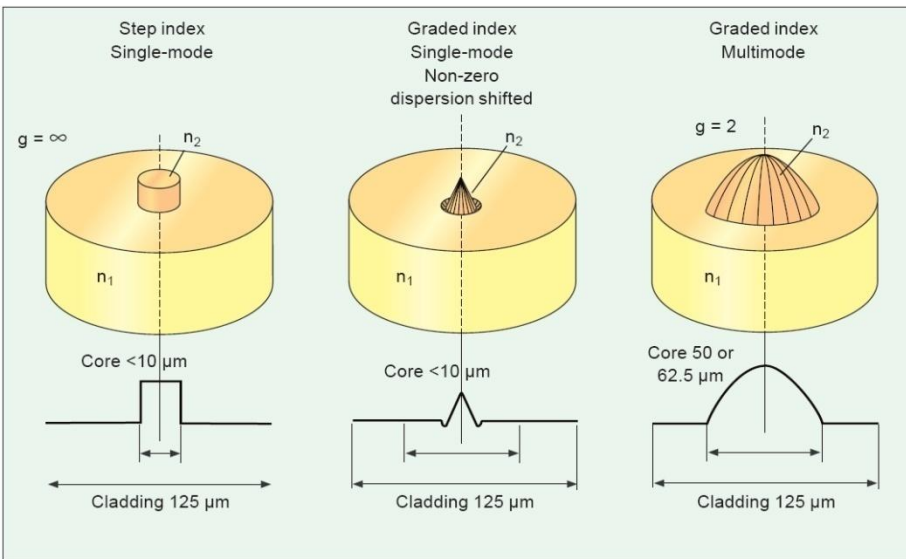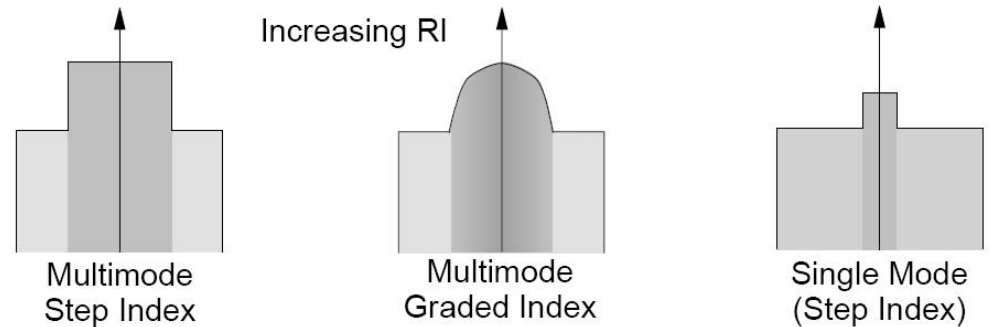


Frecventa normalizata

► Frecventa normalizata

$$V = 2\pi \frac{a}{\lambda} NA = k \cdot a \cdot NA \quad a - \text{raza miezului}$$

$$k = \frac{2\pi}{\lambda}$$

► Numar de moduri

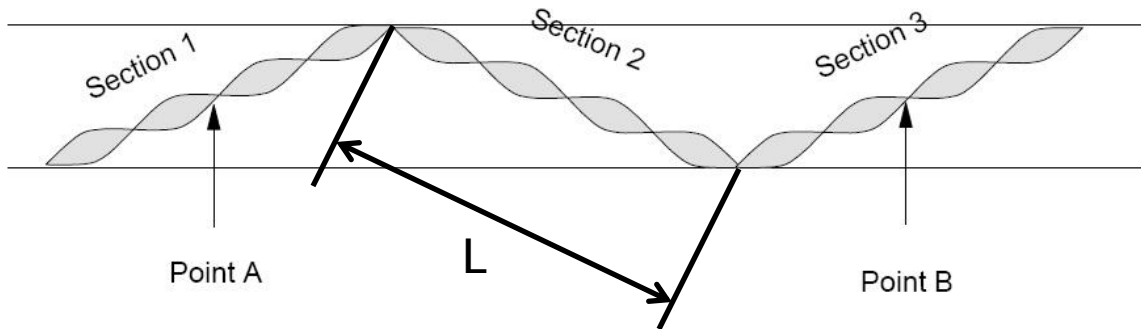


$$L = m \cdot \lambda$$

$$N \approx \frac{V^2}{2} \cdot \frac{g}{g+2}$$

Frecventa normalizata – monomod

► Fibre monomod

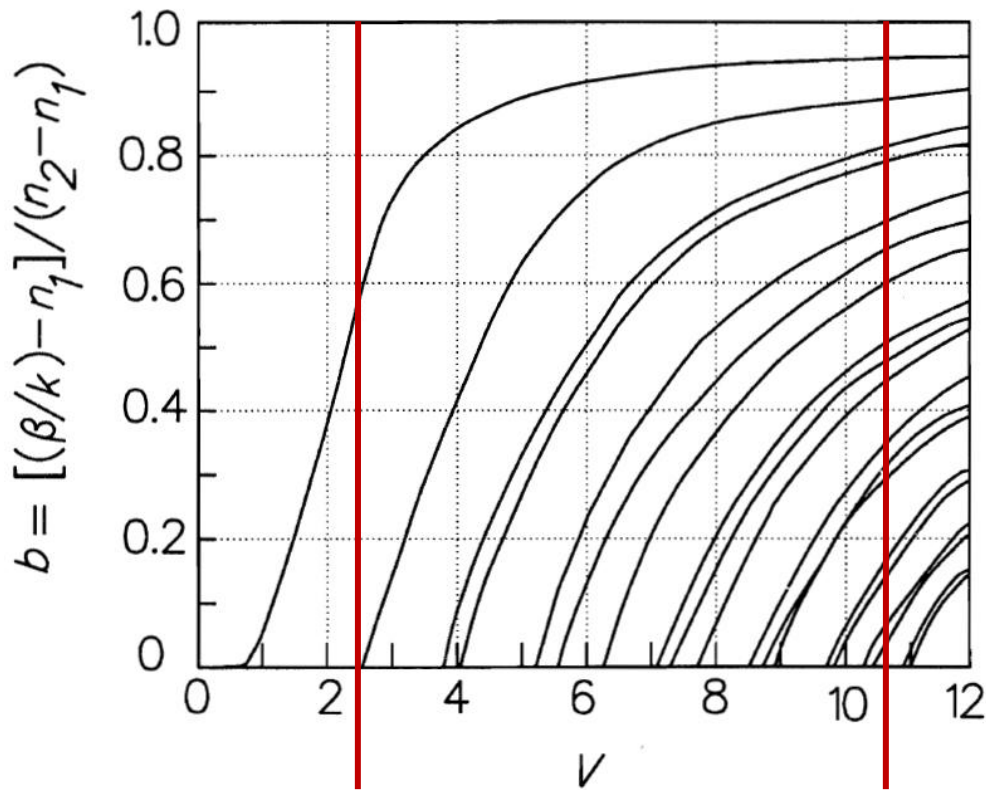

b – coeficient de propagare modal relativ

$$V \leq V_C = 2.405$$

exista un **singur** mod (solutii fc. Bessel)

$$\lambda \geq \lambda_C = \pi \frac{2a}{V_C} NA = \pi \frac{2a}{2.405} NA$$

Exemplu:



$$2a = 8.5 \mu\text{m}$$

$$NA = 0.11$$

$$\lambda_C = \pi \frac{8.5}{2.405} 0.11 = 1210 \text{nm}$$

Propagarea in fibra monomod

- ▶ Propagarea luminii poate fi explicata doar prin teoria electromagnetica
- ▶ Energia campului se extinde in teaca (diametrul efectiv al spotului luminos – MFD, Mode Field Diameter)
- ▶ $MFD > 2a$
- ▶ Adancimea de patrundere in teaca depinde de lungimea de unda, generand dispersia de ghid

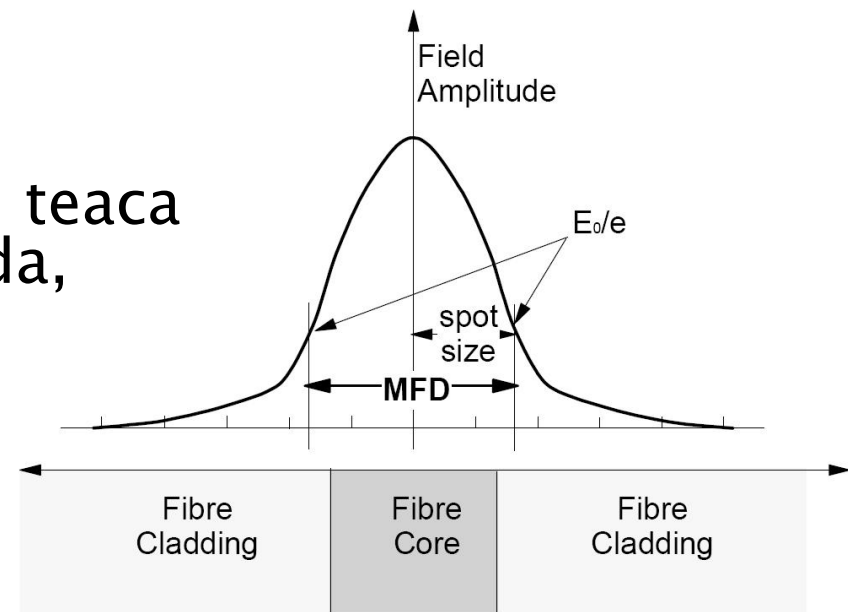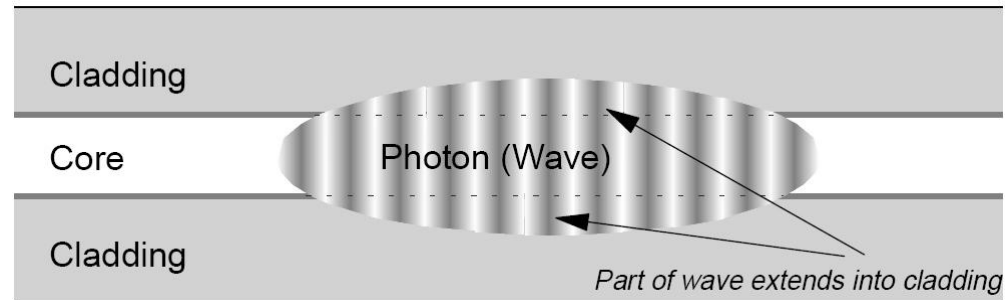

Fenomene de interes

- ▶ Cat de departe pot transmite semnalul luminos pe fibra
 - **atenuare**
- ▶ Cat de rapid pot transmite informația
 - dispersie


Atenuare

- ▶ Macrocurburi
 - utilizator, **localizat**, dB
- ▶ Discontinuitate in fibra
 - utilizator, **localizat**, dB
- ▶ Microcurburi
 - **distribuit**, tehnologie, dB/km
- ▶ Imprastiere
 - **distribuit**, tehnologie, dB/km
- ▶ Absorbție
 - **distribuit**, material, dB/km

$$A[dB] = \sum_i A_i[dB]$$

$$A[dB] = A_i[dB/km] \cdot L[km]$$

Absorbtie


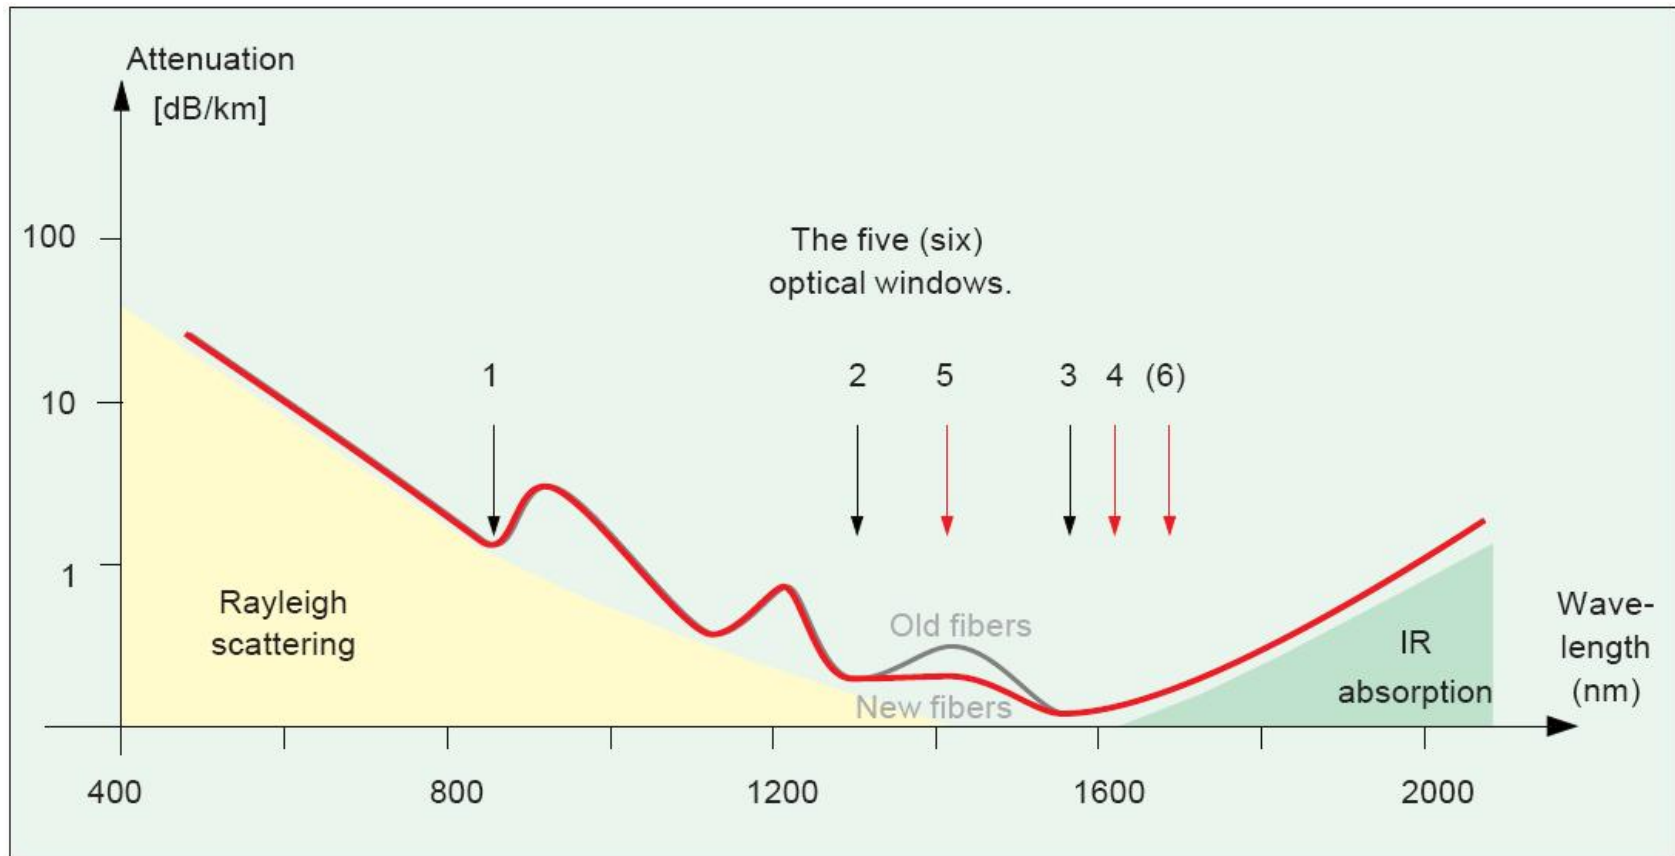


distribuit, material, dB/km

$$A[dB] = A_i[dB/km] \cdot L[km]$$

Absorbentie OH

- ▶ Absorbentie
 - 950nm
 - 1244nm
 - 1383nm
- ▶ Apa!

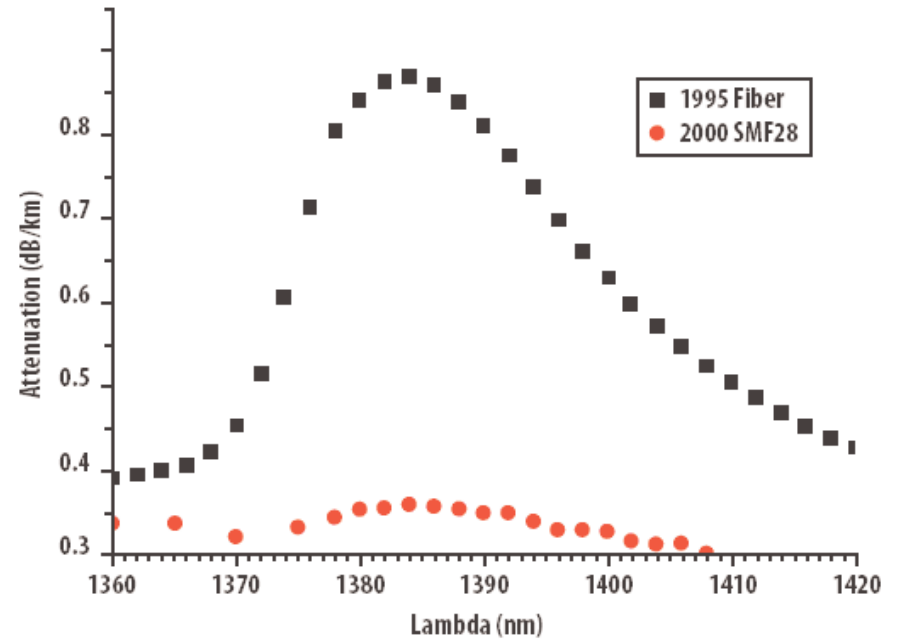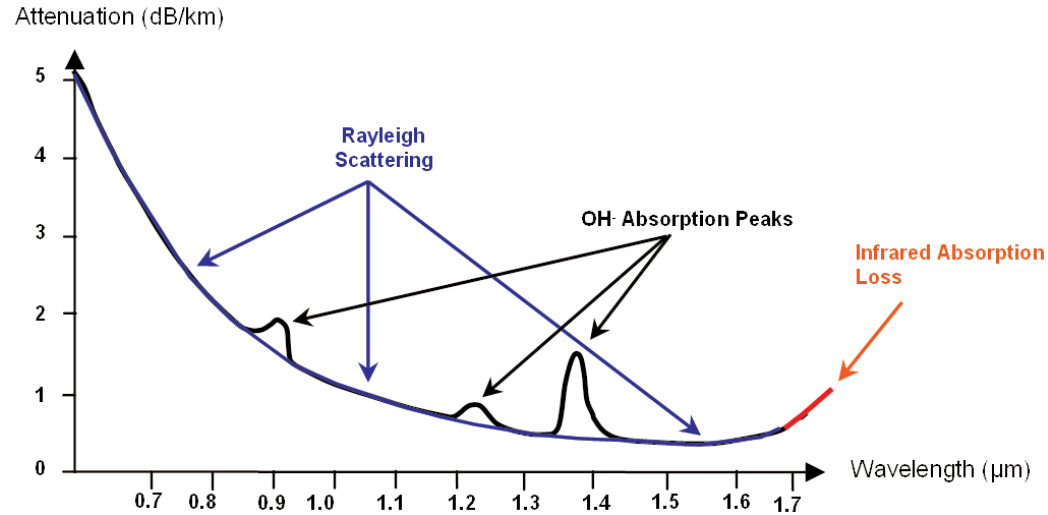


Fiber Attenuation Comparison

Efecte neliniare in fibra


- ▶ **Stimulated Brillouin Scattering, SBC**
 - difractia luminii inspre emitator datorita undelor mecano-acustice generate in fibra
 - 6–10 dBm
- ▶ **Stimulated Raman Scattering, SRS**
 - interactiunea luminii cu vibratiile moleculare
 - 27 dBm (~1W)
- ▶ **Self Phase Modulation, SPM**
 - Frontiera impulsului implica indice de refractie variabil in timp moduland faza impulsului
 - 5 dBm
 - Cross Phase Modulation, CPM
- ▶ **Four-Wave Mixing, FWM**
 - 0 dBm

Four-Wave Mixing, FWM

Two Channels

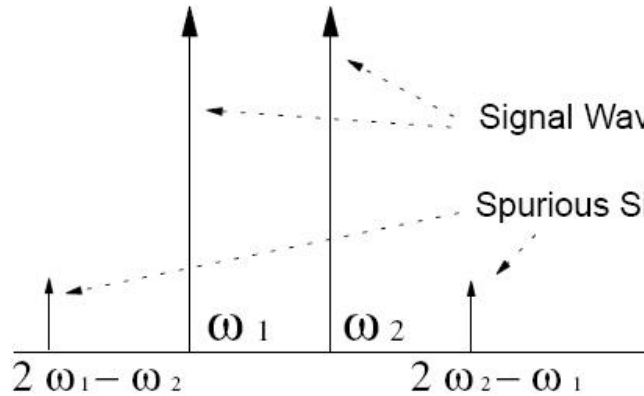

Three Channels

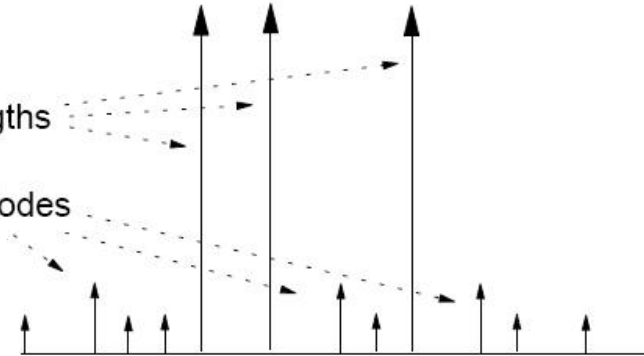


$$NL = \frac{1}{2}(N^3 - N^2)$$

$$N = 2, NL = 4$$

$$N = 3, NL = 9$$

$$N = 16, NL = 1920$$

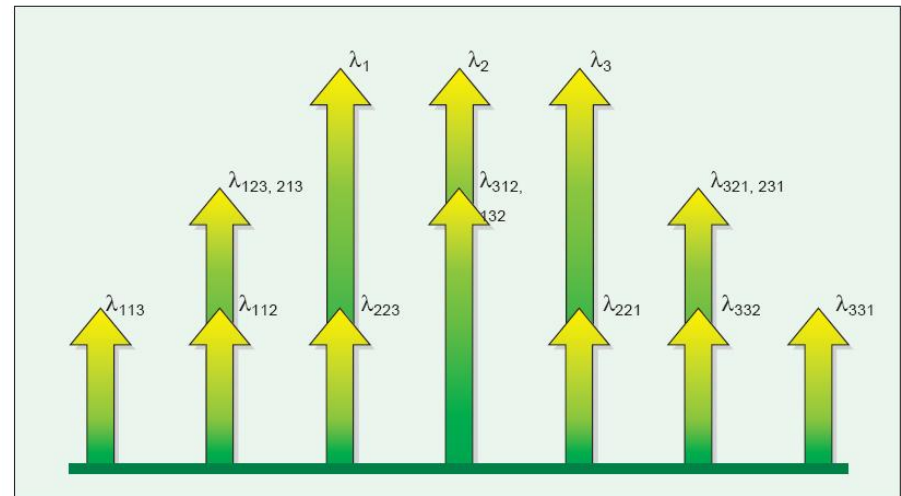

Continuare




Fenomene de interes


- ▶ Cat de departe pot transmite semnalul luminos pe fibra
 - atenuare
- ▶ Cat de rapid pot transmite informația
 - **dispersie**

Dispersia


- ▶ Propagarea cu viteze diferite a radiatiilor cu trasee/lungimi de unda diferite
 - intermodala (modala – depinde de prezenta modurilor)
 - intramodala (cromatica – depinde de lungimea de unda)
 - de material
 - de ghid

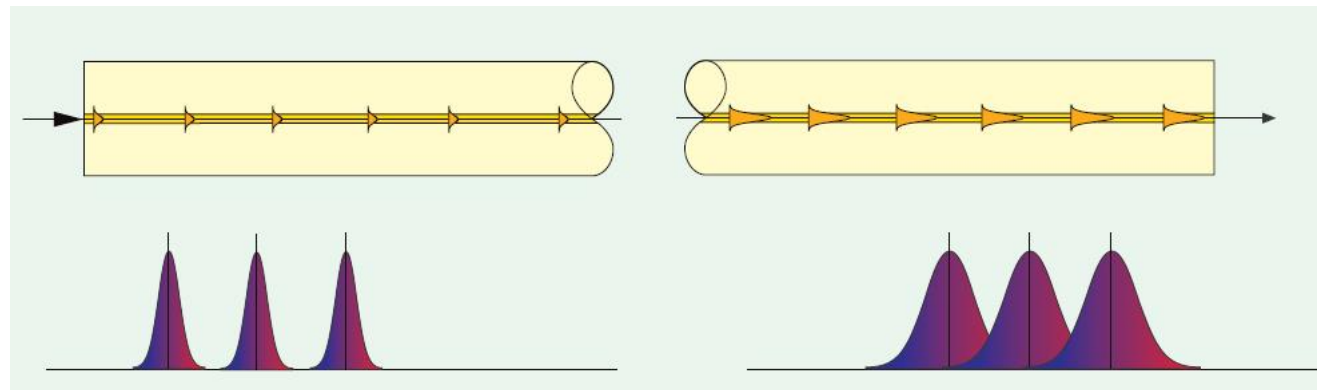

Dispersia modala

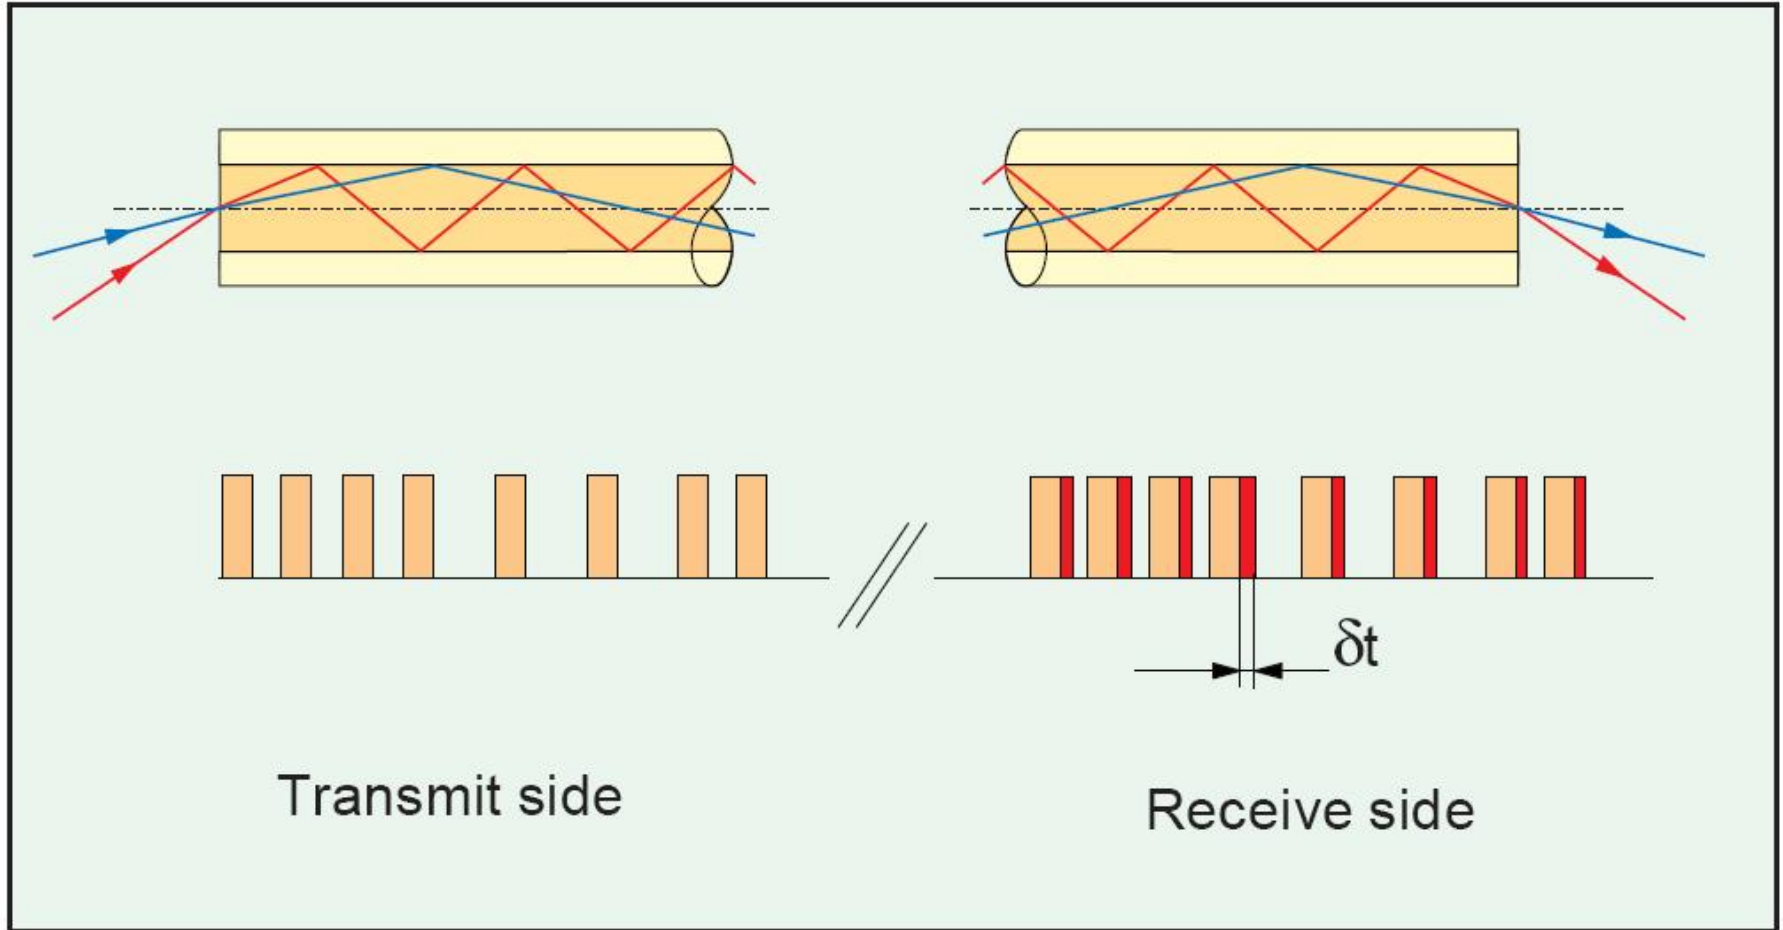

Dispersia modala

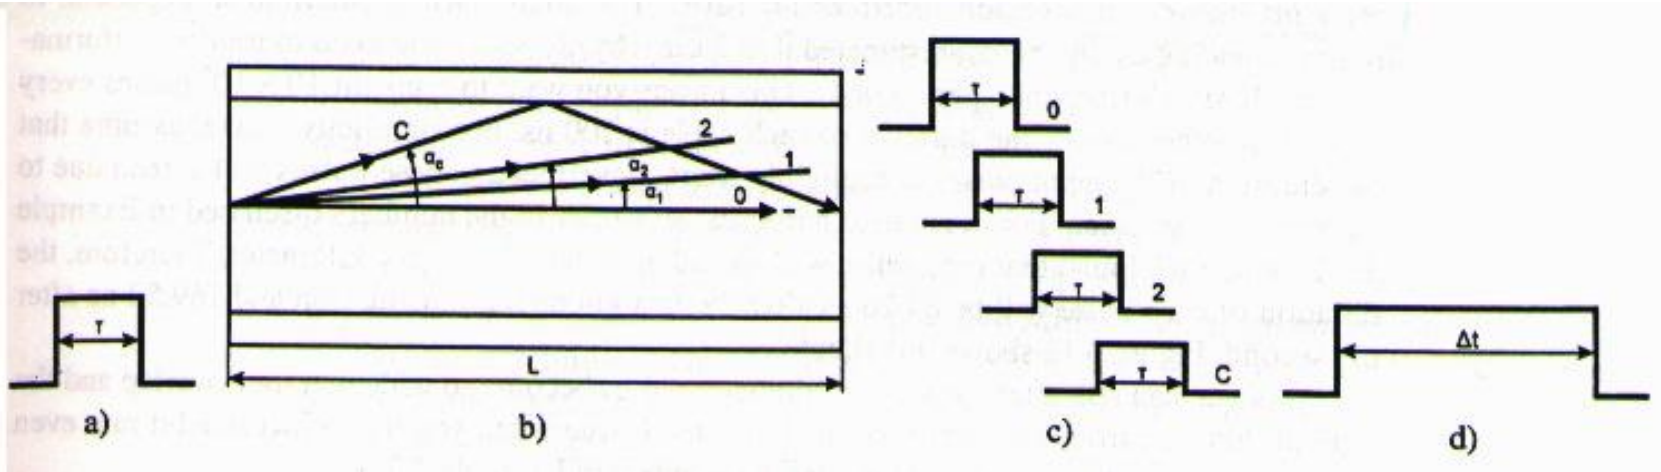

$$t_0 = \frac{L}{v}$$

$$t_c = \frac{L}{v \cdot \cos \alpha_c}$$

$$v = \frac{c}{n_2}$$

$$\cos \alpha_c = NA$$

$$\Delta t_{SI} = t_c - t_0 = \frac{L \cdot n_2}{c} \cdot \left(\frac{n_2 - n_1}{n_2} \right)$$

$$\Delta t_{SI} = t_c - t_0 = \frac{L \cdot n_2}{c} \cdot \Delta$$

$$\Delta = \frac{n_2 - n_1}{n_1} \lll 1$$

$$\Delta t_{SI} = t_c - t_0 \approx \frac{L}{2 \cdot c \cdot n_2} \cdot (NA)^2$$

Dispersia modala

▶ salt de indice

$$dt = \frac{L \cdot n_2^2}{c \cdot n_1} \left(\frac{n_2 - n_1}{n_2} \right) \approx \frac{L \cdot NA^2}{2 \cdot c \cdot n_2}$$

intarzierea intre
moduri cand

$$\Delta = \frac{n_2 - n_1}{n_1} \ll 1$$

$$\Delta \tau_{\text{mod}}^2 = \frac{1}{3} \left(\frac{dt}{2} \right)^2$$

$$\Delta \tau_{\text{mod}} \cong \frac{L \cdot n_2 \cdot \Delta}{2\sqrt{3} \cdot c} \approx \frac{L \cdot NA^2}{4\sqrt{3} \cdot c \cdot n_2}$$

▶ indice gradat

$$dt = \frac{L \cdot n_2 \cdot \Delta^2}{2c} \approx \frac{L \cdot NA^4}{8 \cdot c \cdot n_2^3}$$

$$\Delta \tau_{\text{mod}} \cong \frac{L \cdot n_2 \cdot \Delta^2}{4\sqrt{3} \cdot c}$$

$$NA = 0.1 \div 0.2 < 1$$


n_2 - miez

n_1 - teaca


$n_2 > n_1$!!

Dispersia modala

- ▶ Mai mare la fibre multimod cu salt de indice
- ▶ Mai mica la fibre multimod cu indice gradat
 - traseele mai lungi trec prin zone cu indice mai mic
- ▶ Inexistenta la fibrele monomod

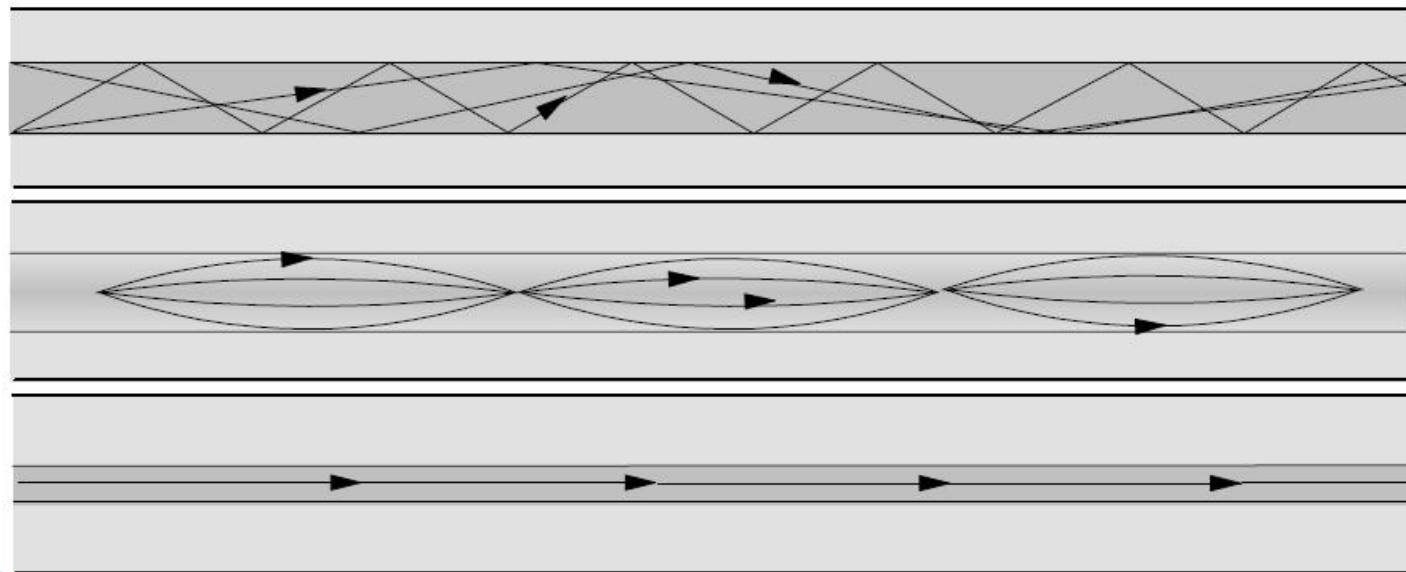


Dispersia de material

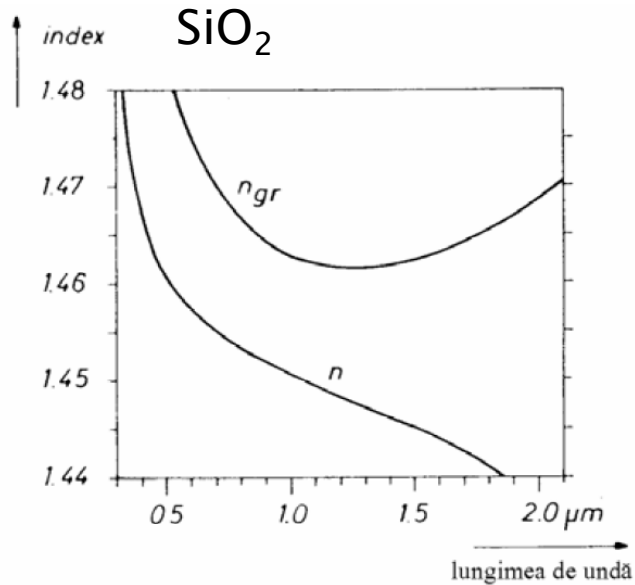

$$n_{gr} = n - \lambda \frac{dn}{d\lambda}$$

$$\Delta\tau_{mat} = \frac{L \cdot \lambda \cdot \Delta\lambda}{c} \cdot \frac{d^2n}{d\lambda^2}$$


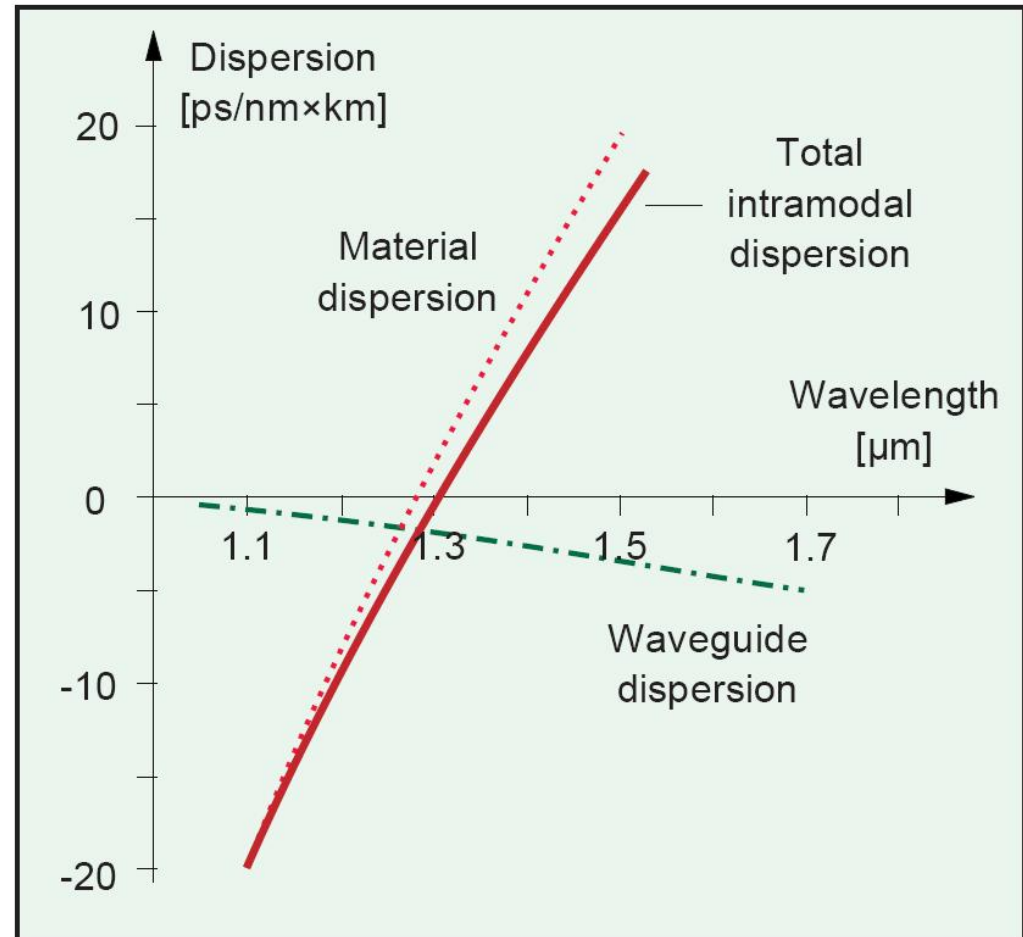


Dispersia de ghid

- ▶ Neglijabila in fibrele multimod fata de dispersia modala


$$\Delta \tau_{gh} = \frac{n \cdot L \cdot \Delta}{c} \cdot \frac{\Delta \lambda}{\lambda} \cdot \left(V \frac{d^2(Vb)}{dV^2} \right)$$

b – constanta de propagare normalizata

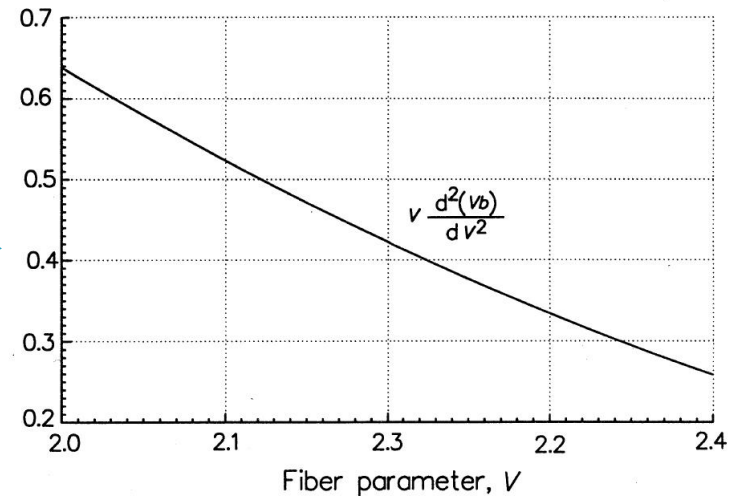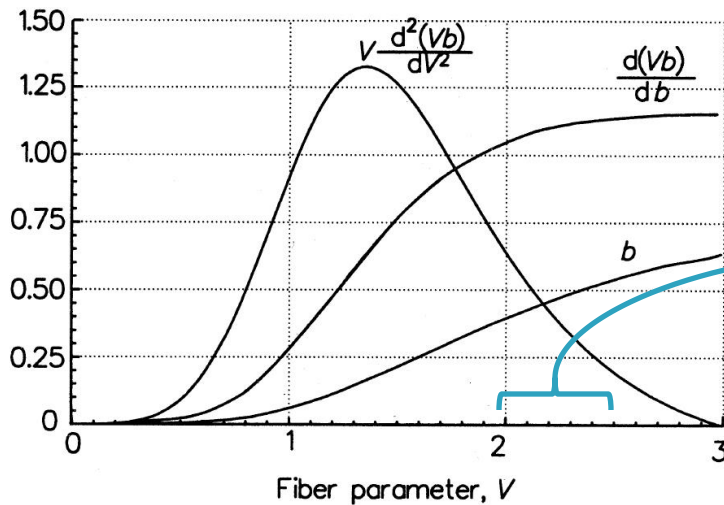

$$V \leq V_C = 2.405$$

Dispersia cromatica (gh+mat)

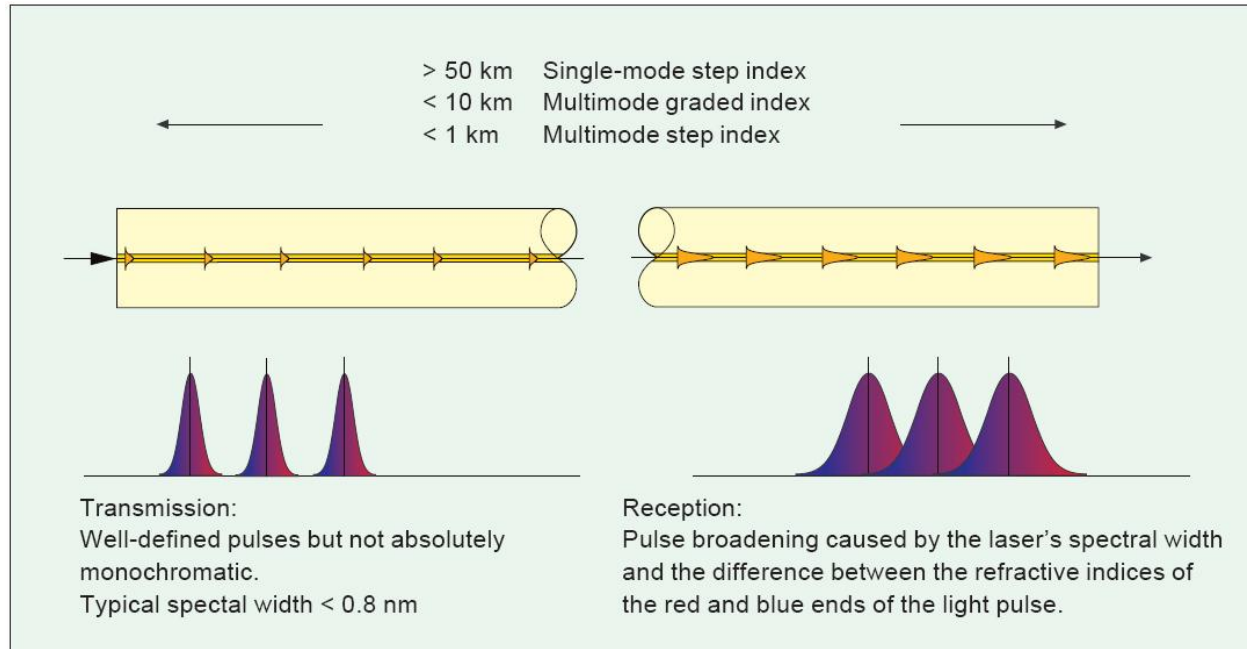

$$\Delta\tau_{cr} = D(\lambda) \cdot \Delta\lambda \cdot L$$

$$D(\lambda) = \frac{S_0}{4} \cdot \left(\lambda - \frac{\lambda_0^4}{\lambda^3} \right)$$


S_0 panta dispersiei -
ps/nm²/km

$$D(\lambda_0) = 0$$

- ▶ $D(\lambda) \approx 100 + 0.4 (850 - \lambda)$ [ps/nm/km]
pentru $800 < \lambda < 900$ nm
- ▶ $D(\lambda) \leq 3,5$ ps/nm/km
pentru $1285 < \lambda < 1330$ nm
- ▶ $D(\lambda) \leq 17$ ps/nm/km
pentru $1525 < \lambda < 1575$ nm


$$D(\lambda) = \frac{S_0}{4} \cdot \left(\lambda - \frac{\lambda_0^4}{\lambda^3} \right)$$

Calitatea spectrală a emițătorilor optici

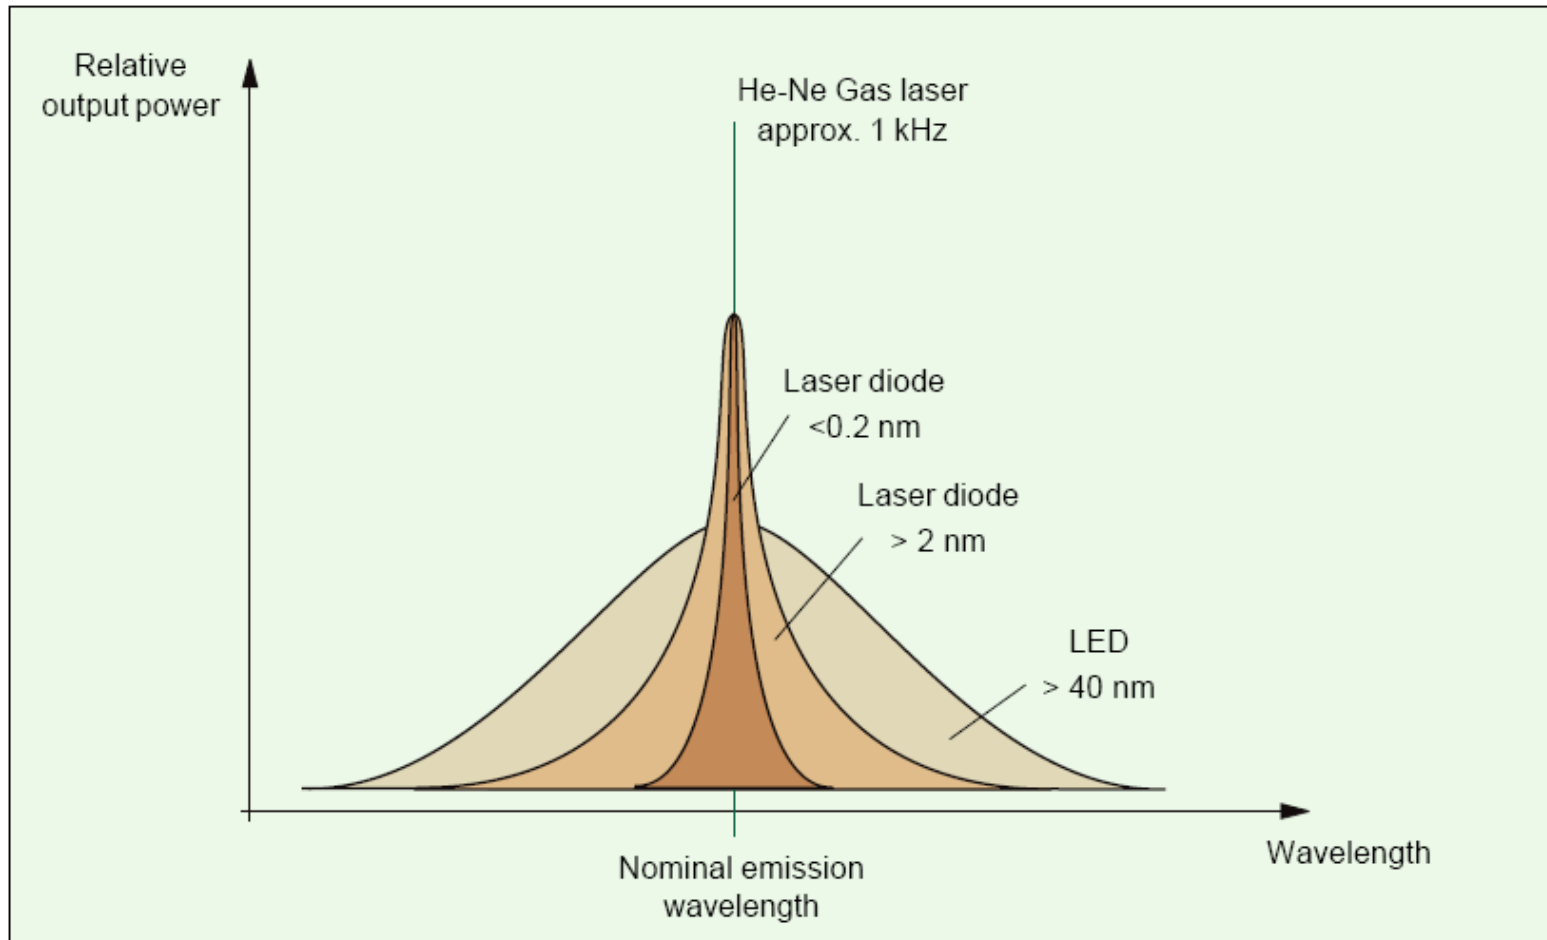


Calitatea spectrală a emițătorilor optici




- ▶ degenerarea nivelelor energetice duce la aparitia benzilor energetice
- ▶ Multitudinea de tranzitii posibile intre cate doua nivele situate in benzi energetice diferite duce la largirea caracteristicii spectrale a surselor

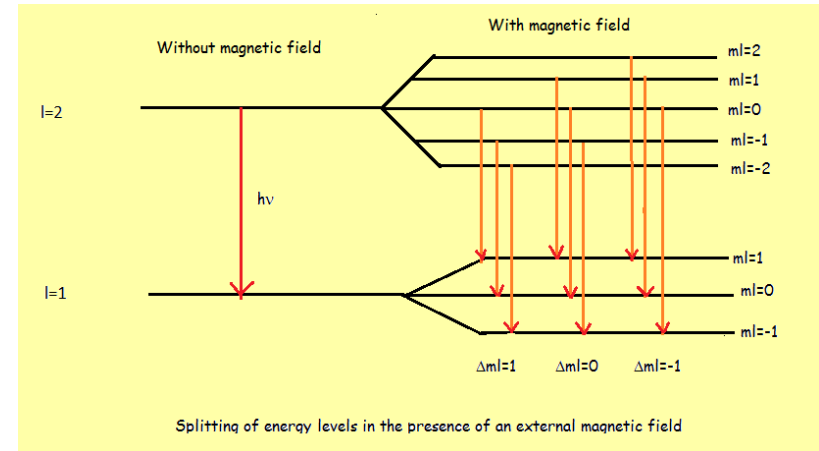

$$\lambda_0 \rightarrow \left[\lambda_0 - \frac{\Delta\lambda}{2}, \lambda_0 + \frac{\Delta\lambda}{2} \right]$$

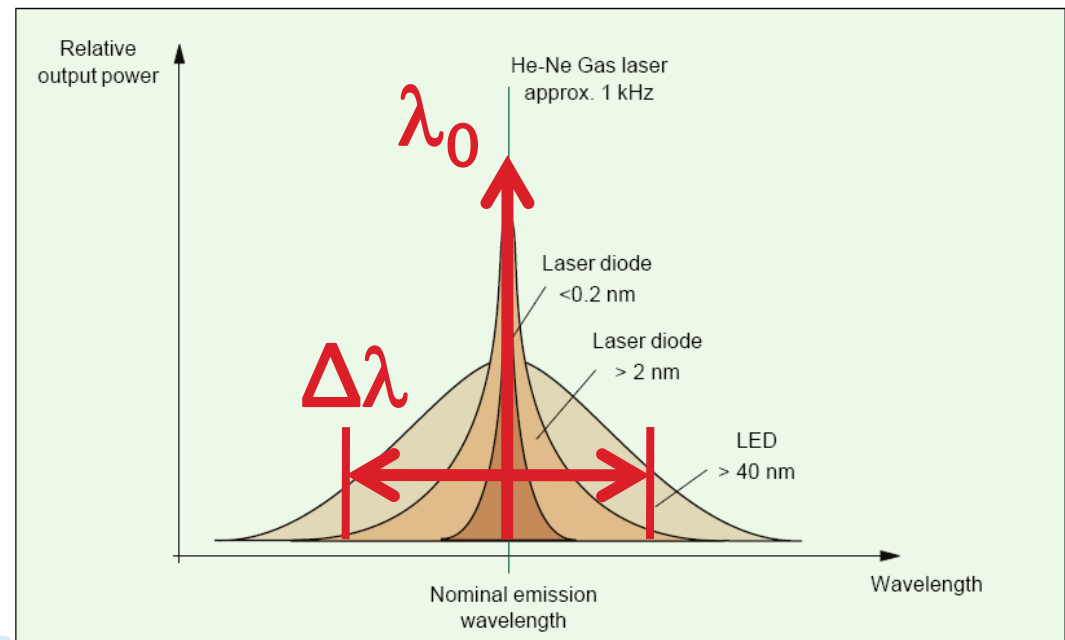


He-Ne Laser

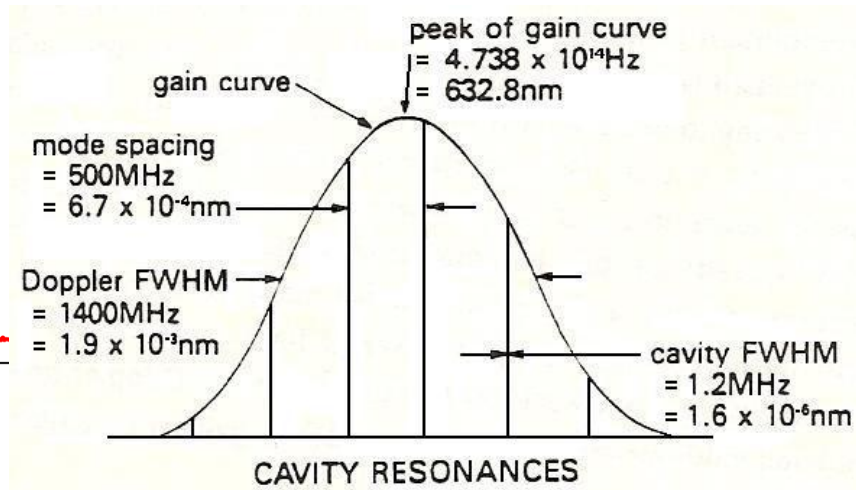
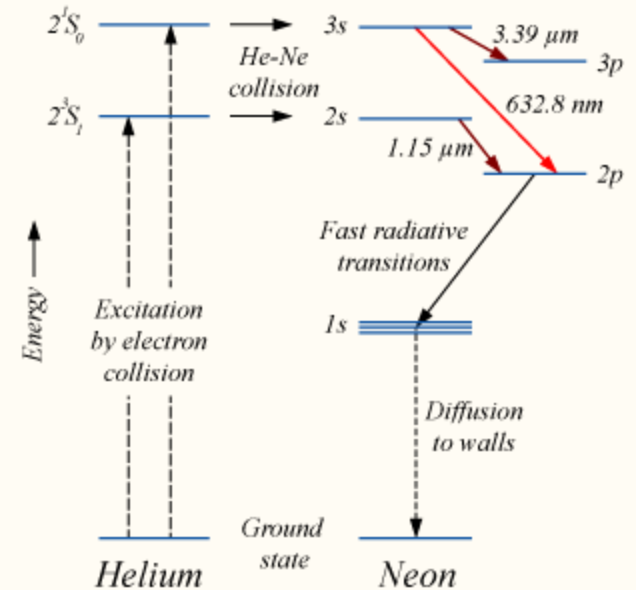
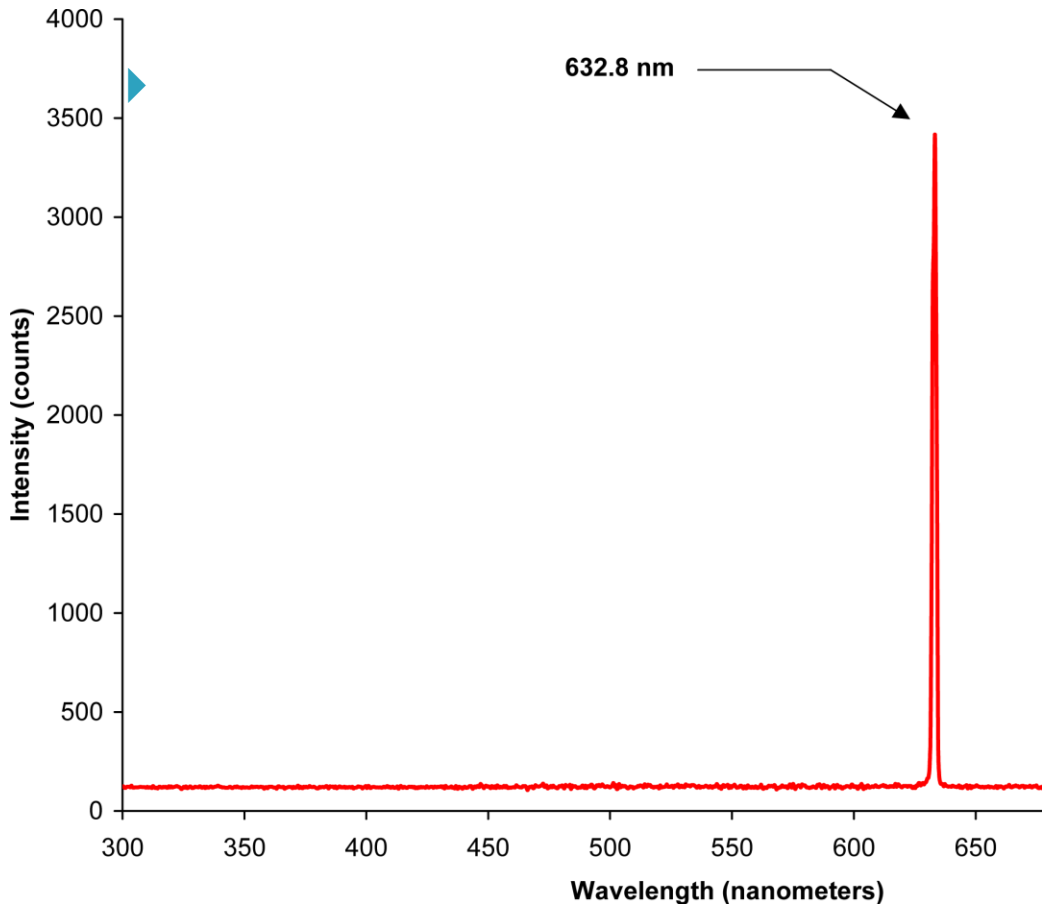


$$\Delta\lambda = 0.002 \text{ nm}$$

Dispersia modala


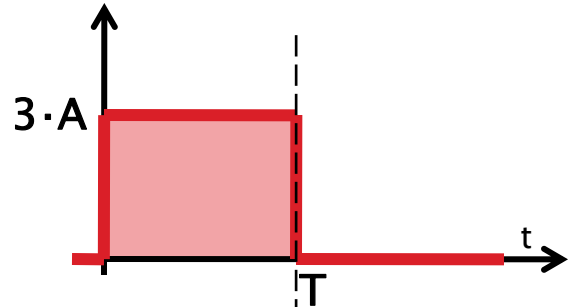


Impartire energie pe moduri

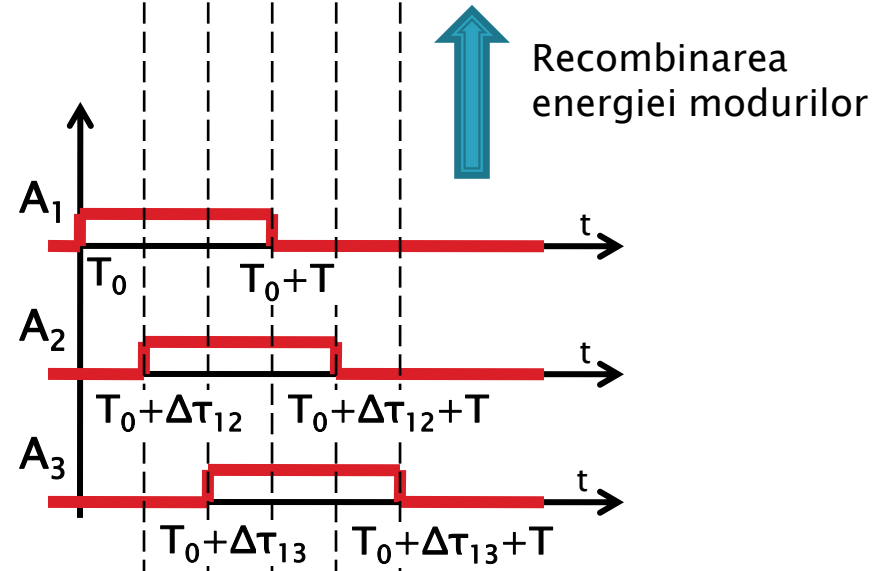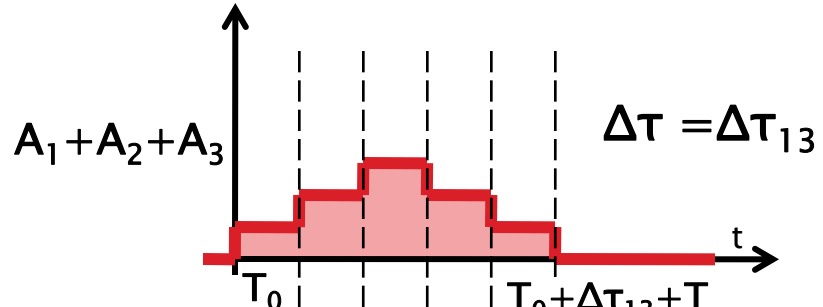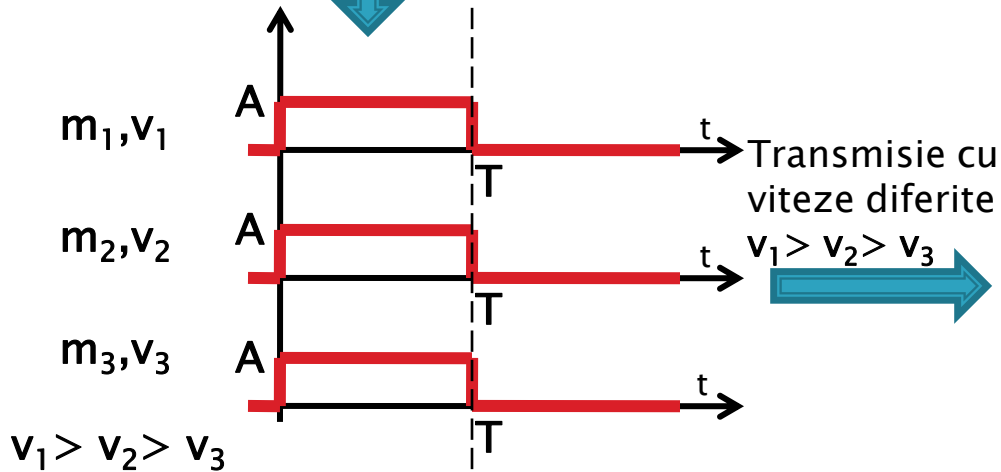


Conceptual $\rightarrow f(t) = \int_{-\infty}^{\infty} g(\omega) \cdot e^{j\omega t} d\omega$


Dispersia cromatica (gh+mat)

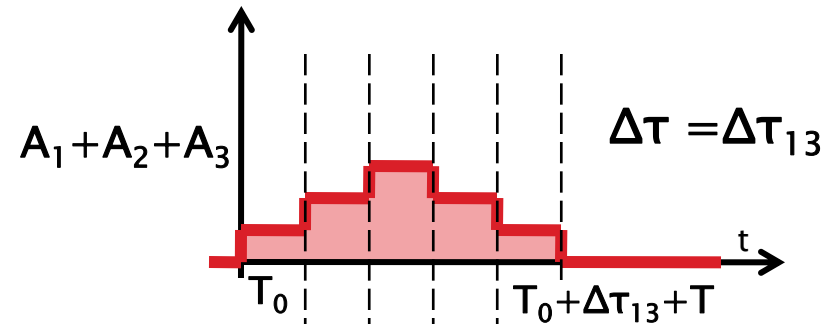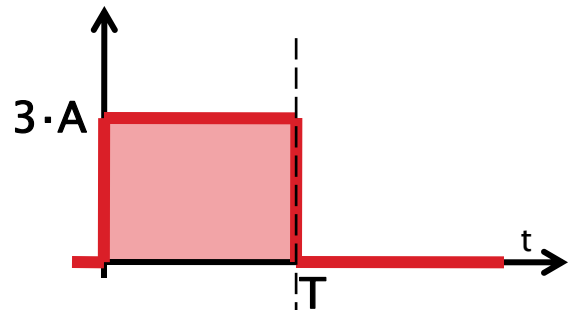

Impartire energie pe lungimi de unda

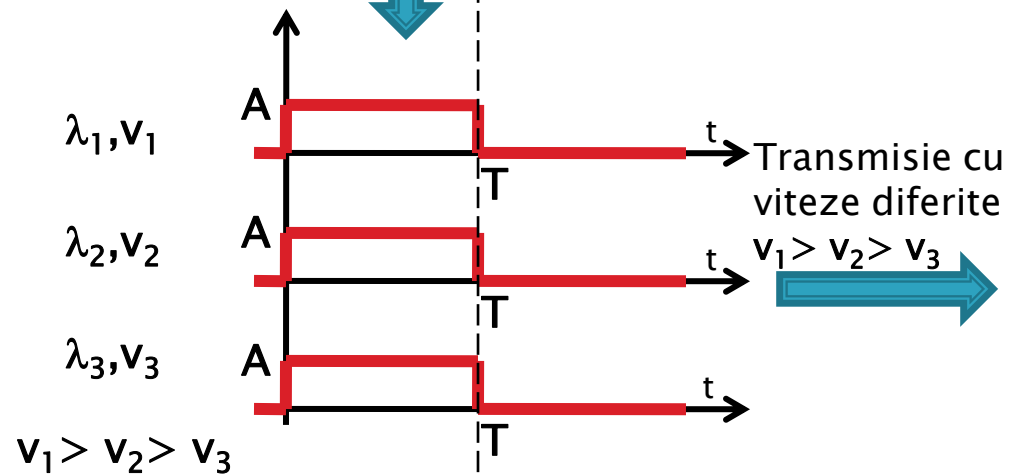

Recombinarea energiei la diferite lungimi de unda

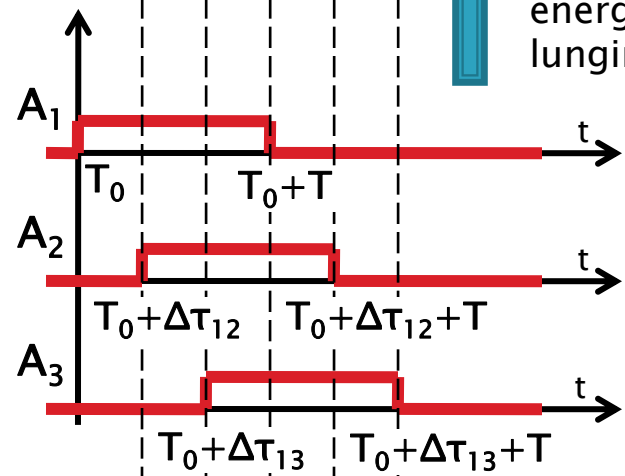


Efectiv $\rightarrow f(t) = \int_{-\infty}^{\infty} g(\omega) \cdot e^{j\omega t} d\omega$

Dispersie exemplu - 1


- ▶ transmisii cu viteze diferite

$$\Delta\tau_{cr} = D(\lambda) \cdot \Delta\lambda \cdot L$$

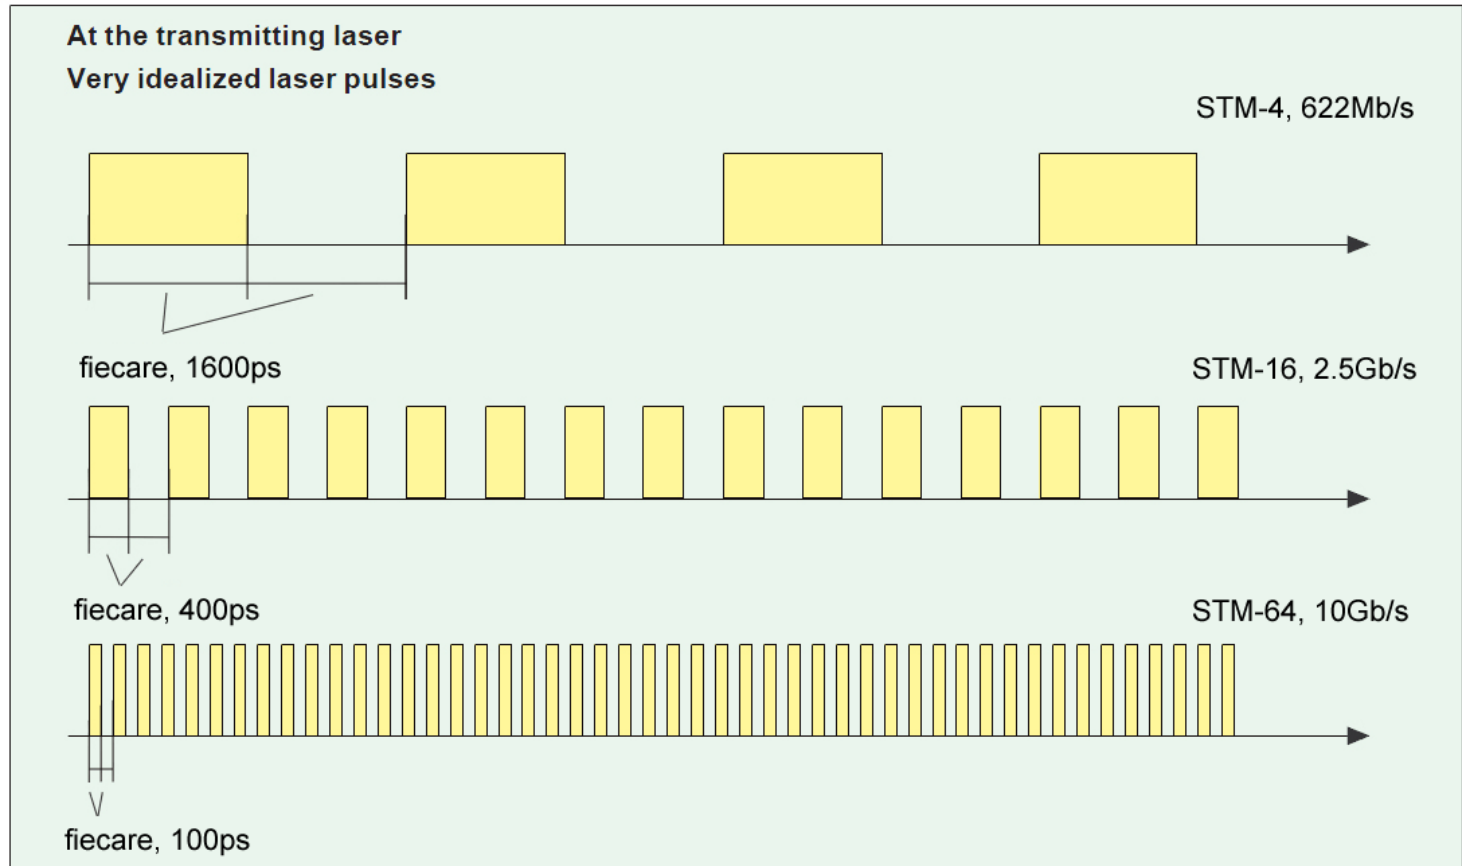

Dispersie exemplu - 2

- ▶ 1550nm
- ▶ Efectul sursei
 - fibra monomod cu dispersia 16ps/nm/km@1550
 - latimea spectrala a sursei $\Delta\lambda=1$ nm
 - 50km

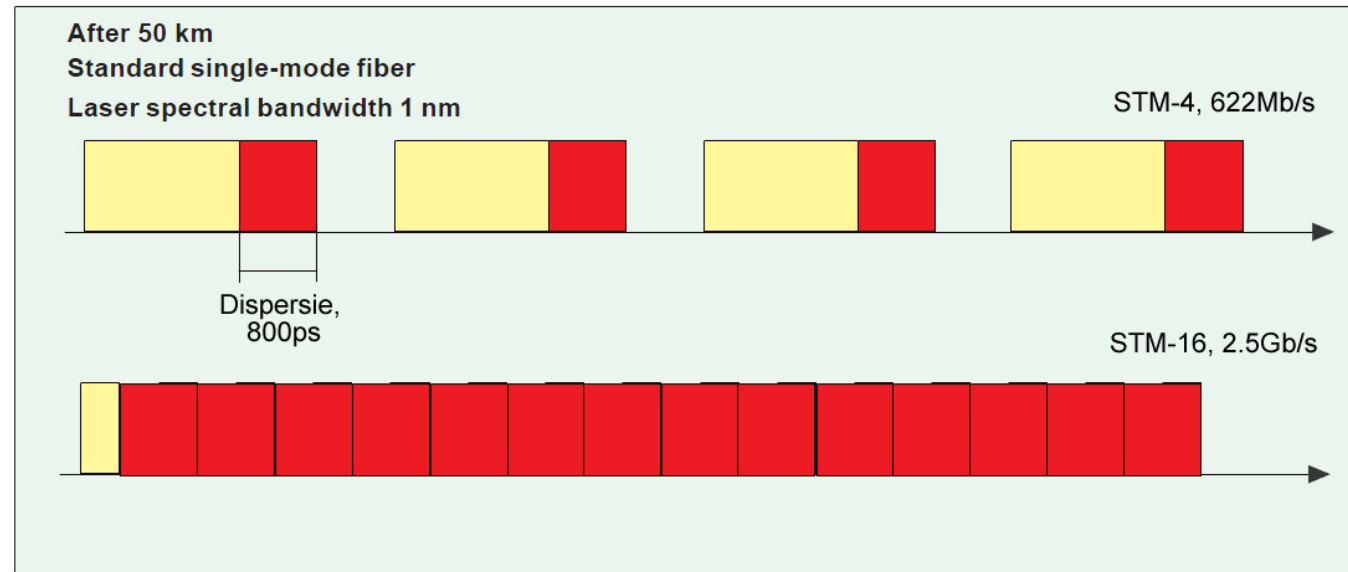

$$\Delta\tau_{cr} = D(\lambda) \cdot \Delta\lambda \cdot L$$

$$\Delta\tau_{cr} = 16 \cdot 1 \cdot 50 \text{ ps} = 800 \text{ ps}$$

$$[\Delta\tau_{cr}] = \frac{\text{ps}}{\text{nm} \cdot \text{km}} \cdot \text{nm} \cdot \text{km} = \text{ps}$$

$$100 < 400 < 800 < 1600$$


Dispersie exemplu – 3

- ▶ 1550nm
- ▶ Efectul sursei
 - fibra monomod cu dispersia 16ps/nm/km@1550
 - latimea spectrala a sursei $\Delta\lambda=0.1\text{ nm}$
 - 50km

$$\Delta\tau_{cr} = D(\lambda) \cdot \Delta\lambda \cdot L$$

$$\Delta\tau_{cr} = 16 \cdot 0.1 \cdot 50 \text{ ps} = 80 \text{ ps}$$

$$[\Delta\tau_{cr}] = \frac{\text{ps}}{\text{nm} \cdot \text{km}} \cdot \text{nm} \cdot \text{km} = \text{ps}$$

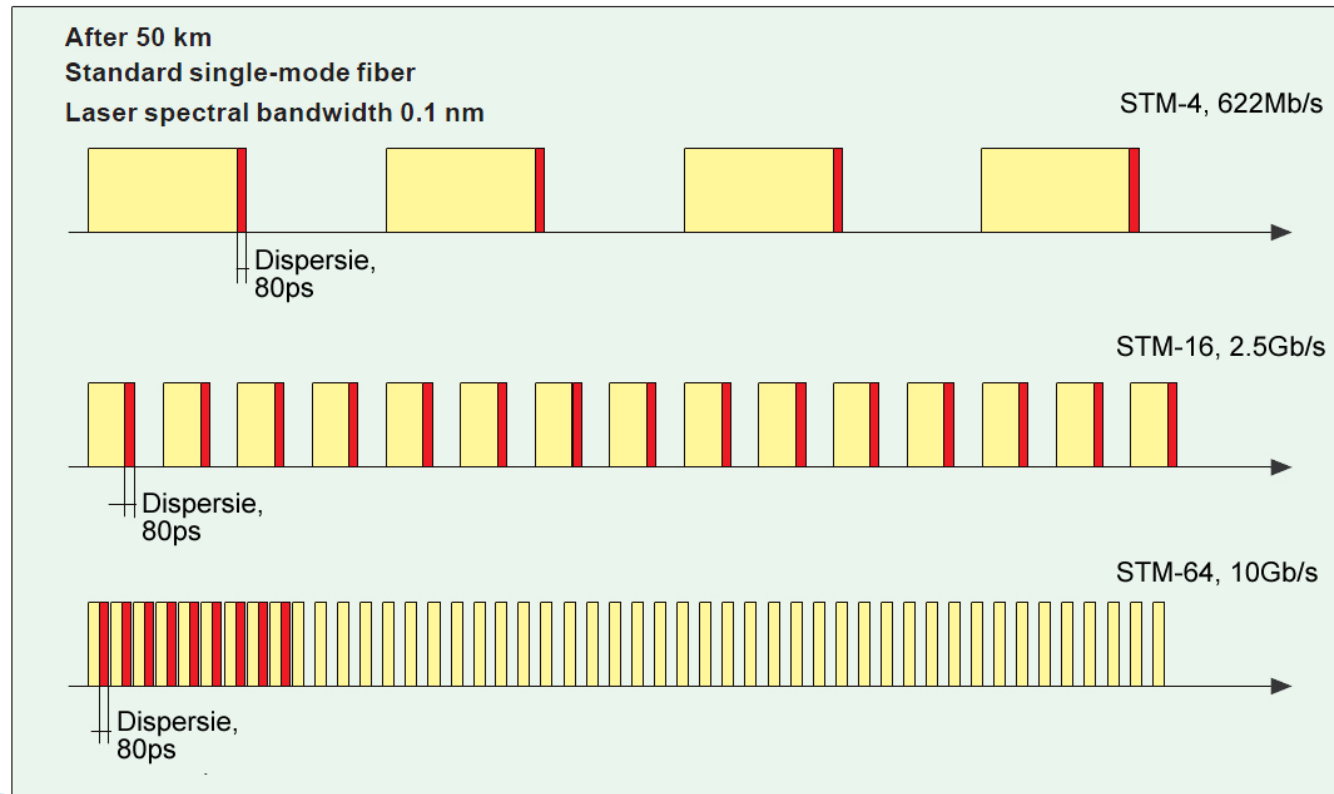

$$100 \approx 80 < 400 < 1600$$

Dispersie exemplu - 4


▶ Efectul fibrei

- fibra cu dispersie deplasata: **4ps/nm/km**@1550
- latimea spectrala a sursei $\Delta\lambda=0.1\text{ nm}$
- 50km

$$\Delta\tau_{cr} = D(\lambda) \cdot \Delta\lambda \cdot L$$

$$\Delta\tau_{cr} = 4 \cdot 0.1 \cdot 50 \text{ ps} = 20 \text{ ps}$$

$$[\Delta\tau_{cr}] = \frac{\text{ps}}{\text{nm} \cdot \text{km}} \cdot \text{nm} \cdot \text{km} = \text{ps}$$

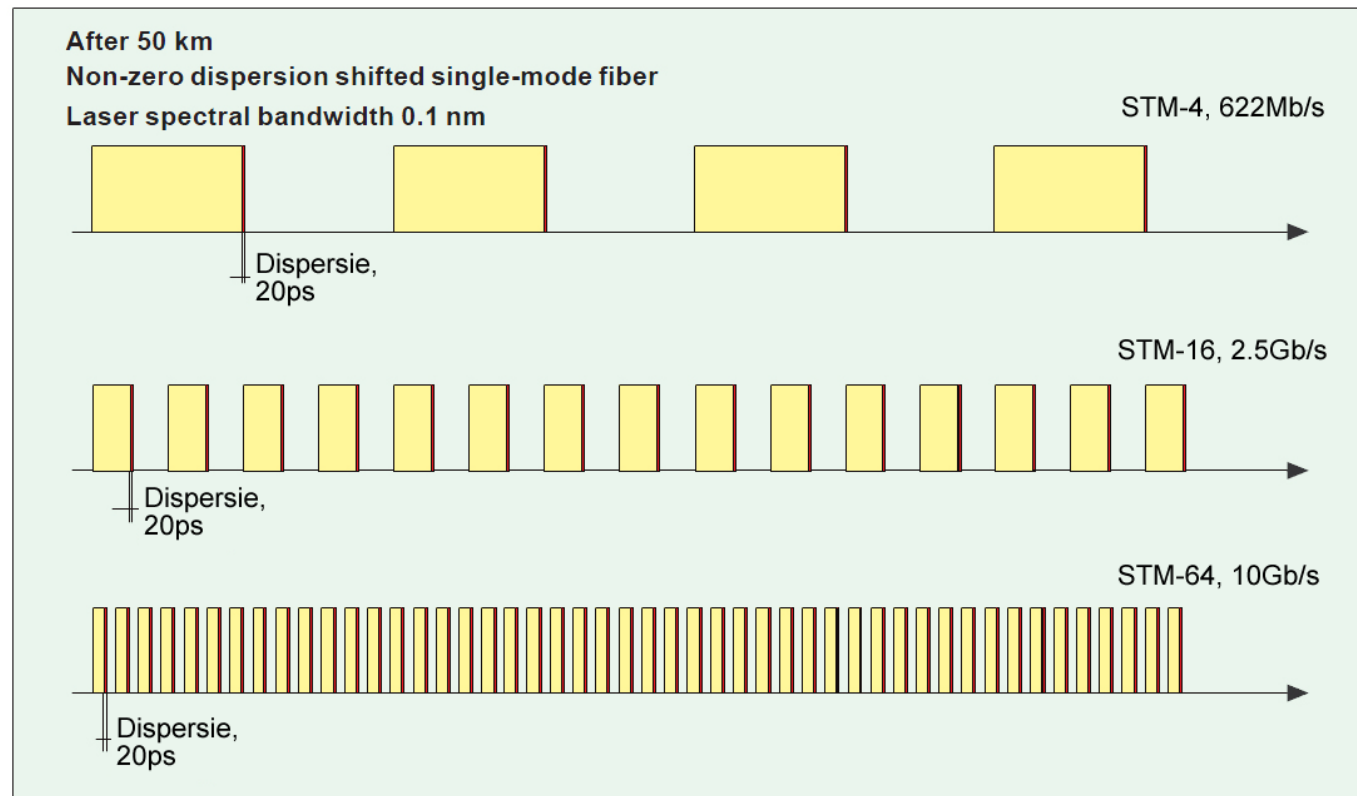

20 < 100 < 400 < 1600

Dispersie exemplu – 5


▶ Efectul fibrei

- fibra cu dispersie deplasata: 4ps/nm/km@1550
- latimea spectrala a sursei $\Delta\lambda=0.1\text{ nm}$
- **150km**

$$\Delta\tau_{cr} = D(\lambda) \cdot \Delta\lambda \cdot L$$

$$\Delta\tau_{cr} = 4 \cdot 0.1 \cdot 150 \text{ ps} = 60 \text{ ps}$$


$$[\Delta\tau_{cr}] = \frac{\text{ps}}{\text{nm} \cdot \text{km}} \cdot \text{nm} \cdot \text{km} = \text{ps}$$

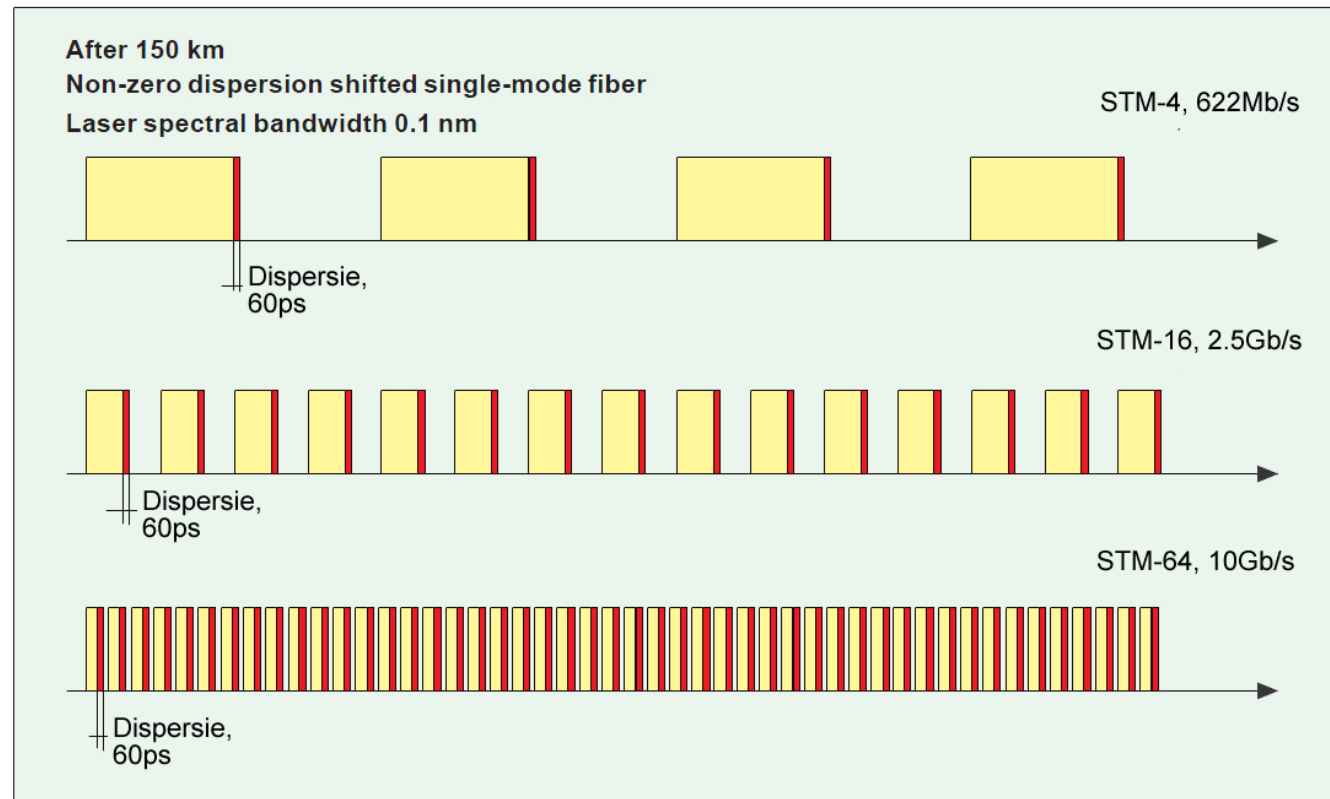

60 < 100 < 400 < 1600


Sumarea efectelor

- ▶ efecte **succesive** se adună liniar

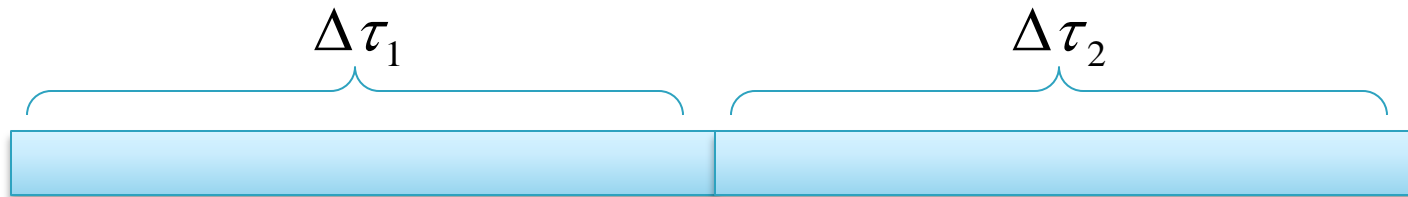

$$\Delta\tau_{tot} = \Delta\tau_1 + \Delta\tau_2$$

- ▶ efecte **simultane** se adună pătratic

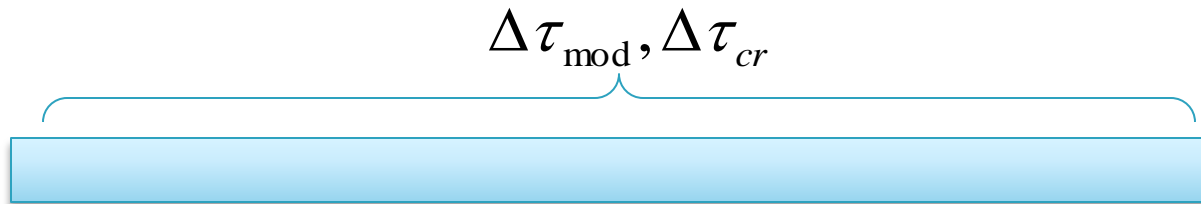

$$\Delta\tau_{tot} = \sqrt{\Delta\tau_{cr}^2 + \Delta\tau_{mod}^2}$$

Dispersia

▶ Dispersia modala

▶ salt de indice

$$\Delta\tau_{\text{mod}} \cong \frac{L \cdot n_2 \cdot \Delta}{2\sqrt{3} \cdot c} \approx \frac{L \cdot NA^2}{4\sqrt{3} \cdot c \cdot n_2}$$

▶ indice gradat

$$\Delta\tau_{\text{mod}} \cong \frac{L \cdot n_2 \cdot \Delta^2}{4\sqrt{3} \cdot c} \cong \frac{L \cdot NA^4}{16\sqrt{3} \cdot c \cdot n_2^3}$$



$$\Delta = 0.01 \div 0.02 \ll 1$$

$$NA = 0.1 \div 0.2 < 1$$

▶ Dispersia cromatica

$$\Delta\tau_{cr} = D(\lambda) \cdot \Delta\lambda \cdot L$$

$$D(\lambda) = \frac{S_0}{4} \cdot \left(\lambda - \frac{\lambda_0^4}{\lambda^3} \right)$$

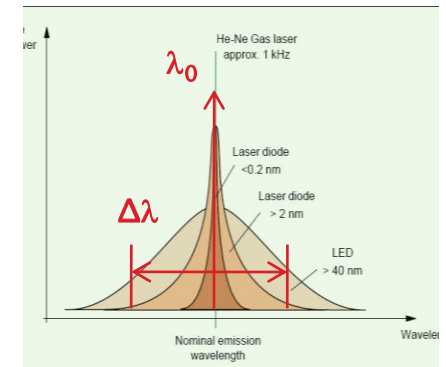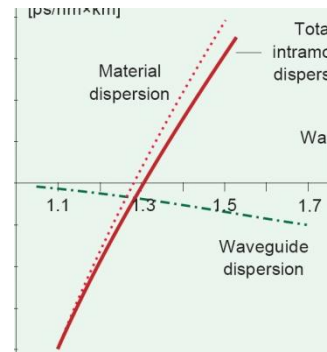

$$\Delta\tau_{tot} = \sqrt{\Delta\tau_{cr}^2 + \Delta\tau_{mod}^2}$$

Banda

- ▶ Dispersia totala

$$\Delta\tau_{tot} = \sqrt{\Delta\tau_{cr}^2 + \Delta\tau_{mod}^2} \quad \text{sau} \quad \Delta\tau_{tot} = \Delta\tau_1 + \Delta\tau_2$$

- ▶ Banda

$$B_{opt} \cong \frac{0.44}{\Delta\tau_{tot} [ns]} [GHz]$$

- ▶ Banda optica la 3 dB corespunde unei benzi electrice la 6 dB

- $P_{opt} \sim I; \quad P_{el} \sim I^2$

$$B_{opt} = \sqrt{2}B_{el}$$

- ▶ Viteza legaturii

$$V [Gb/s] \cong 2 \cdot B_{el} [GHz]$$

Produs Banda · Distanta

$$\Delta\tau_{\text{mod}} \cong \frac{L \cdot n_2 \cdot \Delta}{2\sqrt{3} \cdot c} \approx \frac{L \cdot NA^2}{4\sqrt{3} \cdot c \cdot n_2}$$

$$\Delta\tau_{\text{tot}} = \sqrt{\Delta\tau_{\text{cr}}^2 + \Delta\tau_{\text{mod}}^2}$$

$$\Delta\tau_{\text{cr}} = D(\lambda) \cdot \Delta\lambda \cdot L$$

$$\Delta\tau_{\text{tot}} = \text{const} \cdot L$$

$$B_{\text{opt}} = \frac{0.44}{\Delta\tau_{\text{tot}} [\text{ns}]} \quad [\text{GHz}]$$

$$B_{\text{opt}} = \sqrt{2} B_{\text{el}}$$

$$V [\text{Gb/s}] \cong 2 \cdot B_{\text{el}}$$

$$V [\text{Gb/s}] \cong \frac{\text{const}}{L}$$

$$V [\text{Gb/s}] \cdot L [\text{km}] \cong \text{const}$$

Produs Banda X Distanta

$$\Delta\tau_{\text{mod}} \sim L$$

$$\Delta\tau_{\text{cr}} \sim L$$

$$\Delta\tau_{\text{tot}} \sim L$$



$$V[\text{Gb/s}] \sim B_{\text{el}}[\text{GHz}] \sim \frac{1}{\Delta\tau_{\text{tot}}} \sim \frac{1}{L[\text{km}]}$$

$$V[\text{Gb/s}] \times L[\text{km}] = \text{ct.}$$


$$B_{\text{el}}[\text{MHz}] \times L[\text{km}] = \text{ct.}$$

Dispersion shifted fibers



- ▶ Sticla are (nativ) dispersie cromatica 0 la 1310nm
- ▶ Atenuarea e mai mica la 1550 nm
- ▶ EDFA (Erbium doped fibre amplifiers) opereaza in banda 1550nm
- ▶ Sistemele WDM (Wavelength division Multiplexing) necesita banda larga amplificata

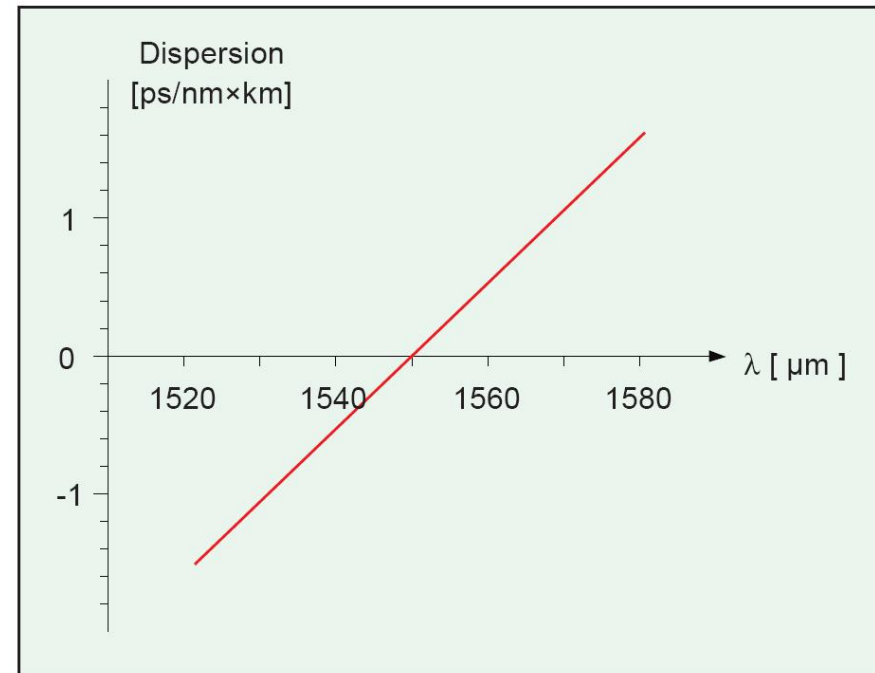



Non-zero Dispersion shifted fibers




FWM

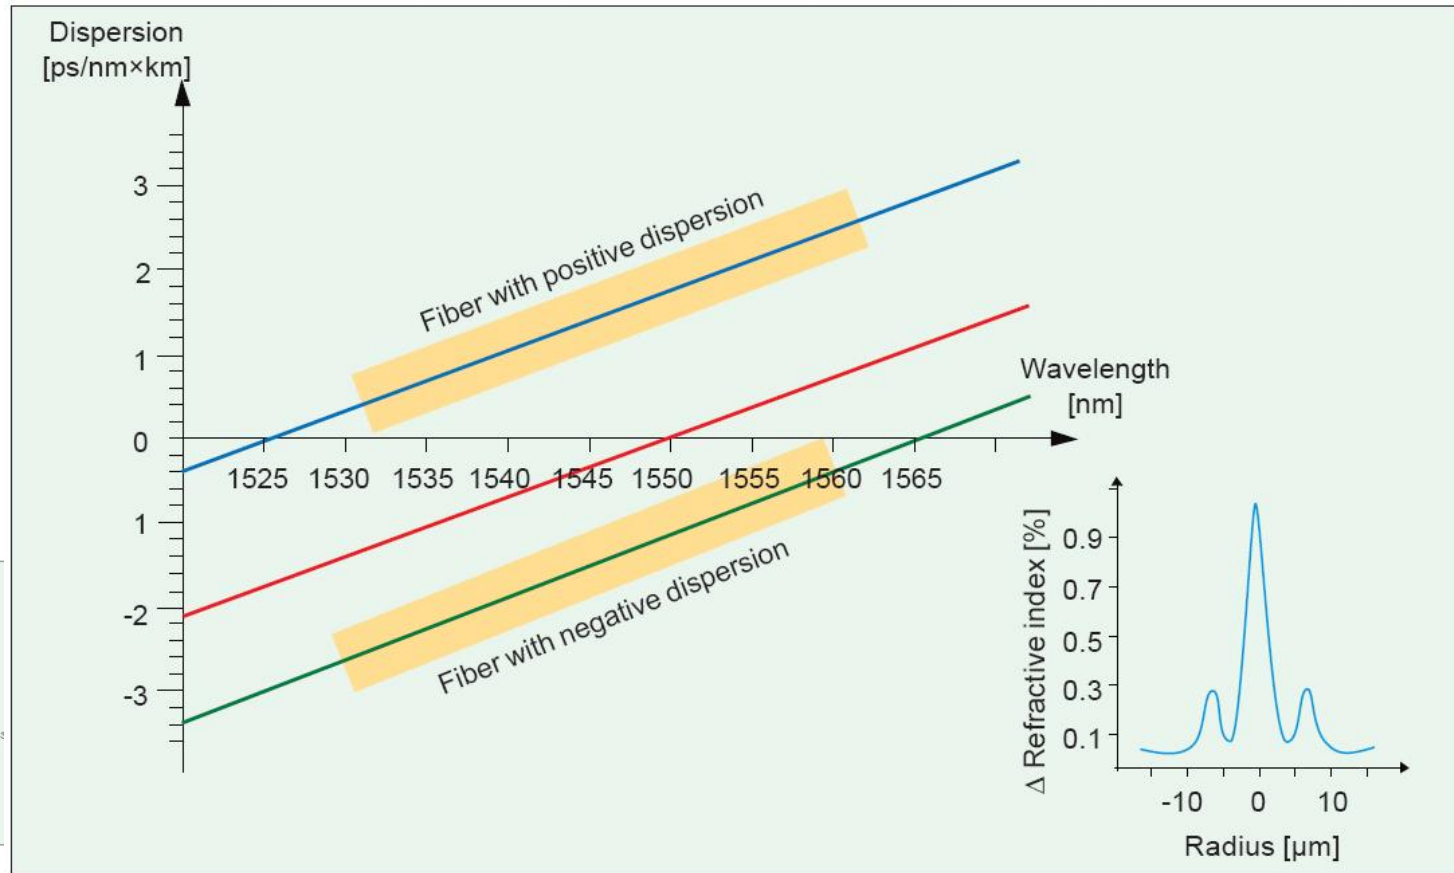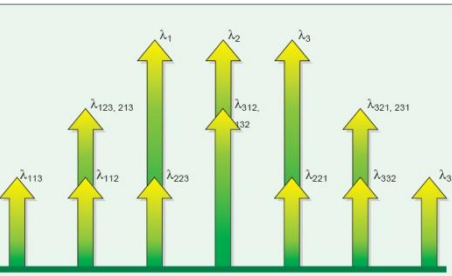

Dispersion shifted fibers

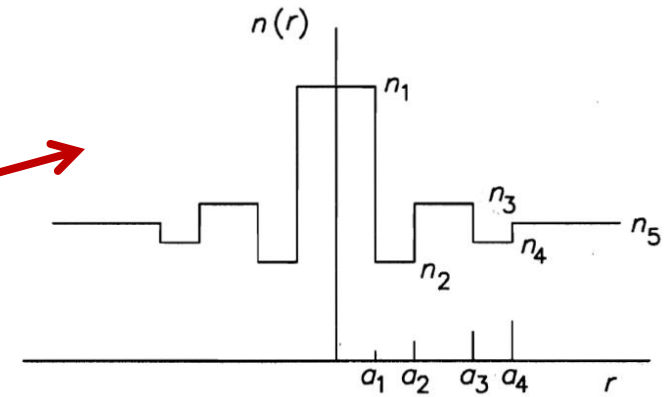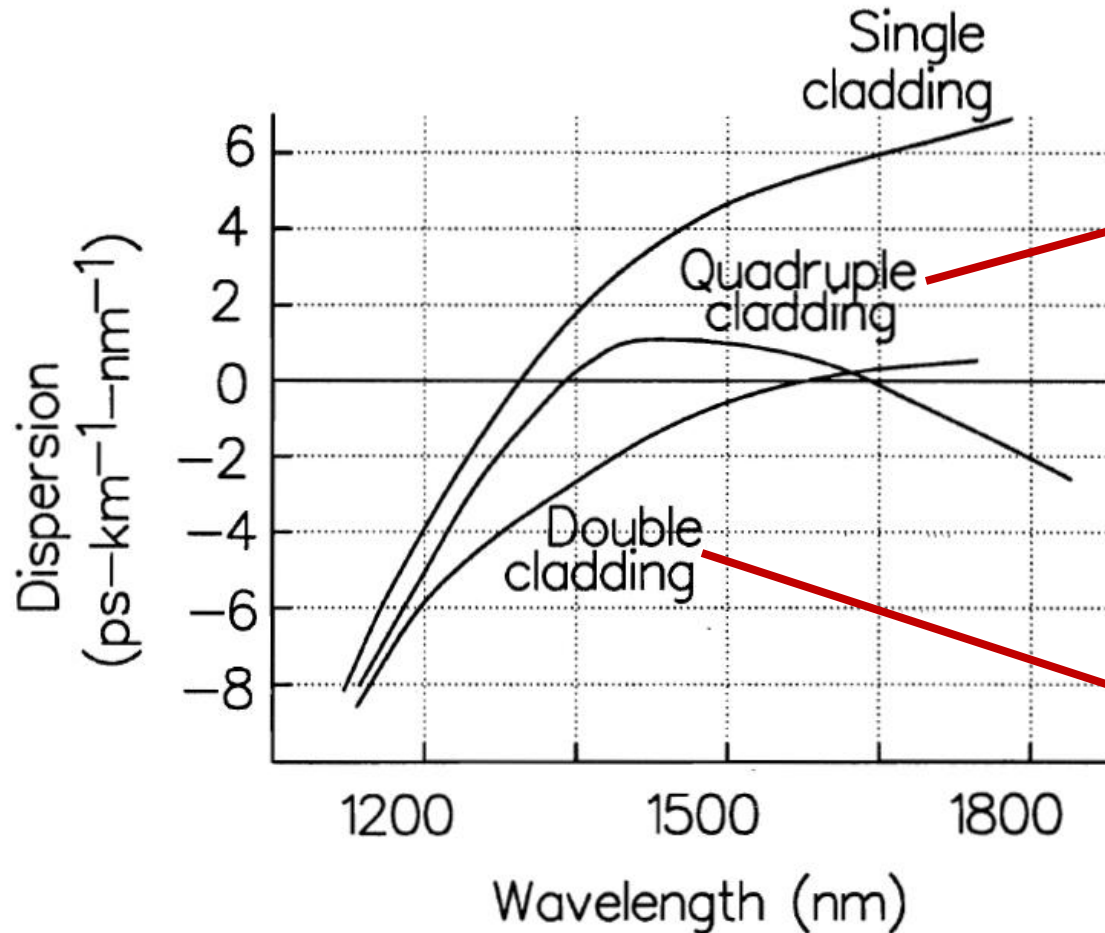


(b)

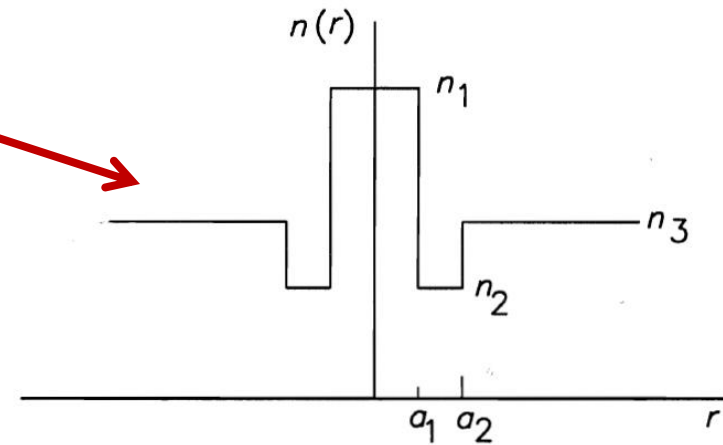

(a)

Fibra pentru compensarea dispersiei

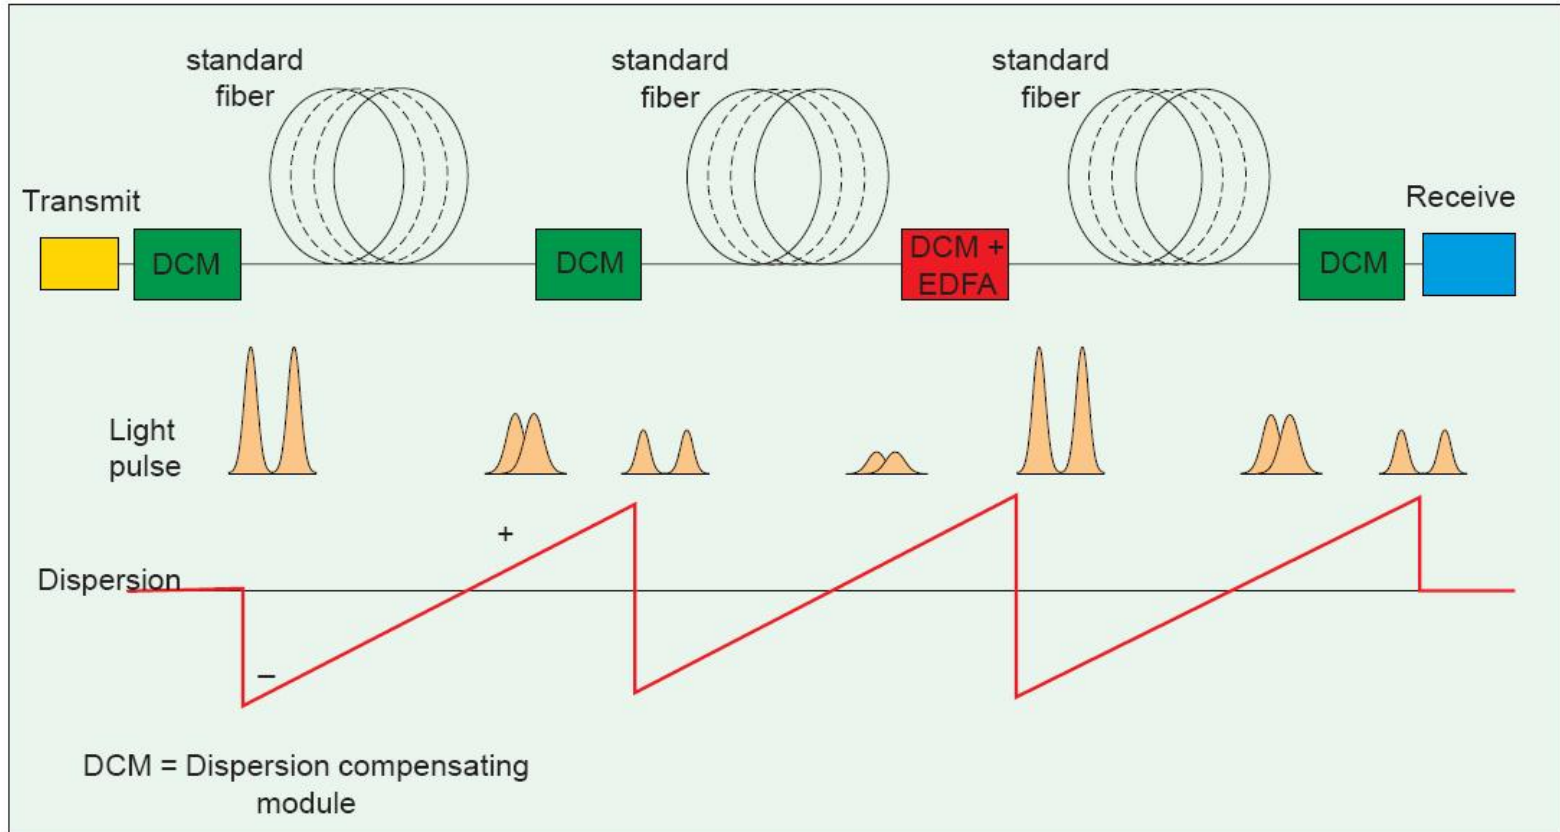

- ▶ Dispersie: -100 ps/nm/km
- ▶ Atenuare 0.5 dB/km

Catalog – monomod

$$D(\lambda) = \frac{S_0}{4} \cdot \left(\lambda - \frac{\lambda_0^4}{\lambda^3} \right)$$

How to Order

Contact your sales representative, or call the Optical Fiber Customer Service Department.
 Ph: 607-248-2000 (U.S. and Canada)
 +44-1244-287-437 (Europe)
 Email: opticalfibres@corning.com
 Please specify the fiber type, attenuation and quantity when ordering.

Mechanical Specifications

Proof Test

The entire fiber length is subjected to a tensile stress ≈ 100 kpsi (0.7 GPa)*.
 *Higher proof test levels available.

Length

Fiber lengths available up to 50.4* km/spool.
 *Longer optical lengths available.

Performance Characterizations

Characterized parameters are typical values.

Core Diameter	8.2 μ m
Numerical Aperture	0.14 <i>NA is measured as the one percent power level of a one-dimensional intensity profile at 1310 nm.</i>
Zero Dispersion Wavelength (λ_0)	1317 nm
Zero Dispersion Slope (S_0)	0.088 ps/(nm ² ·km)
Effective Group Index at 1310 nm (N_e)	1.4670
Effective Group Index at 1550 nm (N_e)	1.4670
Fatigue Resistance Parameter (N_f)	20
Coating Strip Force	Dry: 0.6 lbs. (3N) Wet, 14-day room temperature: 0.6 lbs. (3N)
Rayleigh Backscatter Coefficient (for 1x Pulse Width)	1310 nm: -77 dB 1550 nm: -82 dB
Stimulated Brillouin Scattering Threshold	20 dBm ⁰

Notes:
 (1) When characterized with a transmitter specifying 17 dBm SBS threshold over standard single-mode fiber. While absolute SBS threshold is a function of distance and signal format, NextGen fiber offers a 3 dB improvement over standard single-mode fiber independent of these variables.

Formulas

Dispersion

$$\text{Dispersion} = D(\lambda) = -\frac{S_0}{4} \left[\lambda - \frac{\lambda_0^4}{\lambda^3} \right] \text{ ps/(nm}^2\text{·km)}$$

for 1200 nm \leq λ \leq 1625 nm
 λ = Operating Wavelength

Cladding Non-Circularity

$$\text{Non-Circularity} = \left[\frac{\text{Min. Cladding Diameter}}{\text{Max. Cladding Diameter}} \right] \times 100$$

Corning Incorporated
 www.corning.com/opticalfiber
 One Riverfront Plaza
 Corning, NY 14831
 U.S.A.
 Ph: 800-525-2724 (U.S. and Canada)
 607-786-8125 (International)
 Fax: 800-539-3632 (U.S. and Canada)
 607-786-8344 (International)
 Email: corning@corning.com

Europe
 Ph: 00 800 6620 6621 (U.K., Ireland, France, Germany, The Netherlands, Spain and Sweden)
 +1 607 525 2724 (All Other Countries)
 Fax: 00 49 786 8344

Asia Pacific
 Australia
 Ph: 1-800-148-690
 Fax: 1-800-148-568

Indonesia
 Ph: 001-800-015-721-1261
 Fax: 001-800-015-721-1262

Malaysia
 Ph: 1-800-80-3156
 Fax: 1-800-80-3155

Philippines
 Ph: 1-800-1-116-0338
 Fax: 1-800-1-116-0339

Singapore
 Ph: 800-1300-955
 Fax: 800-1300-956

Thailand
 Ph: 001-800-1-1-721-1261
 Fax: 001-800-1-1-721-1264

Latin America
 Brazil
 Ph: 000817-762-4732
 Fax: 000817-762-4996

Mexico
 Ph: 001-800-235-1719
 Fax: 001-800-339-1472

Venezuela
 Ph: 800-1-4418
 Fax: 800-1-4419

Greater China
 Email: CCCofic@corning.com

Beijing
 Ph: (86) 10-6305-5066
 Fax: (86) 10-6305-5077

Hong Kong
 Ph: (852) 2807-2723
 Fax: (852) 2807-2152

Shanghai
 Ph: (86) 21-3222-4608
 Fax: (86) 21-6288-1575


Taiwan
 Ph: (886) 2-2716-0338
 Fax: (886) 2-2716-0339

NextGen is a trademark, and Corning and SMF-28 are registered trademarks of Corning Incorporated, Corning, N.Y.

Any warranty of any nature relating to any Corning optical fiber is only contained in the written agreement between Corning Incorporated and the direct purchaser of such fiber.
 ©2005, Corning Incorporated

jar-jveia scan at 1510 nm

Zero Dispersion Wavelength (λ_0)	1317 nm
Zero Dispersion Slope (S_0)	0.088 ps/(nm ² ·km)
Effective Group Index at 1310 nm	1.4670

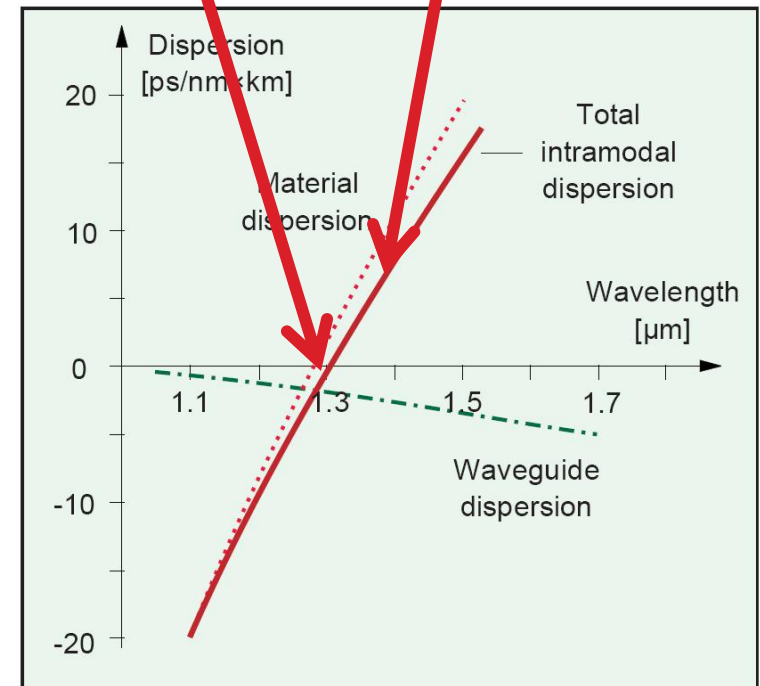

Catalog – multimod

Bandwidth

$$D(\lambda) = \frac{S_0}{4} \cdot \left(\lambda - \frac{\lambda_0^4}{\lambda^3} \right)$$

+

Standard Bandwidth Cells	
850/1300 nm (MHz•km)	
	400/400
	400/600
	400/1200
	500/500
	600/600
	600/1000

Other bandwidth cells available upon request.


Fibra standard ITU G.652

- ▶ Diametru teaca = 125 μm
- ▶ MFD = 9÷10 μm la 1300 nm
- ▶ $\lambda_C = 1100\div 1280$ nm
- ▶ Pierderi de curbura (la 1550 nm) mai mici de 1 dB pentru 100 spire de fibra rulata pe un mosor cu 7.5 cm diametru
- ▶ Dispersia in banda 1300 nm (1285–1330 nm) mai mica de 3.5 ps/nm/km. La 1550 nm dispersia trebuie sa fie mai mica de 20 ps/nm/km
- ▶ Viteza de variatie a dispersiei (panta dispersiei S_0) mai mica de 0.095 ps/nm²/km

ITU (International Telecommunication Union) is the United Nations specialized agency for information and communication technologies - ICTs

Fibra optica din plastic (POF)

Attenuation dB/Km

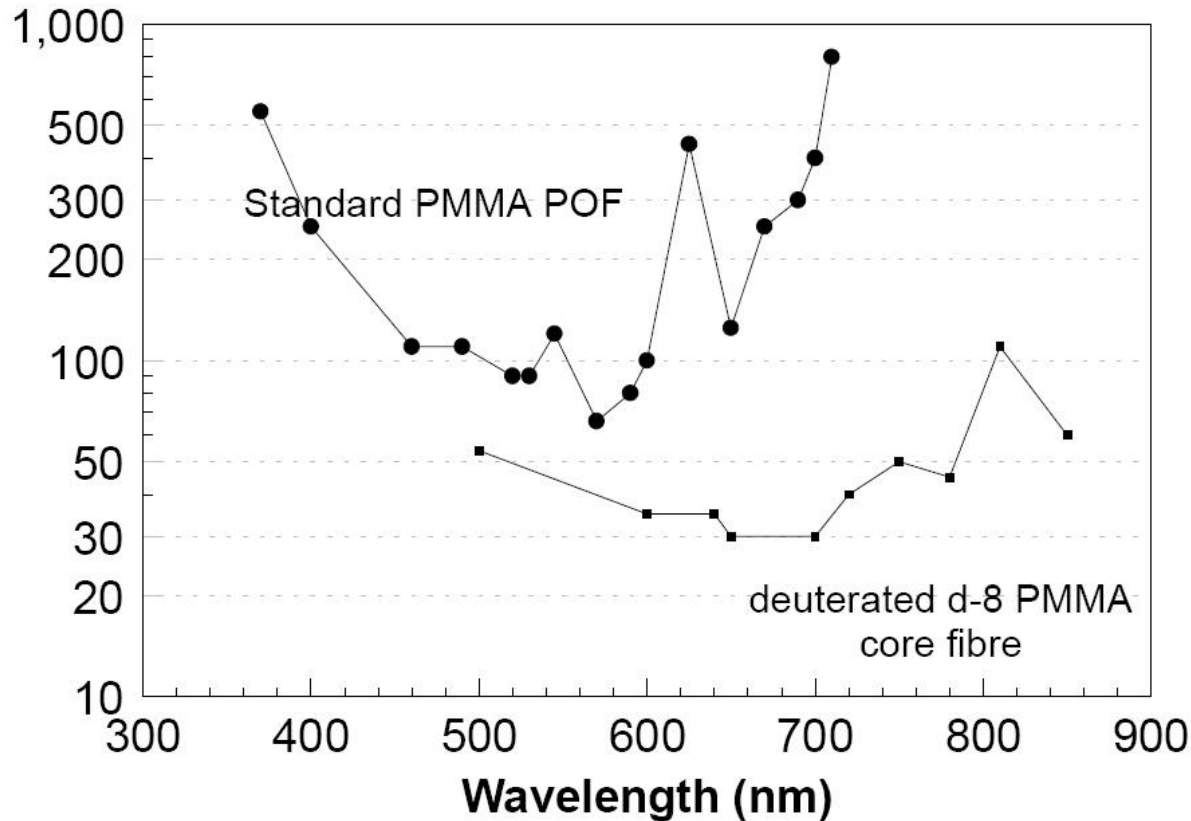



- ▶ Atenuare 180 dB/km
- ▶ $NA = 0.3$
- ▶ Diametru 1 mm
- ▶ Banda 125MHz (100m)

Fibra optică – Tehnologie

Capitolul 5


OTDR

- ▶ Optical Time-Domain Reflectometer
- ▶ Localizarea defectelor

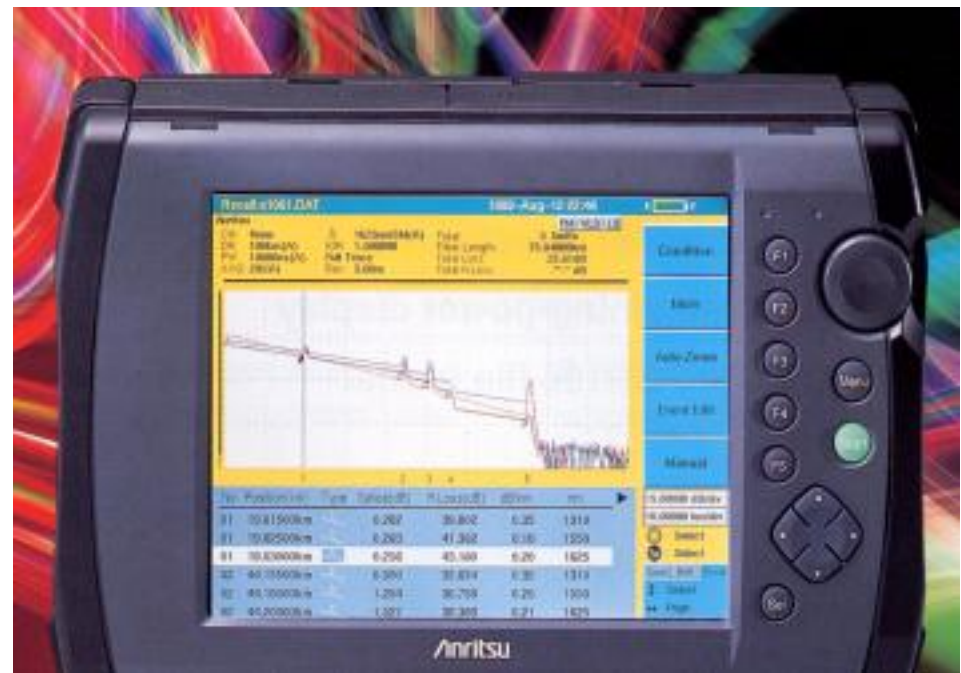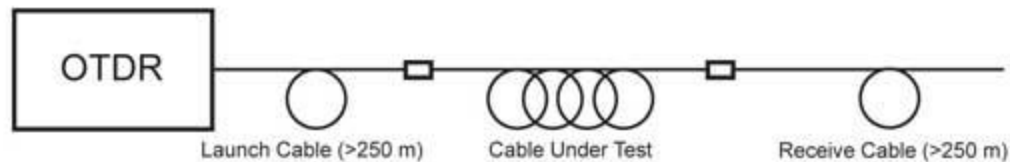


OTDR


- ▶ Optical time-domain reflectometer
- ▶ Localizarea defectelor

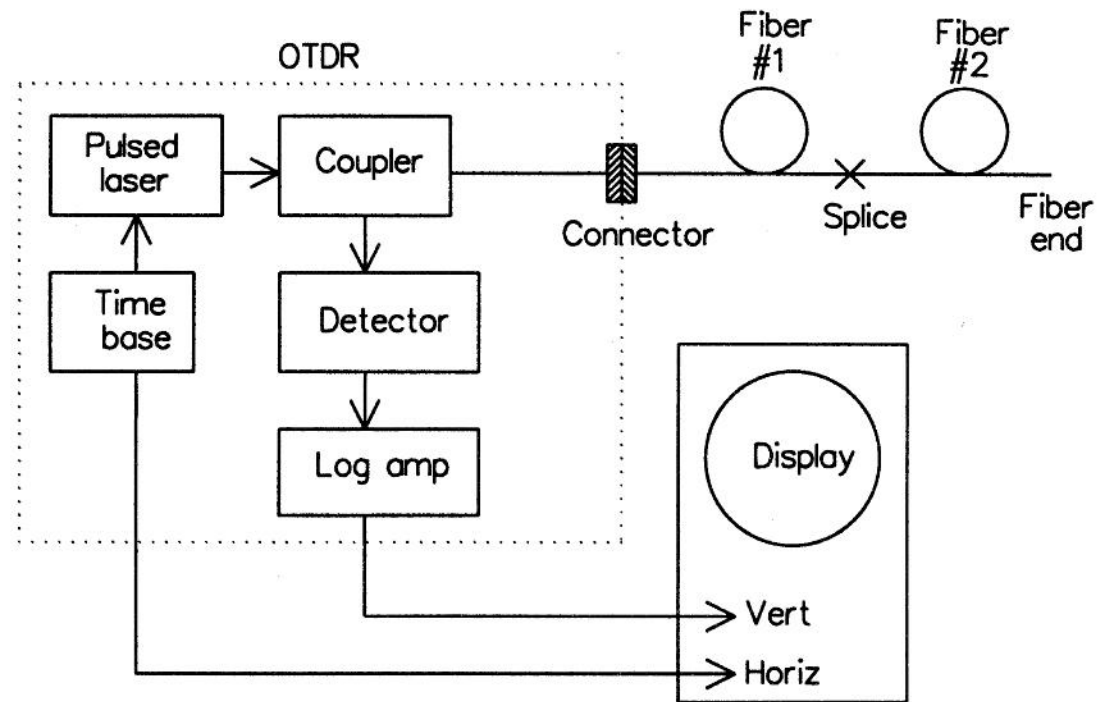

Rezultat grafic al OTDR

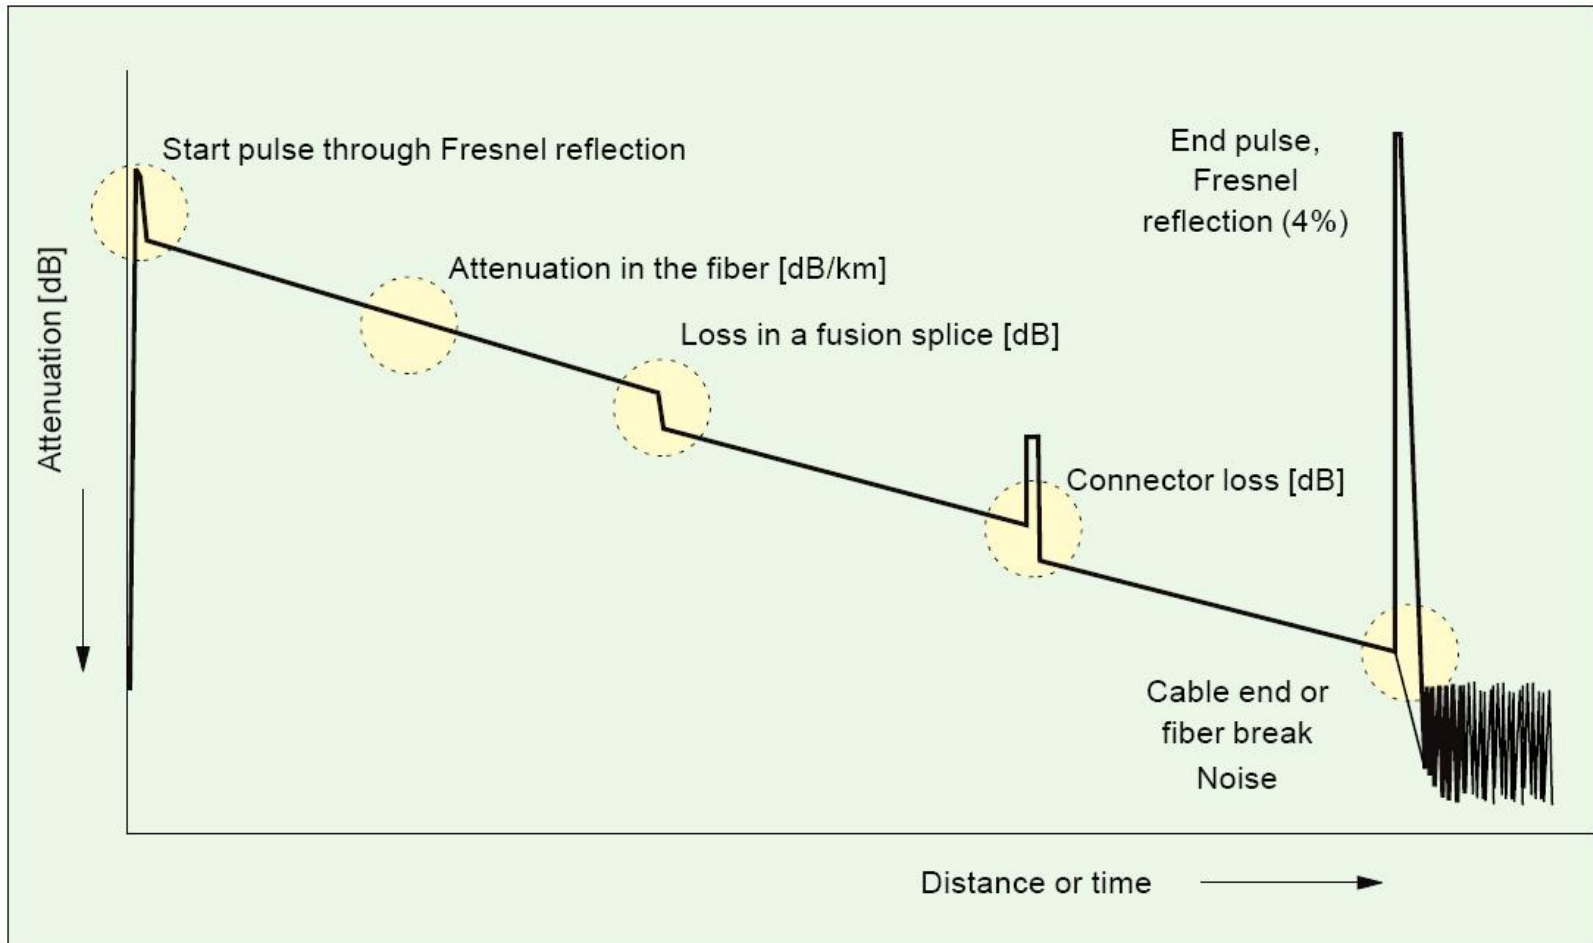


Efecte vizibile OTDR

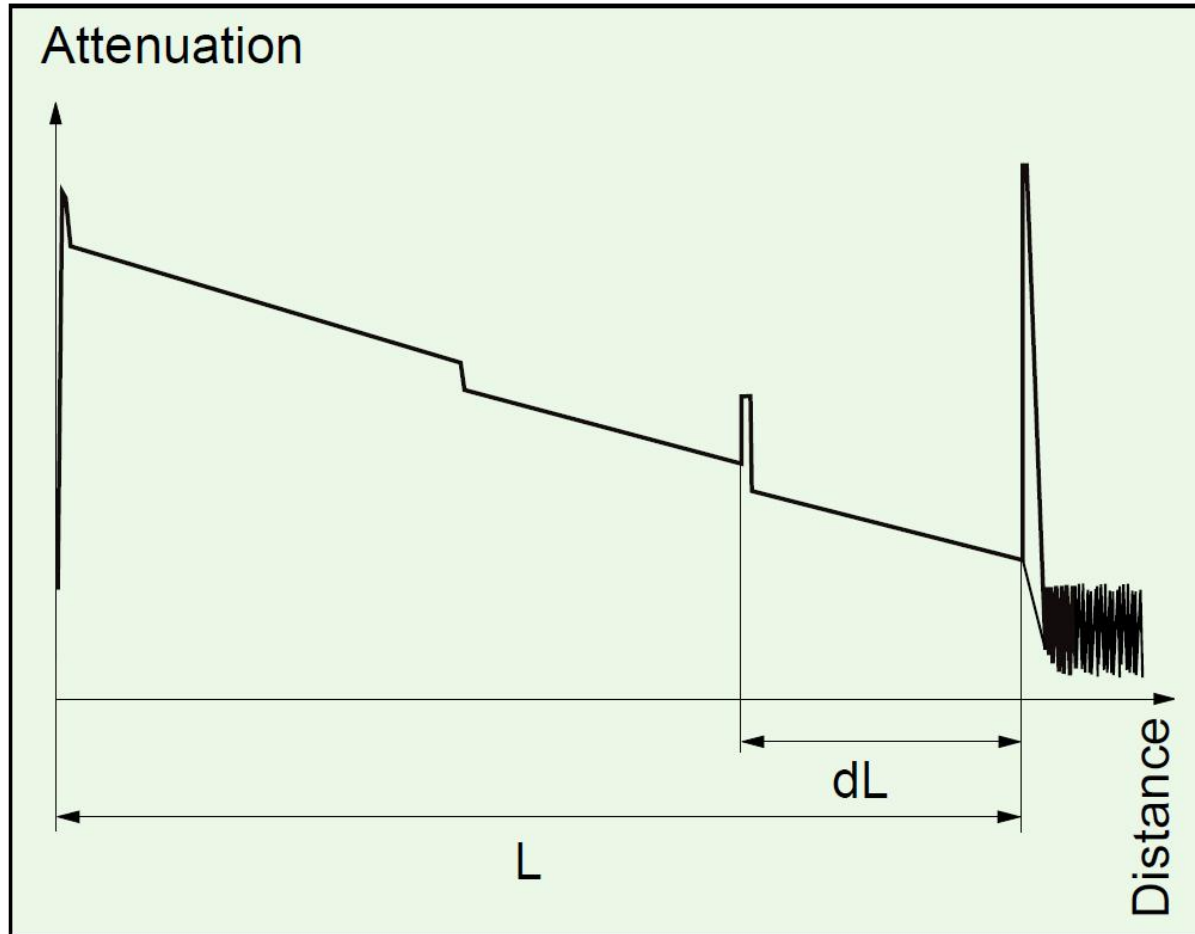

$$2 \cdot L = c \cdot t$$

$$L = \frac{c_0}{n} \cdot \frac{t}{2}$$

Efecte vizibile OTDR

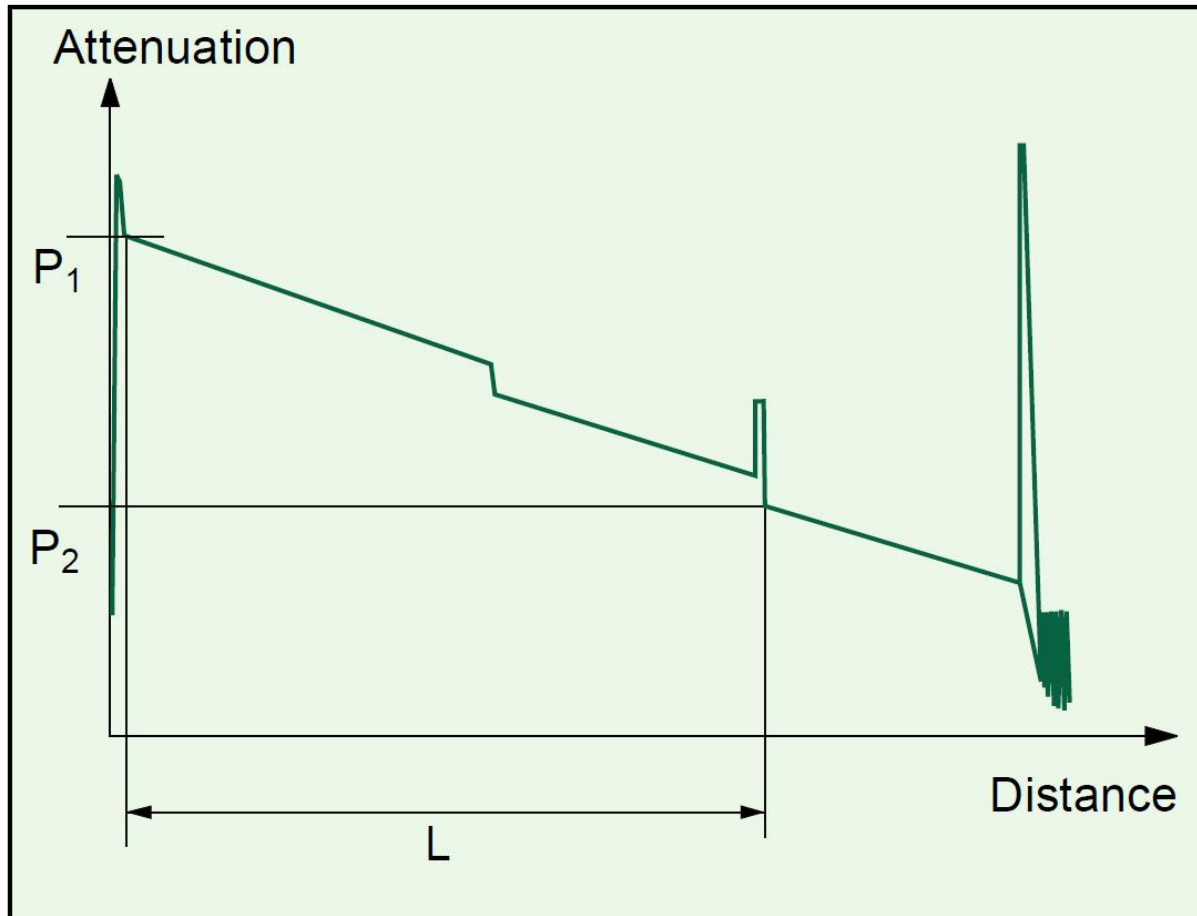


$$A[dB] = \frac{P_1 - P_2}{2}$$

$$A[dB/km] = \frac{P_1 - P_2}{2 \cdot L}$$


panta curbei

Efecte vizibile OTDR - Splice

- ▶ splice loss - $A(s)$

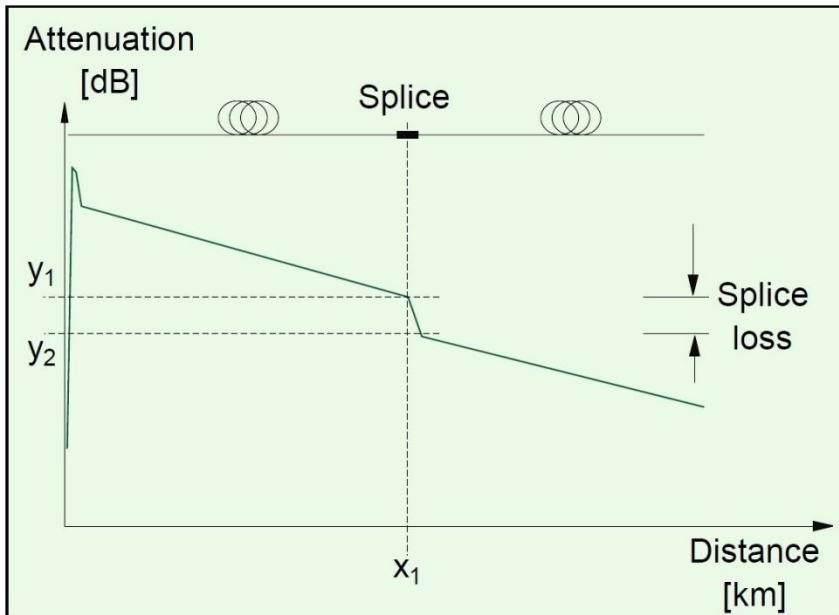


$$A(s) = y_1 - y_2$$

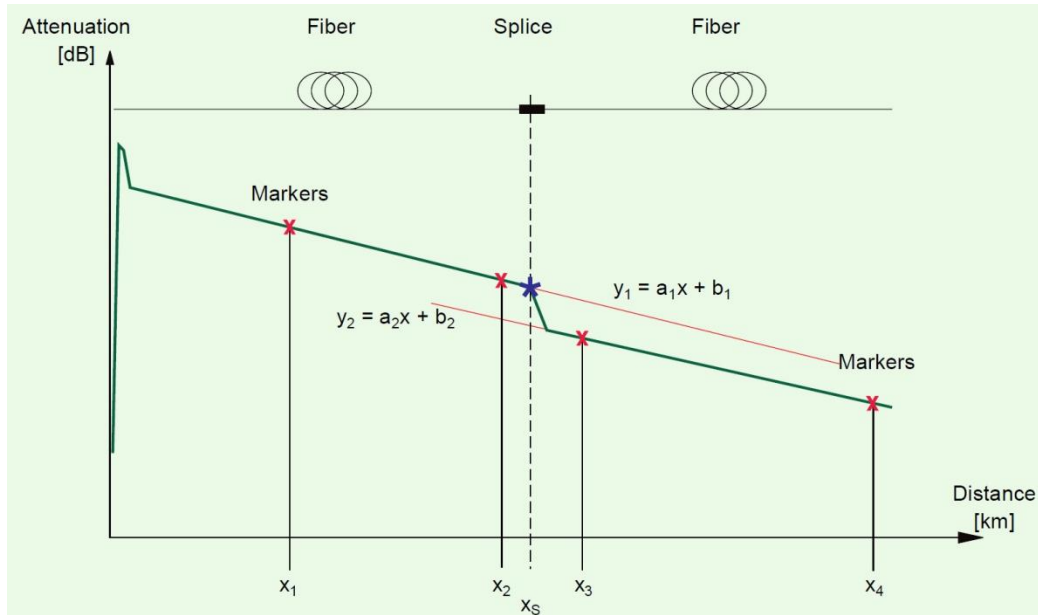

$$A(s) = y_1 - y_2 = x_s \cdot (a_1 - a_2) + (b_1 - b_2)$$

Efecte vizibile OTDR – Splice


a. same fiber spliced

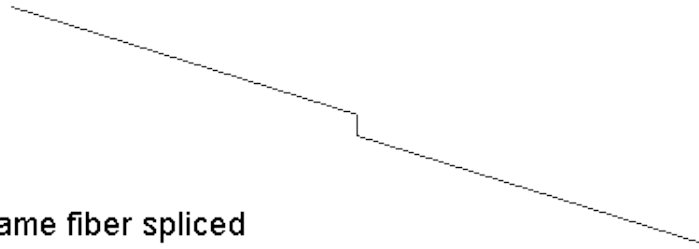

error caused by
fiber characteristics

actual loss

b. high loss fiber spliced to low loss fiber

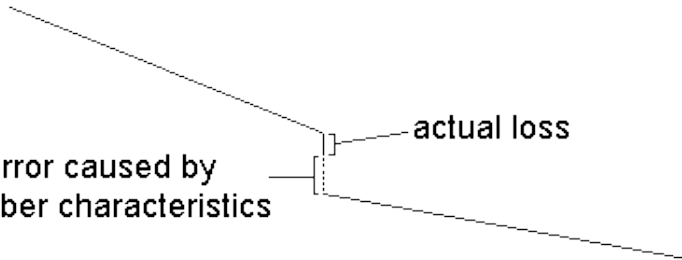


error caused by
fiber characteristics

actual loss

actual loss

error caused by
fiber characteristics


c. low loss fiber spliced to high loss fiber
can cause an apparent gain at a splice

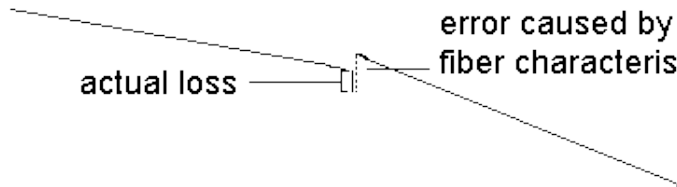

$$A(s) = \frac{A(s)_{A \rightarrow B} + A(s)_{B \rightarrow A}}{2}$$


Rezultat grafic al OTDR

► latimea pulsurilor luminoase

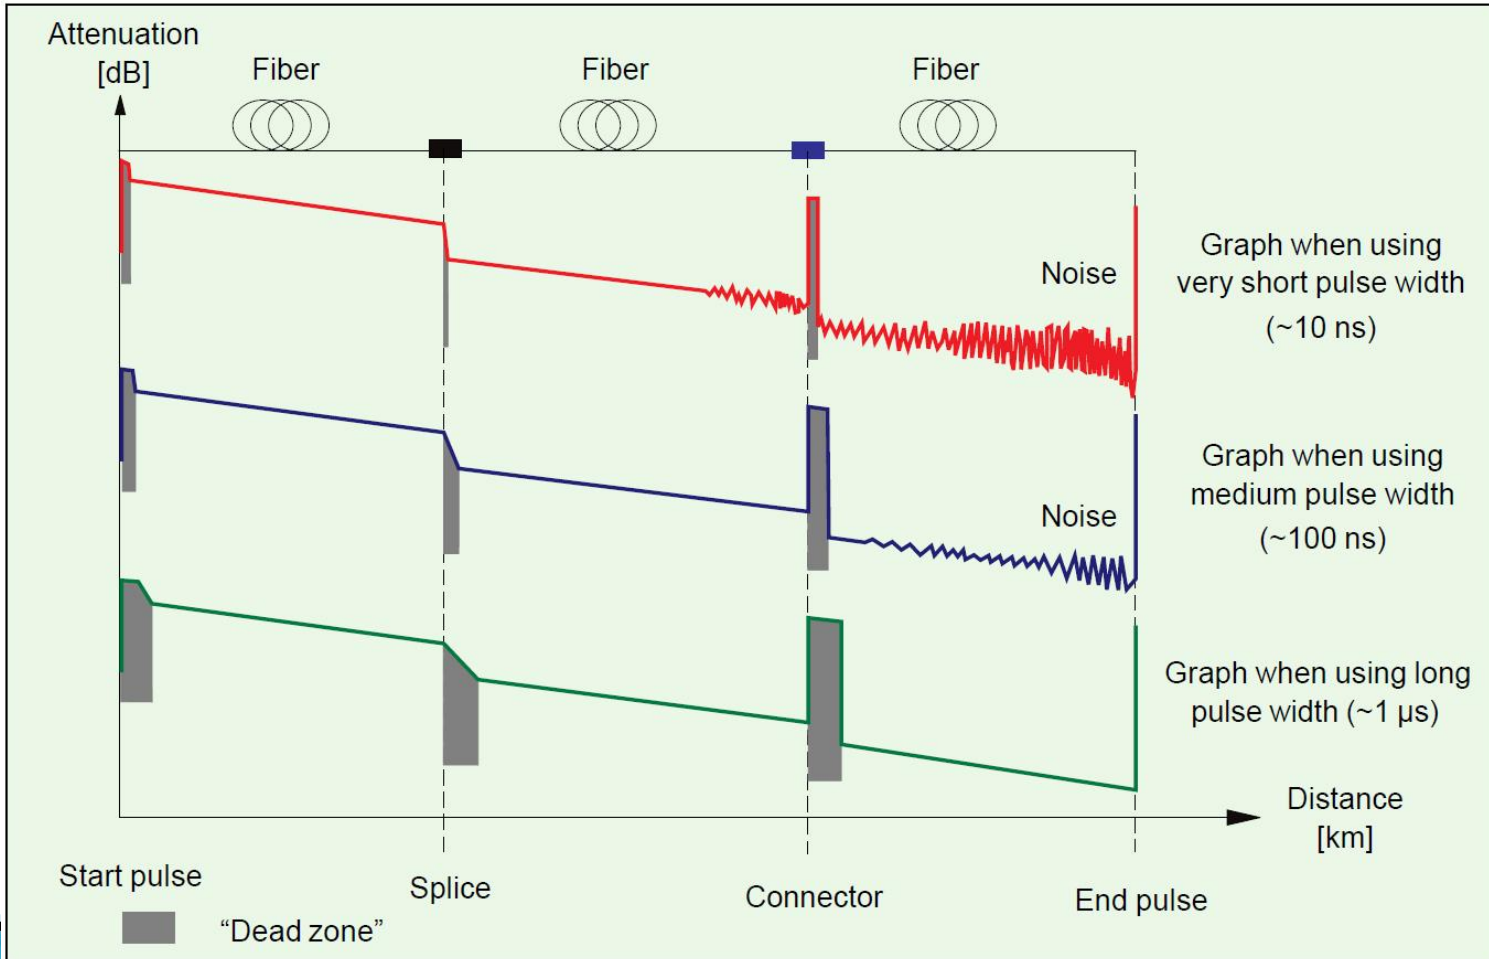

OTDR



Typical OTDR Trace

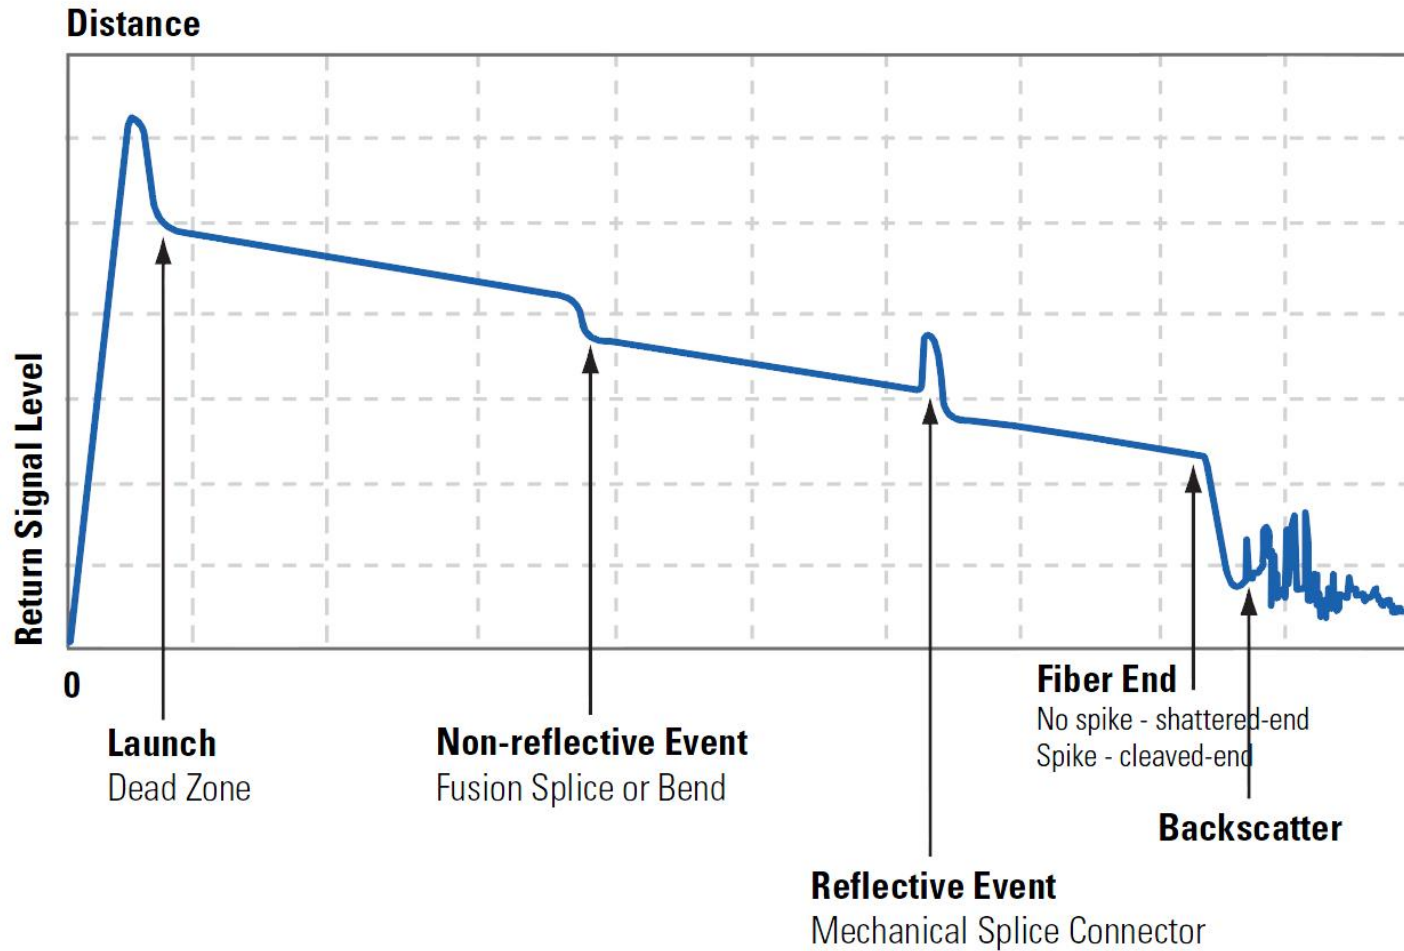

Stabilized light source


Optical power meter

► Masurarea puterii si atenuarii

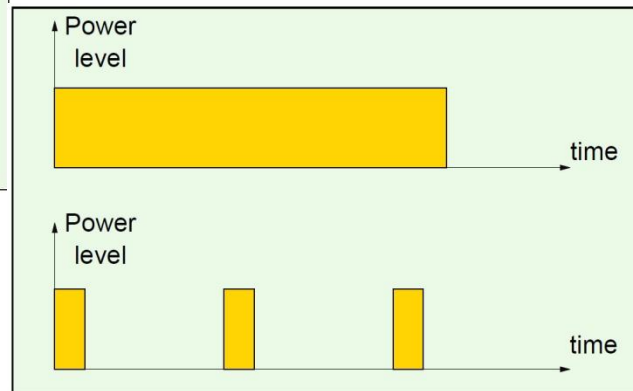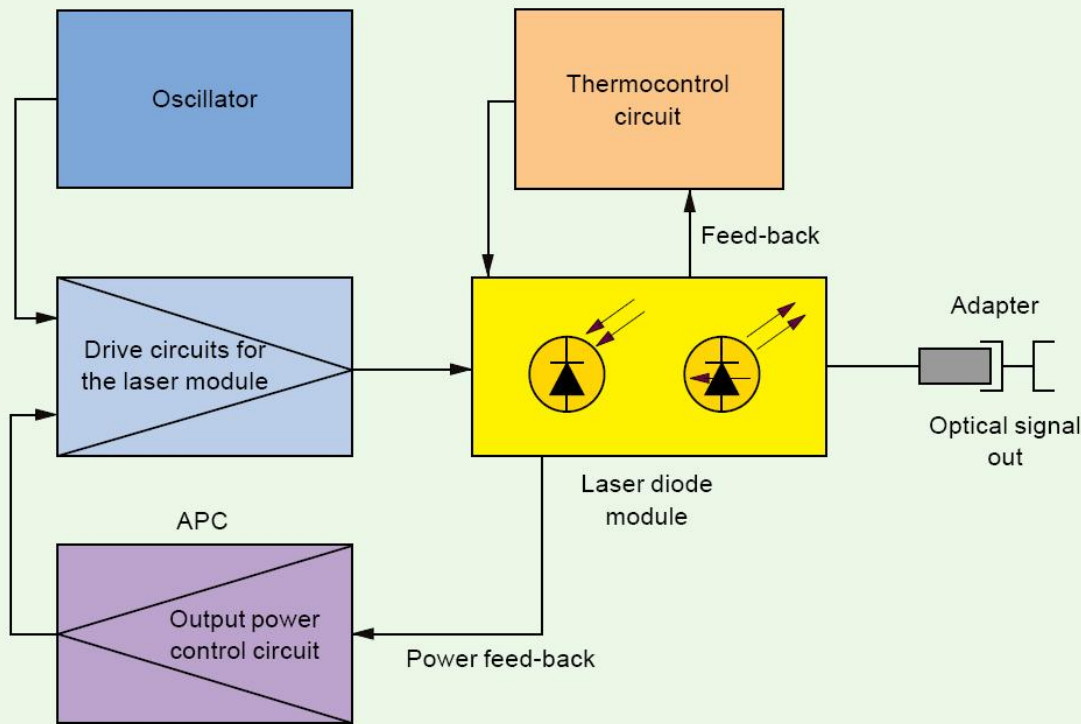


Masurarea puterii si atenuarii

► Masuratoare referinta

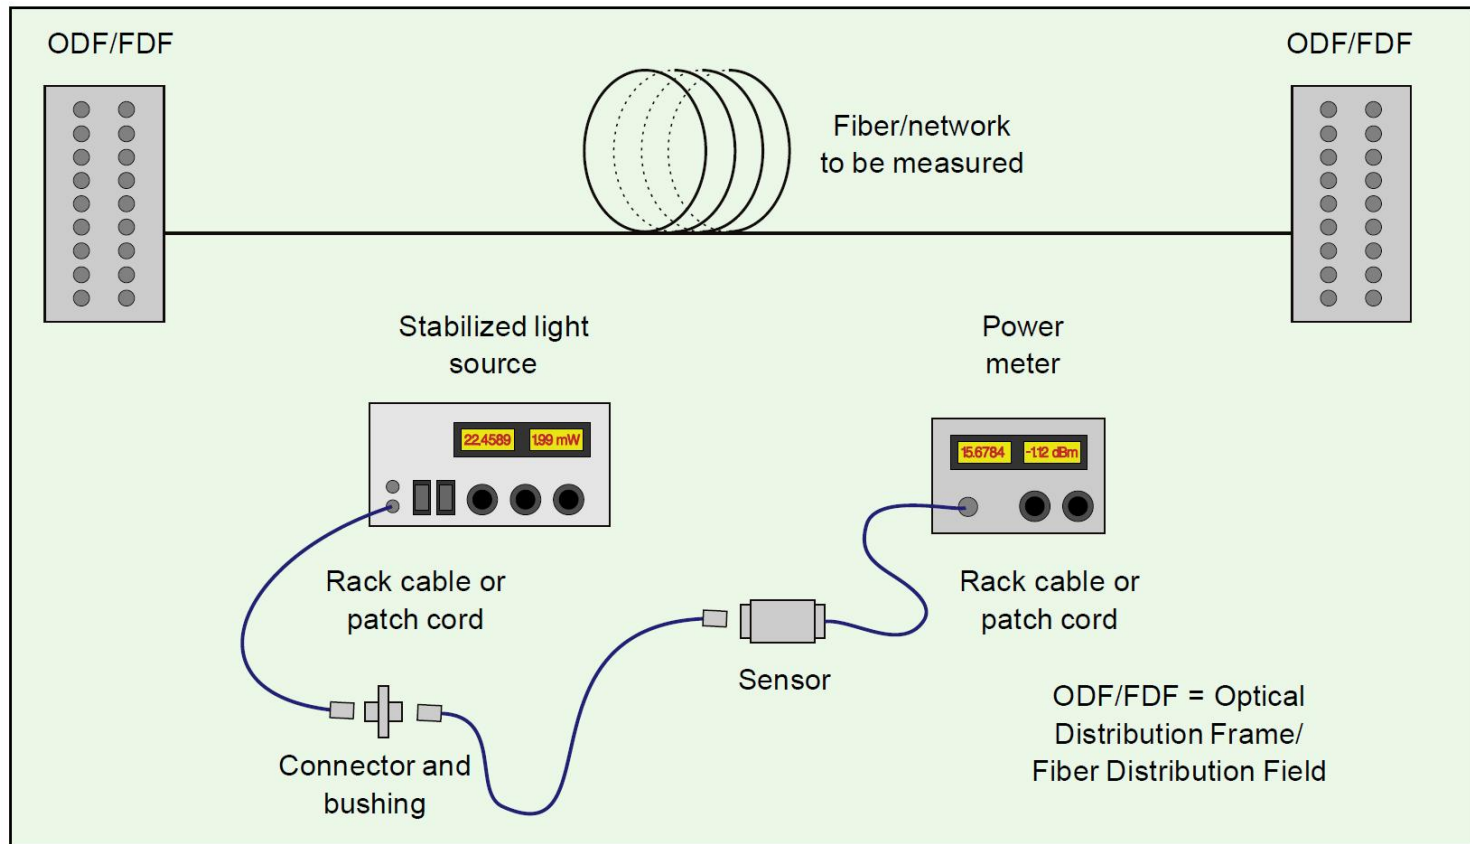


Masurarea puterii si atenuarii

► Masuratoare instalatie

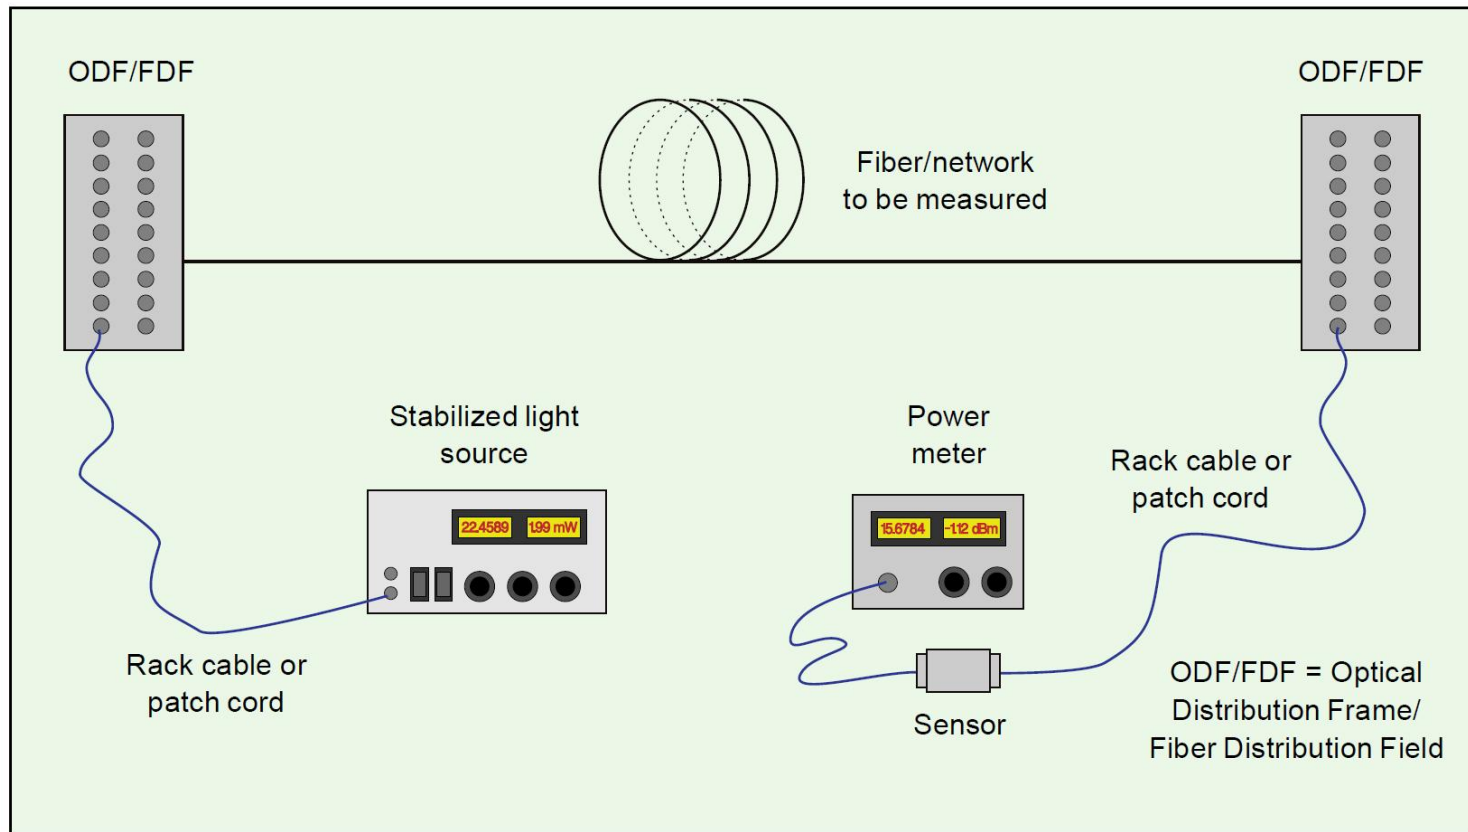



Masurare conectori si splice

- ▶ Se elimina efectele fibrei

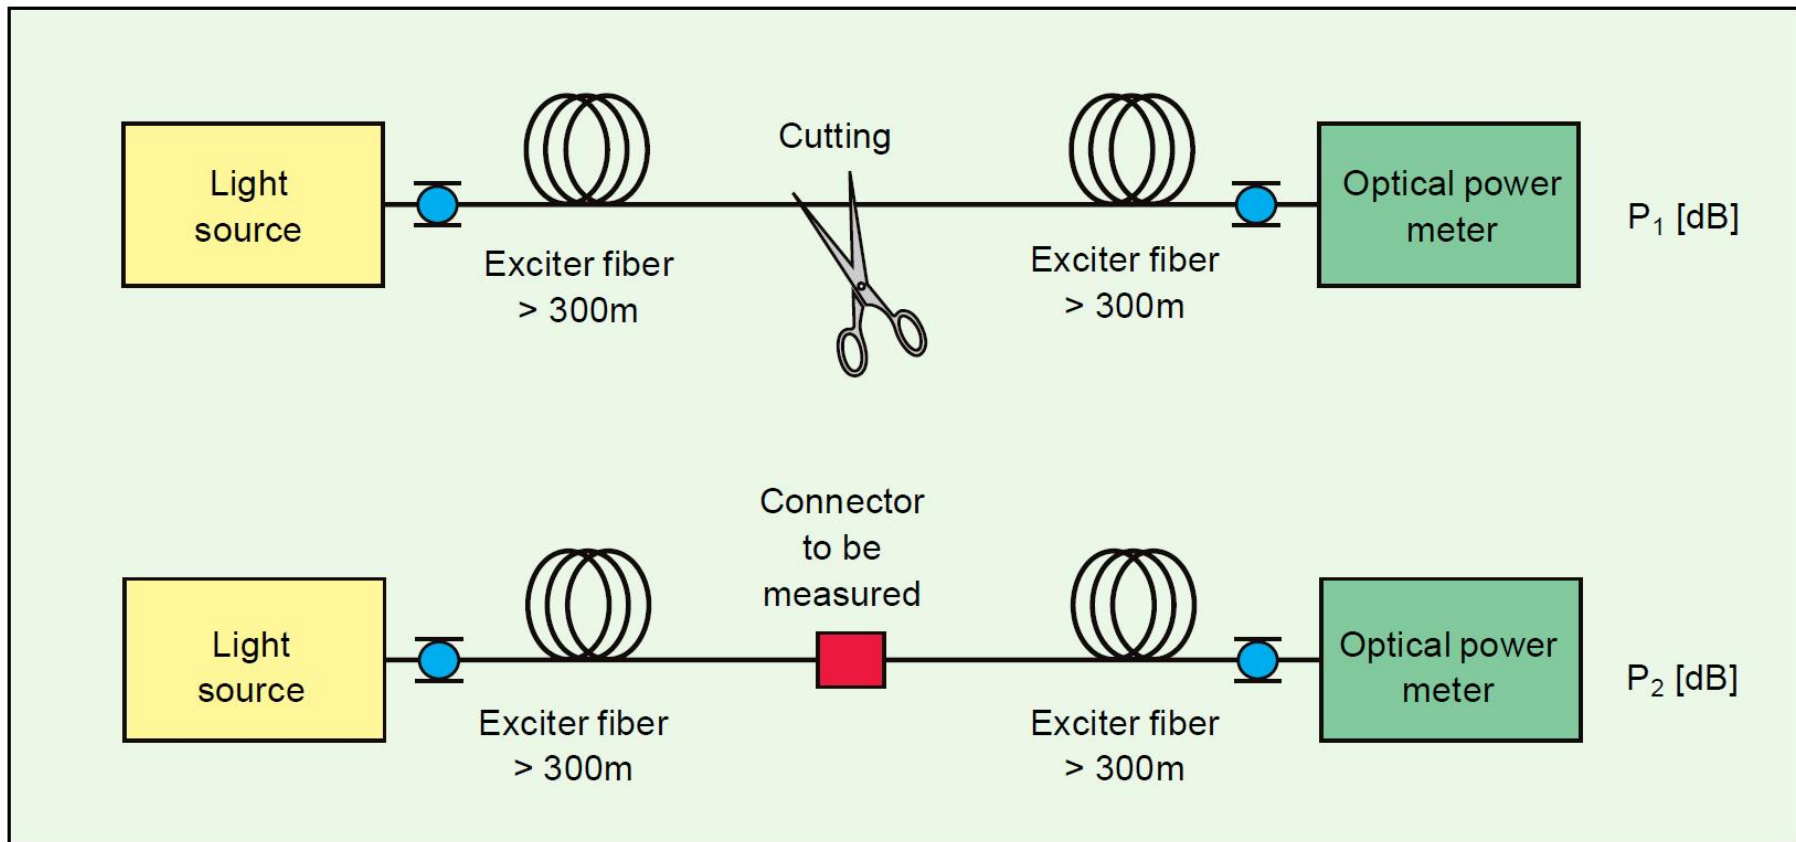

Taiere – Cleaving

- ▶ Tehnici necesare pentru a asigura o taiere perpendiculara pe axa fibrei


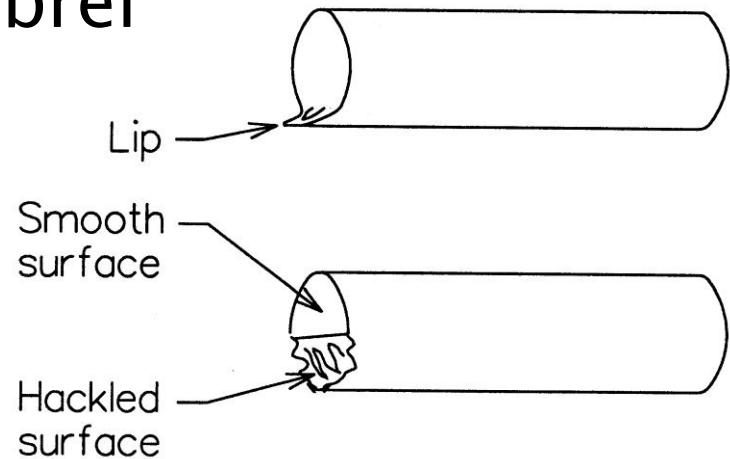
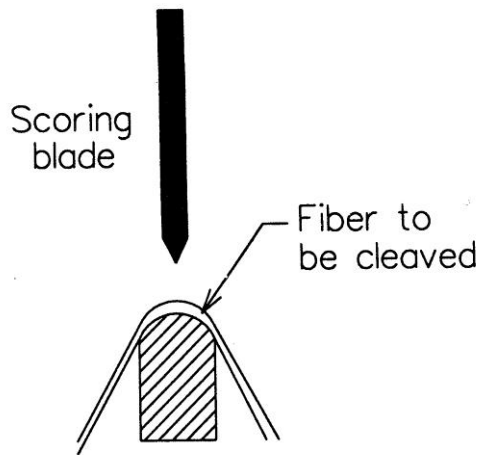


Lipire prin fuziune




Splice prin fuziune

Fibers Stripped of Coating, Cleaned, and Cleaved, are Brought Together During the Fusion Arc

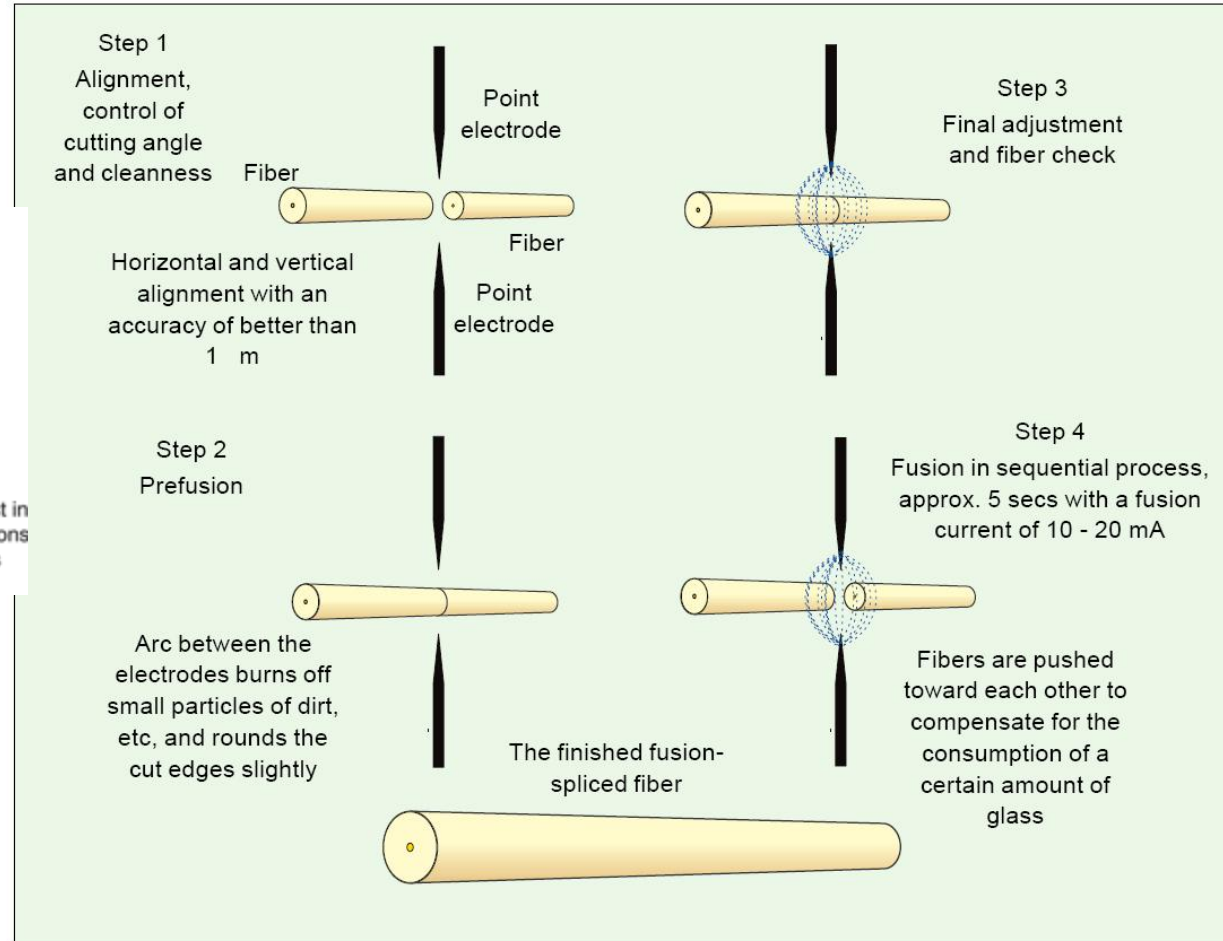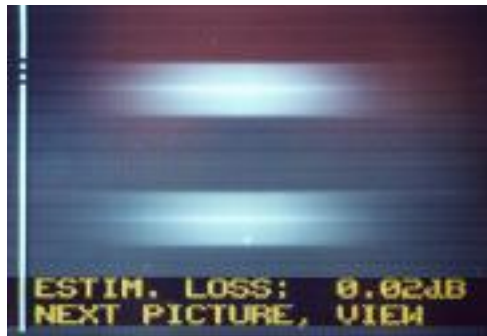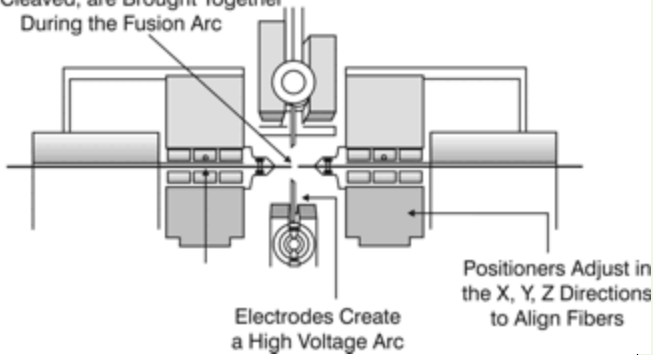


Splice prin fuziune



Causes of faults in fiber fusion

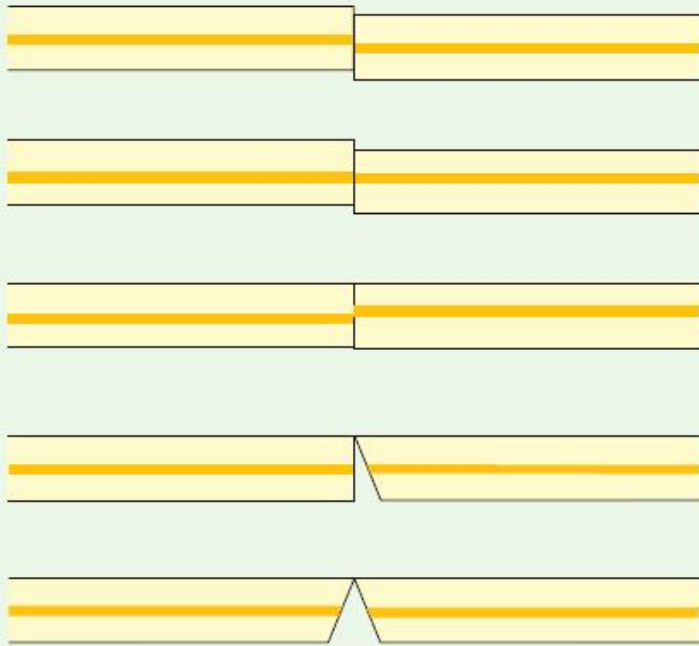


Appearance after fusion

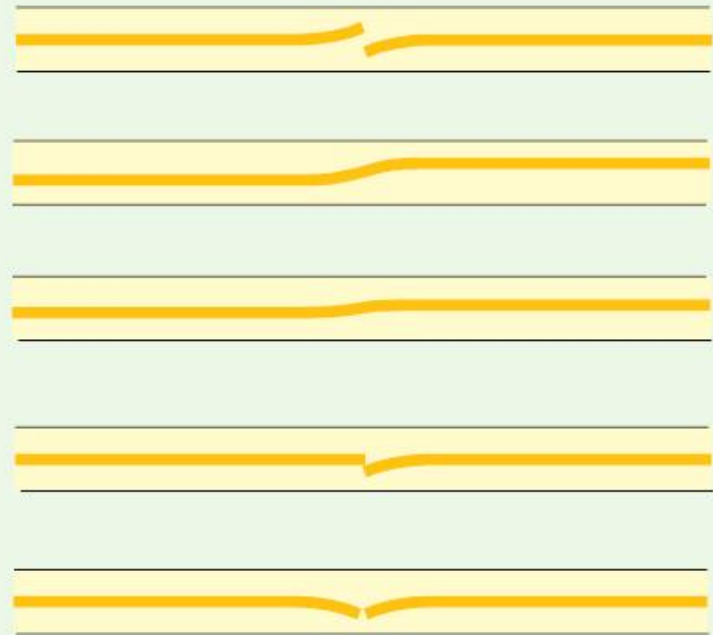



Splice mechanic – bloc V

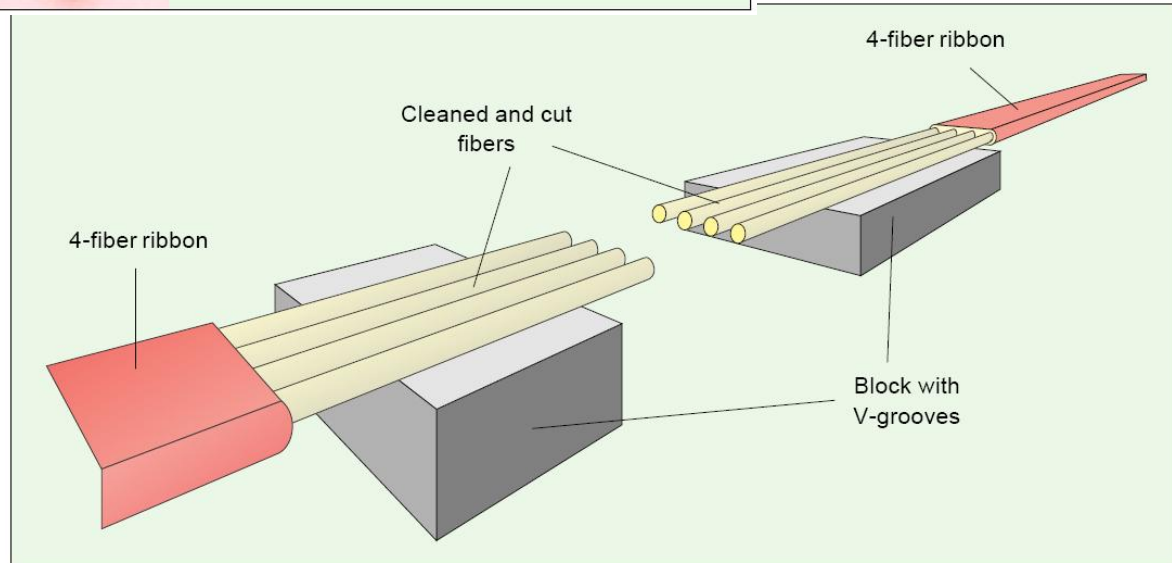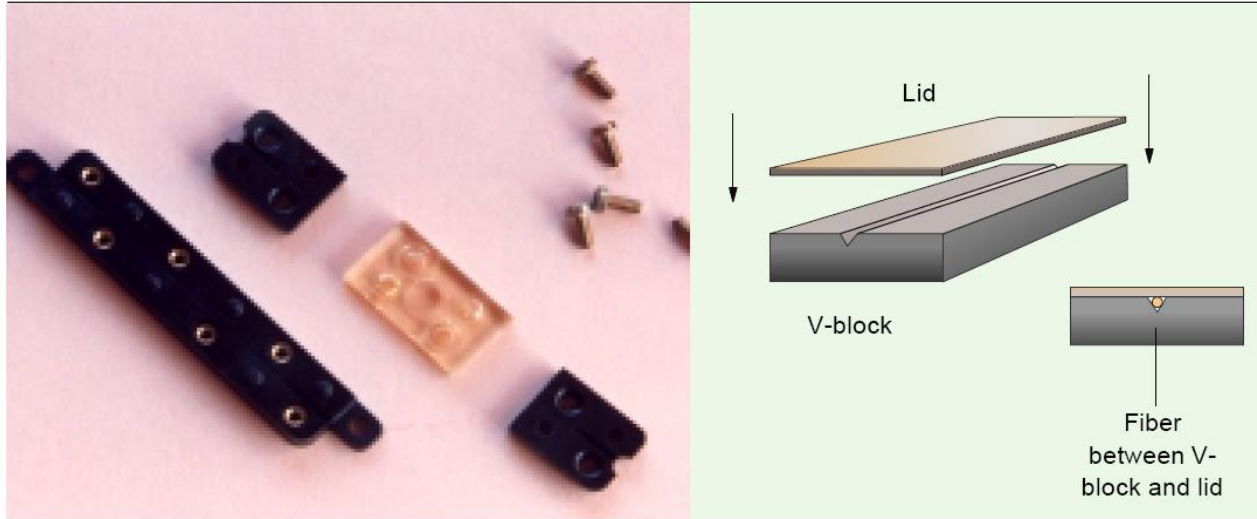

Splice mechanic - bloc V

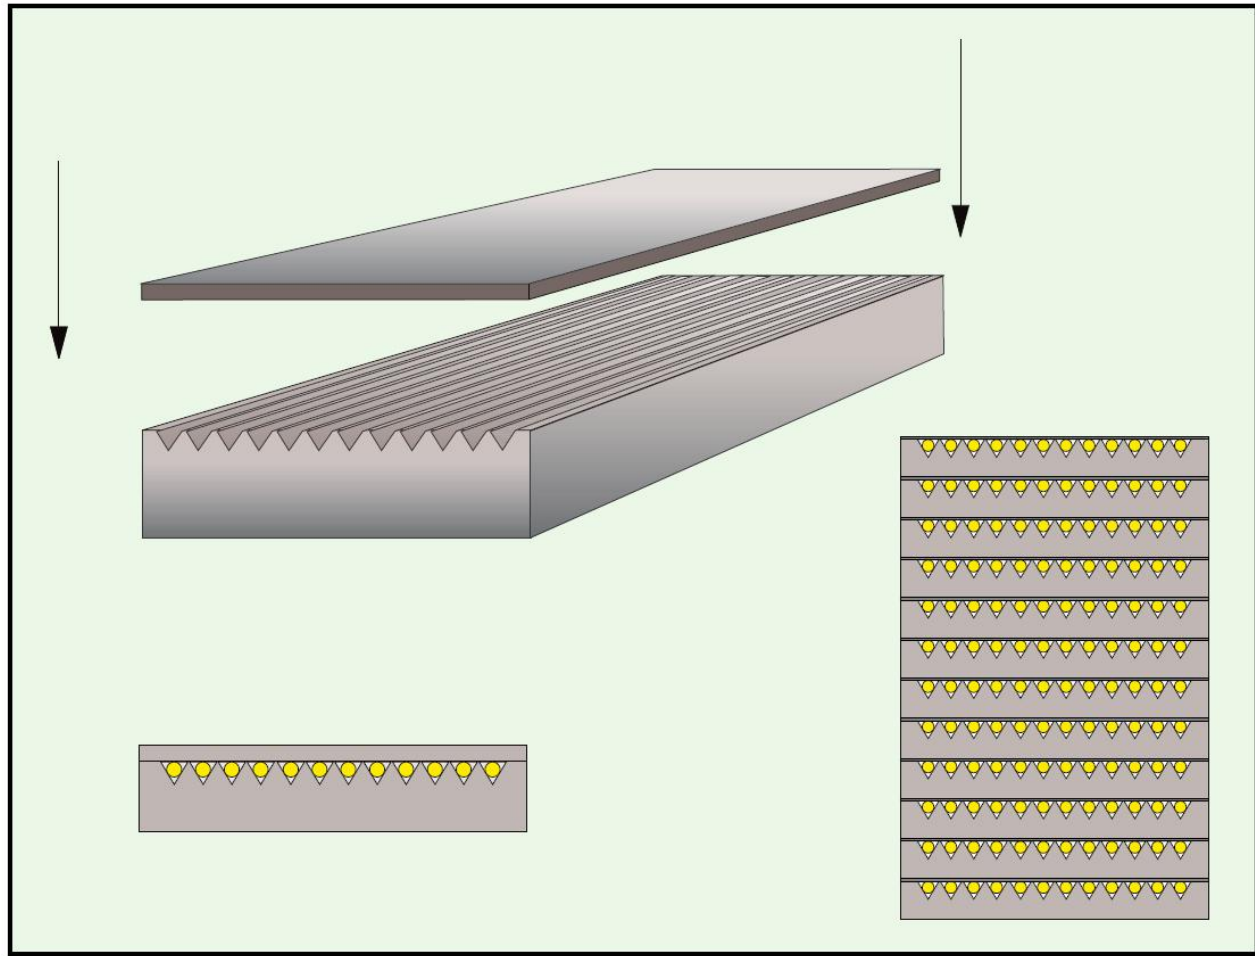


Splice mechanic

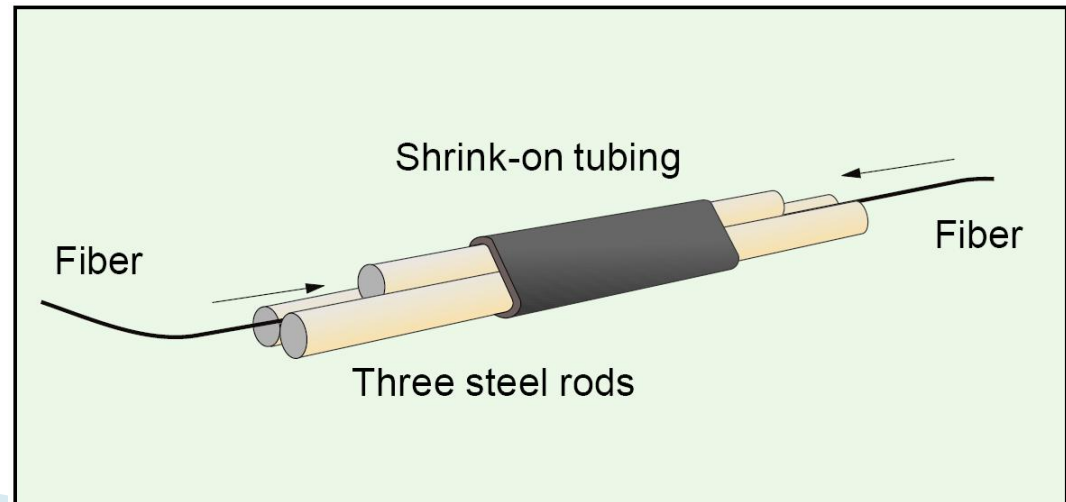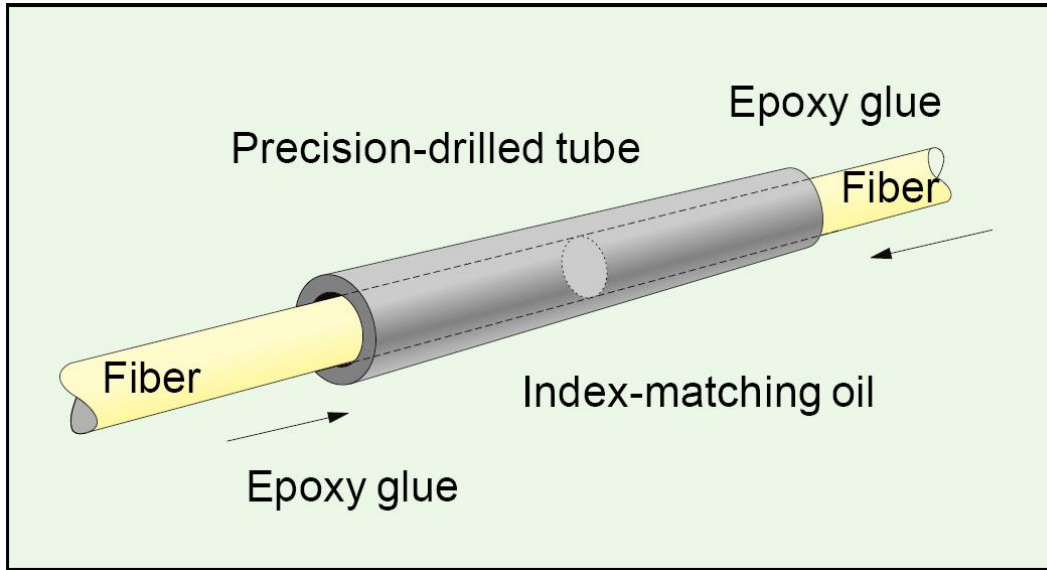


Probleme Fibre/Conectori

Offset




Angular Misalignment




Separation




Core Eccentricity





Core Ellipticity





Reflections & Interference

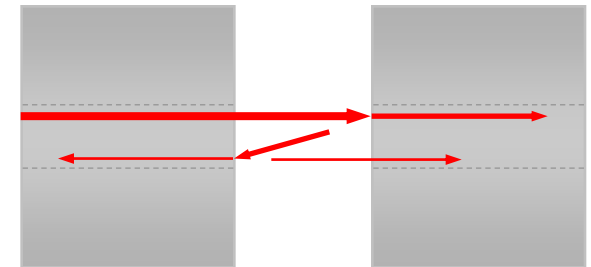


Cabluri

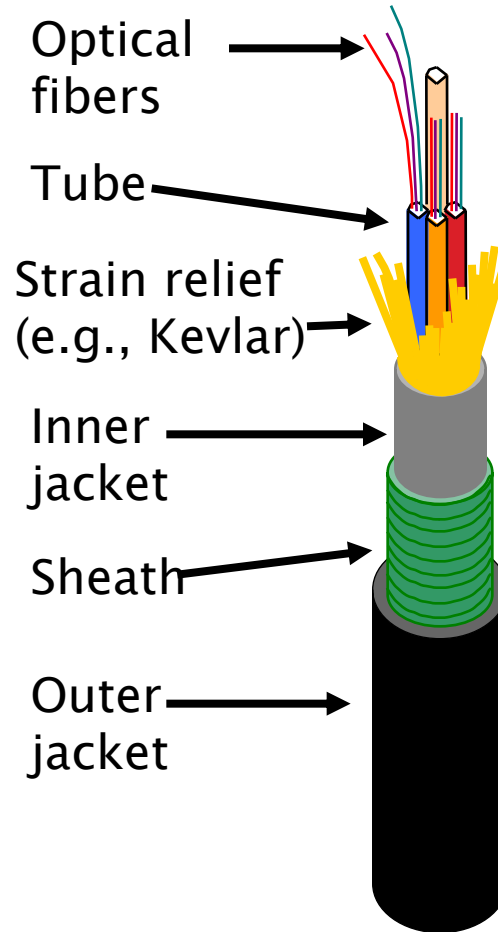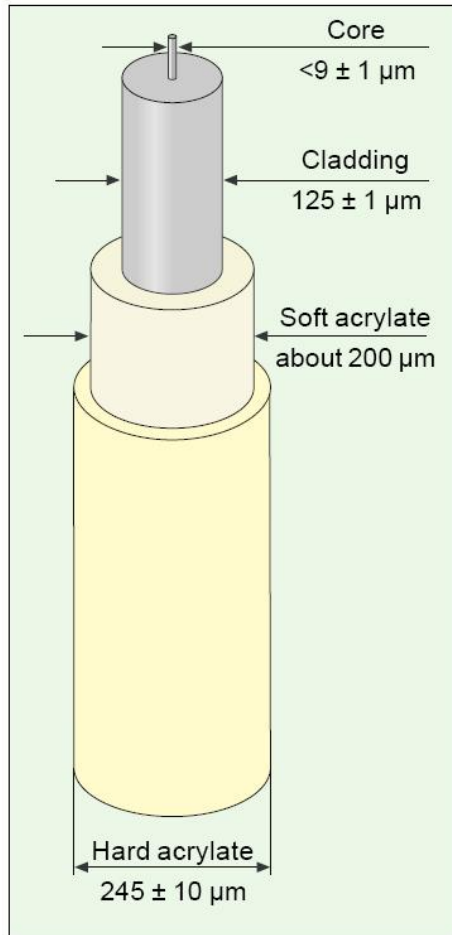


Cabluri

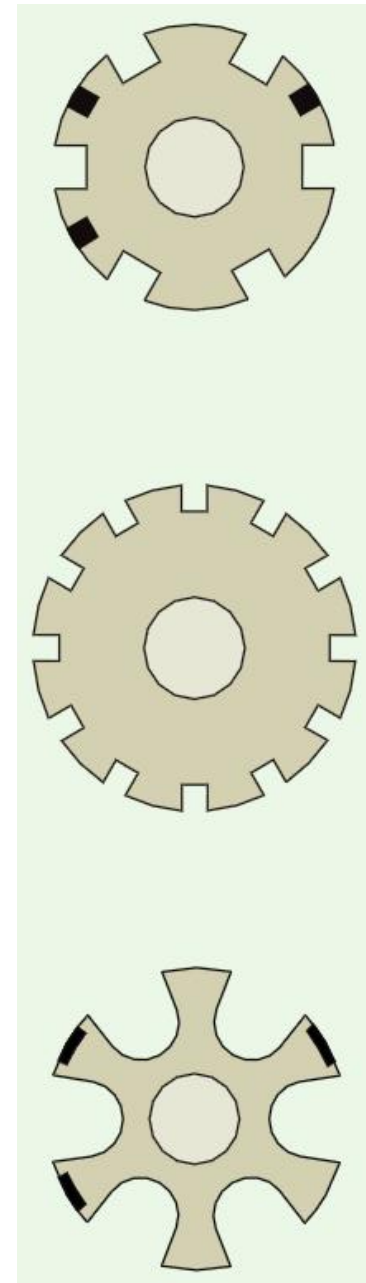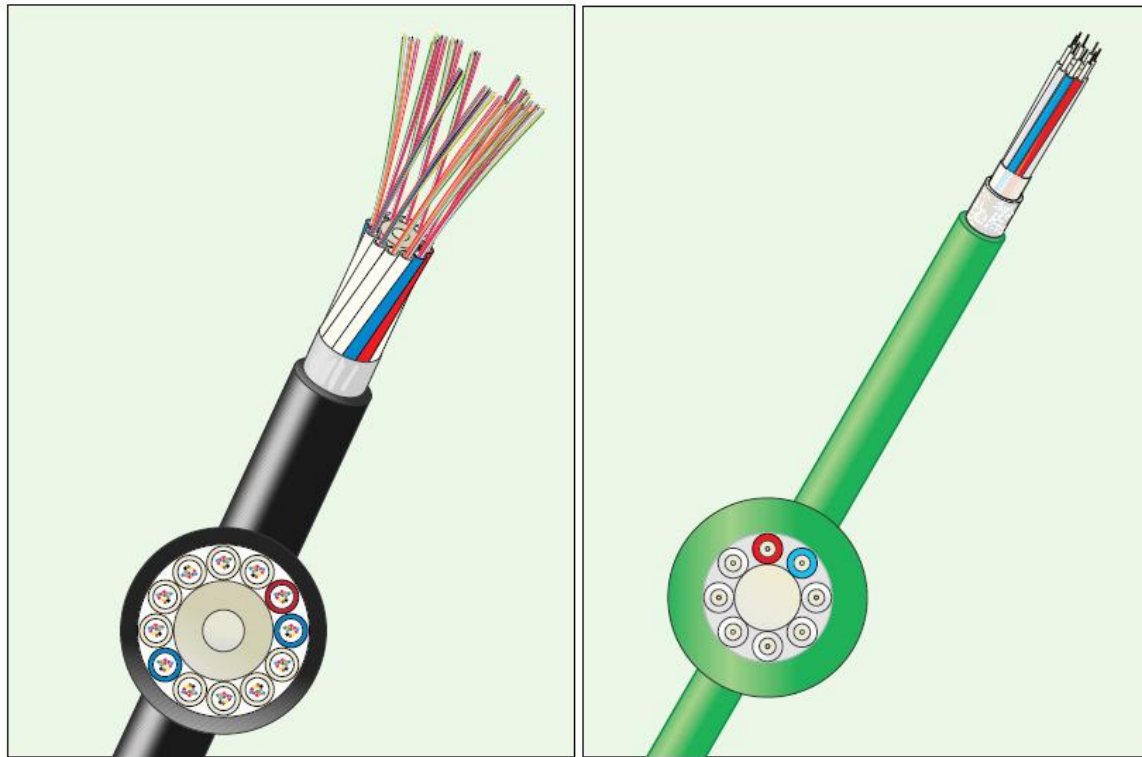



Cabluri

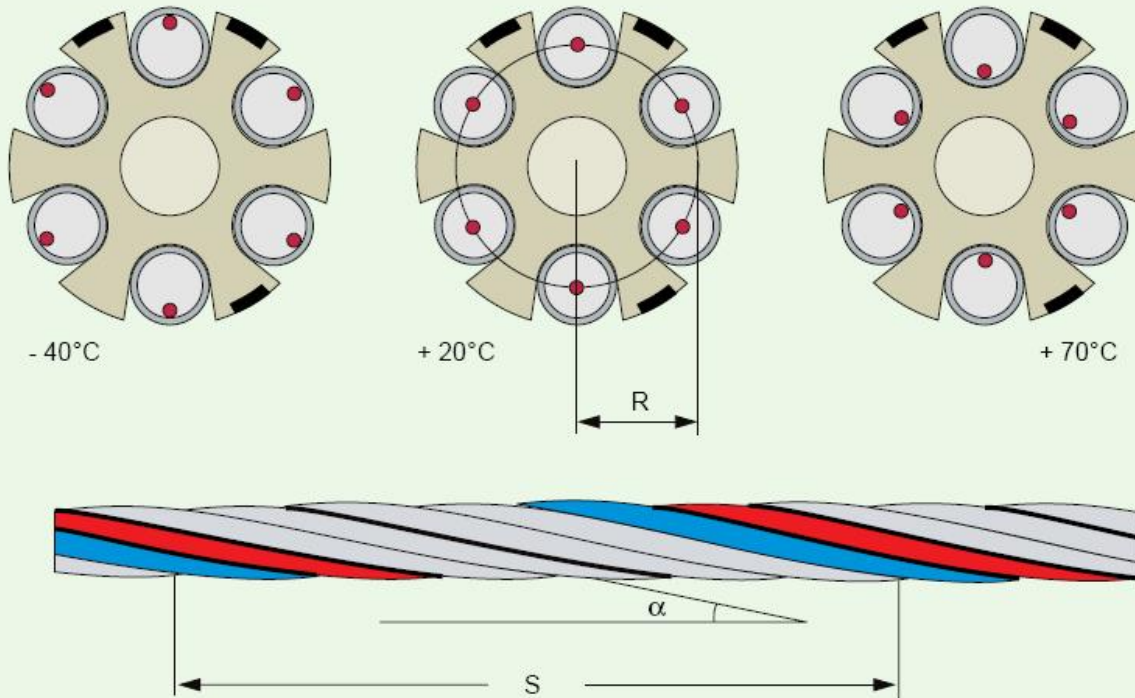


$$L = S \sqrt{1 + \left(\frac{2\pi R}{S} \right)^2}$$

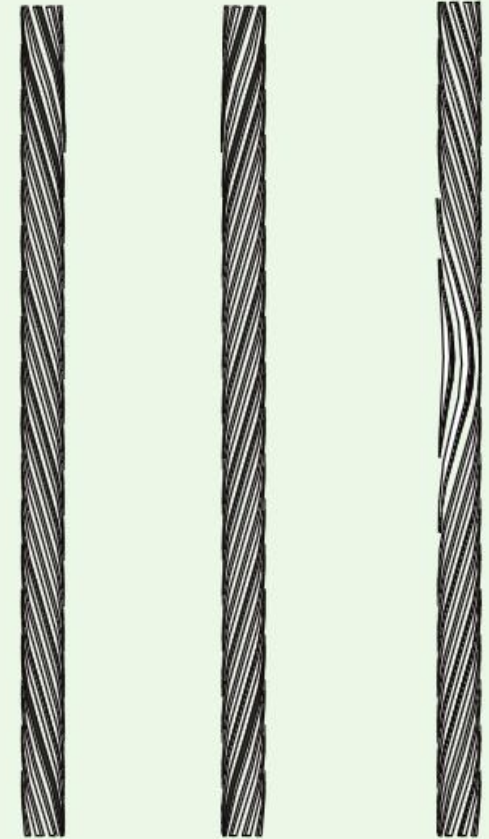

Cabluri

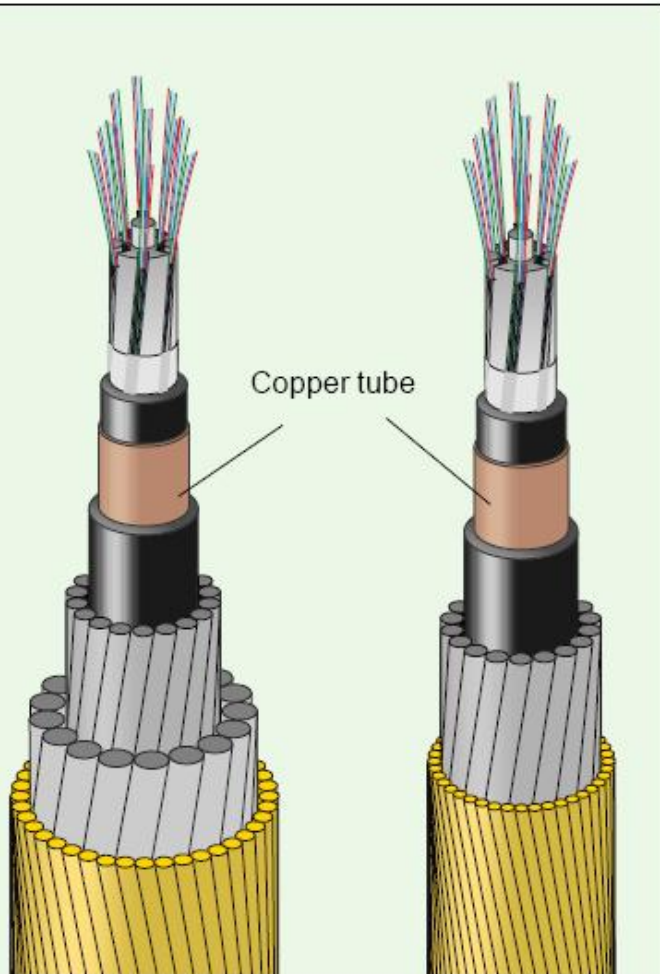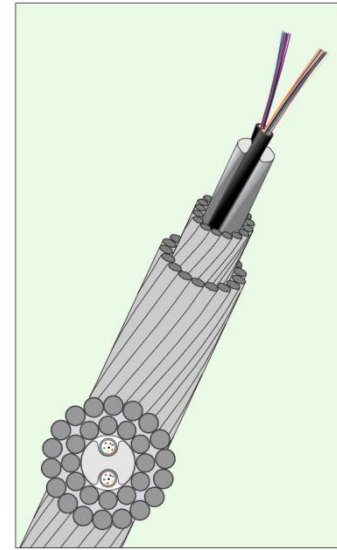

Primary coated fiber




12-fiber ribbon



12 × 12-fiber ribbons
= 144 fibers



"Lose tube"

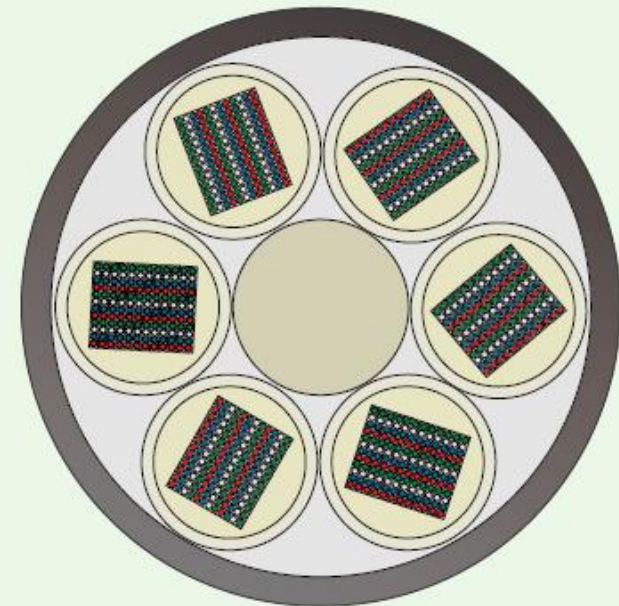


Finished cable with central strength member and with six tubes with each tube containing 144 fibers

Conettori



Conettori

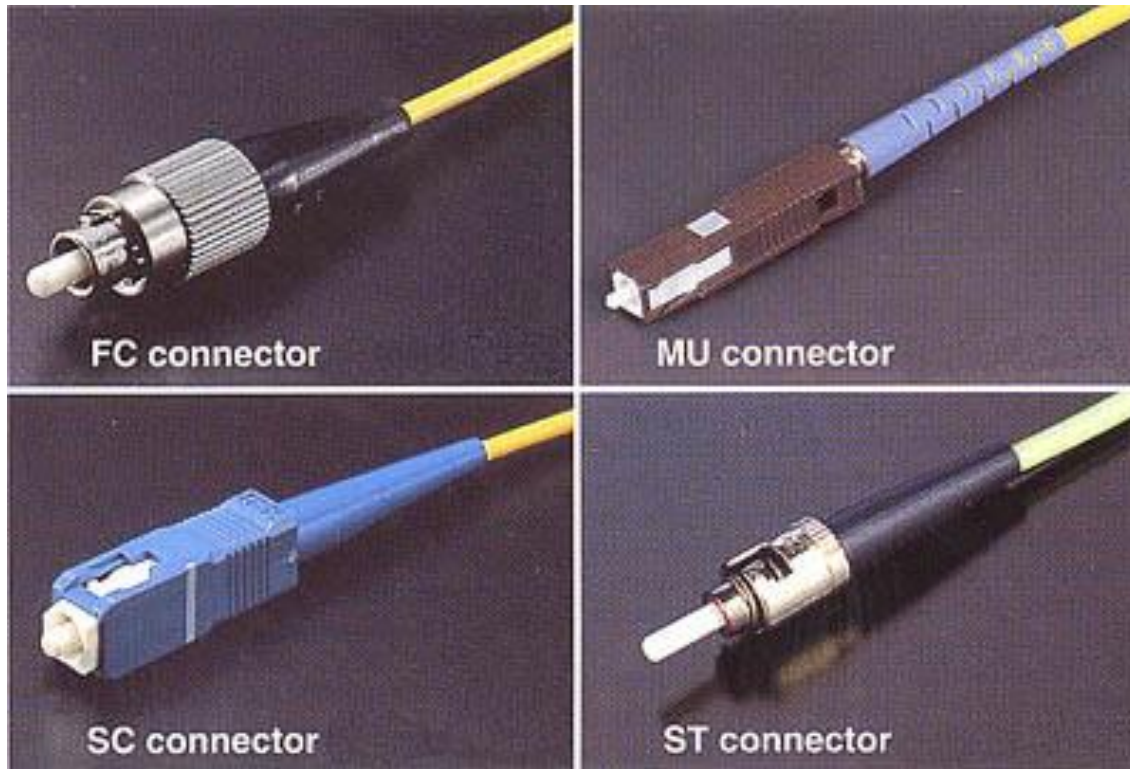

ST

All fiber-optic connectors use ferrules to hold the ends of the fiber and keep them properly aligned.




SMA Type 906

The ST connector uses a half-twist bayonet type of lock, while SMA and FC use threaded connections.




FC

The SC uses a push-pull connector similar to common audio and video plugs and sockets.



SC

The MIC is the standard FDDI connector.



MIC

The Fiber Jack connector attaches two fibers in a snap lock connector similar in size and ease of use as an RJ-45 connector.



Fiber Jack






MT-RJ

MT-RJ is a popular connector for two fibers in a very small form factor.

Conettori


- ▶ Verificati <http://rf-opto.etti.tuiasi.ro>

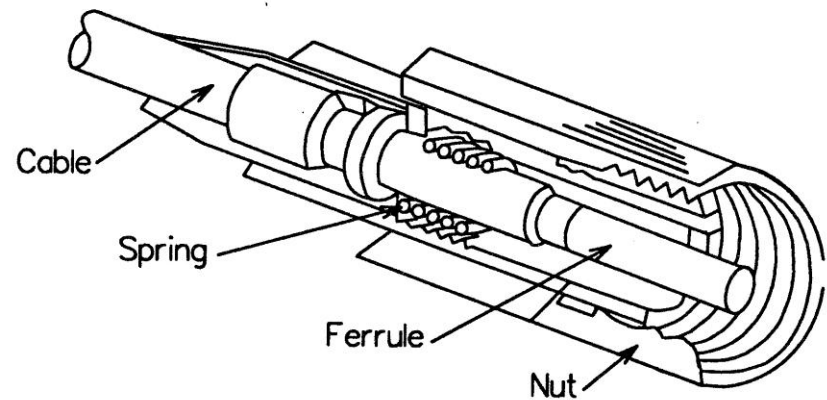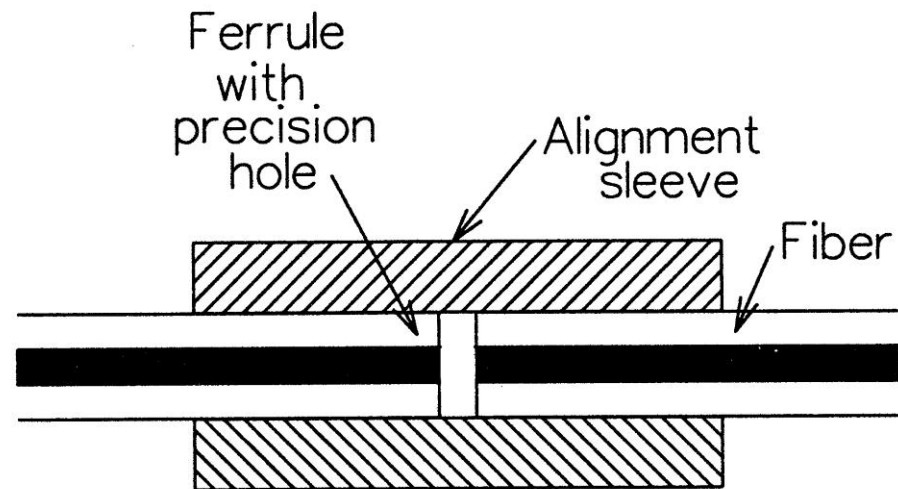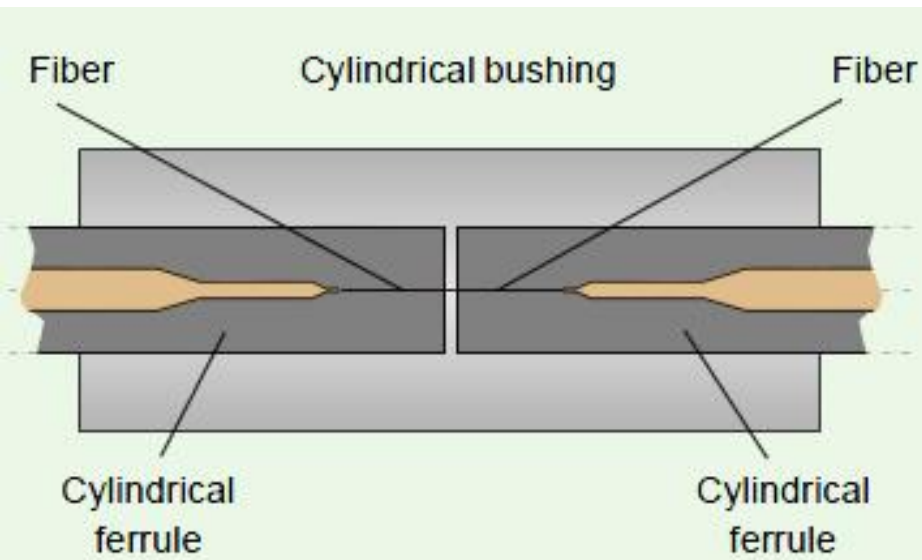


Conettori

▶ Ferula semisferica



- 20mm
- 60mm

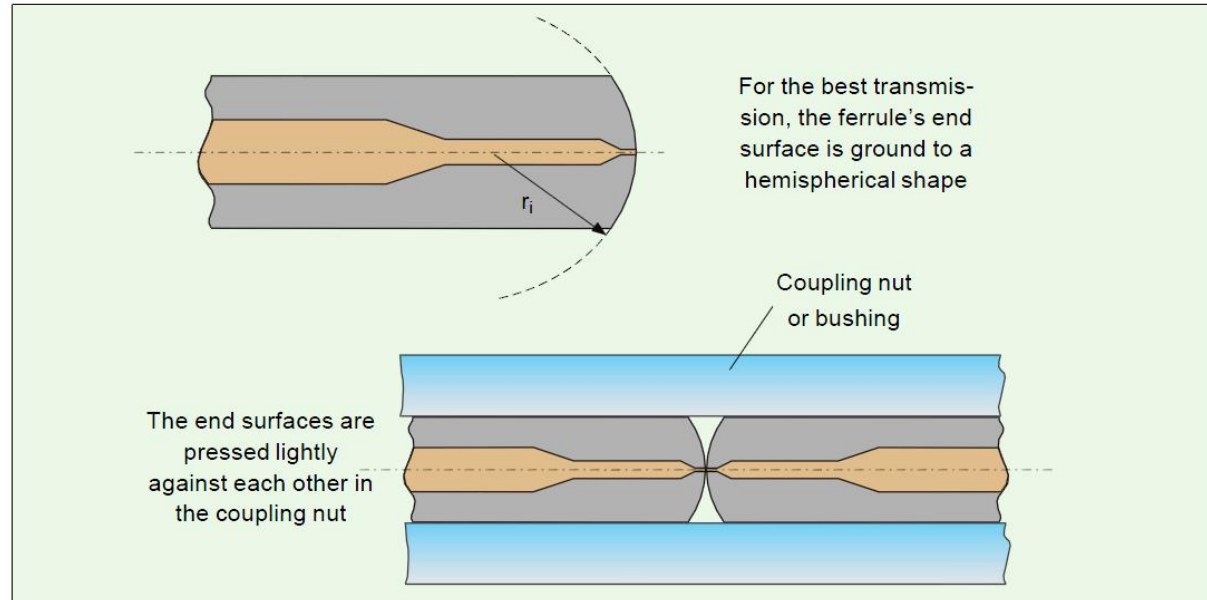

▶ Conettori multifibra

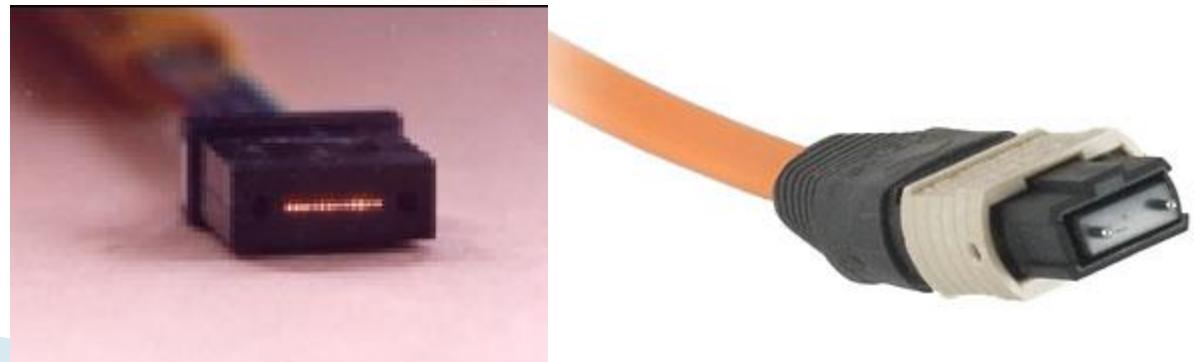


Expanded beam connector

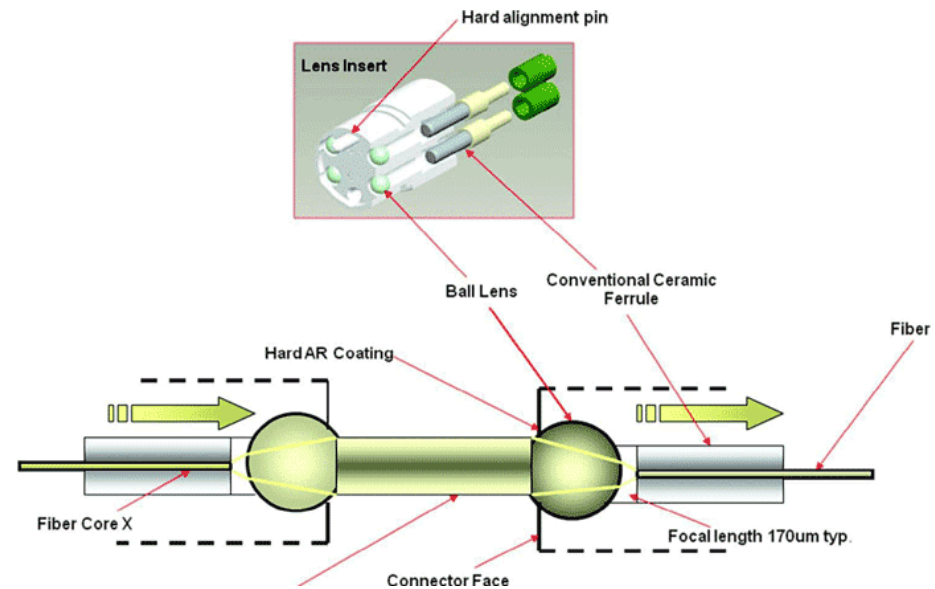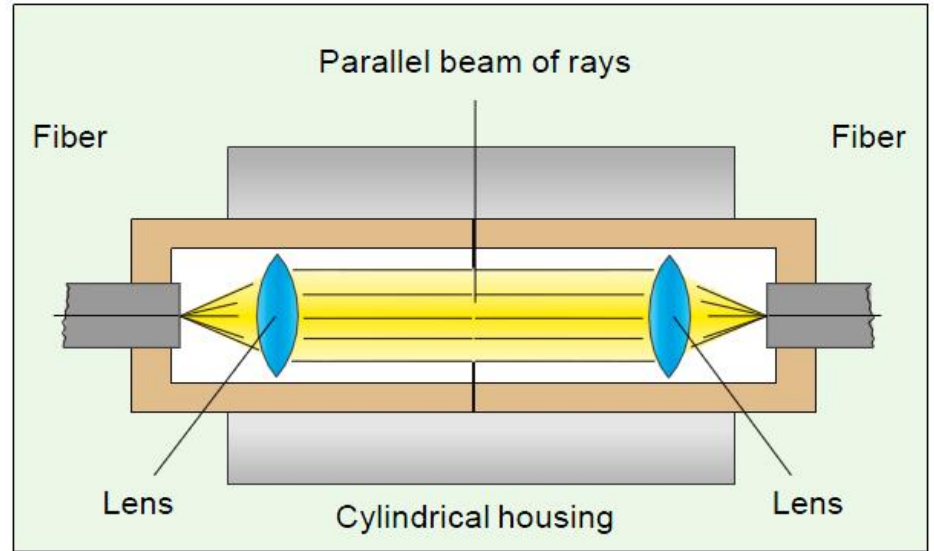


FTTH

- ▶ FTTN: Fiber to the node, neighborhood
- ▶ FTTC: Fiber to the curb
- ▶ FTTB: Fiber to the building
- ▶ FTTH: Fiber to the home

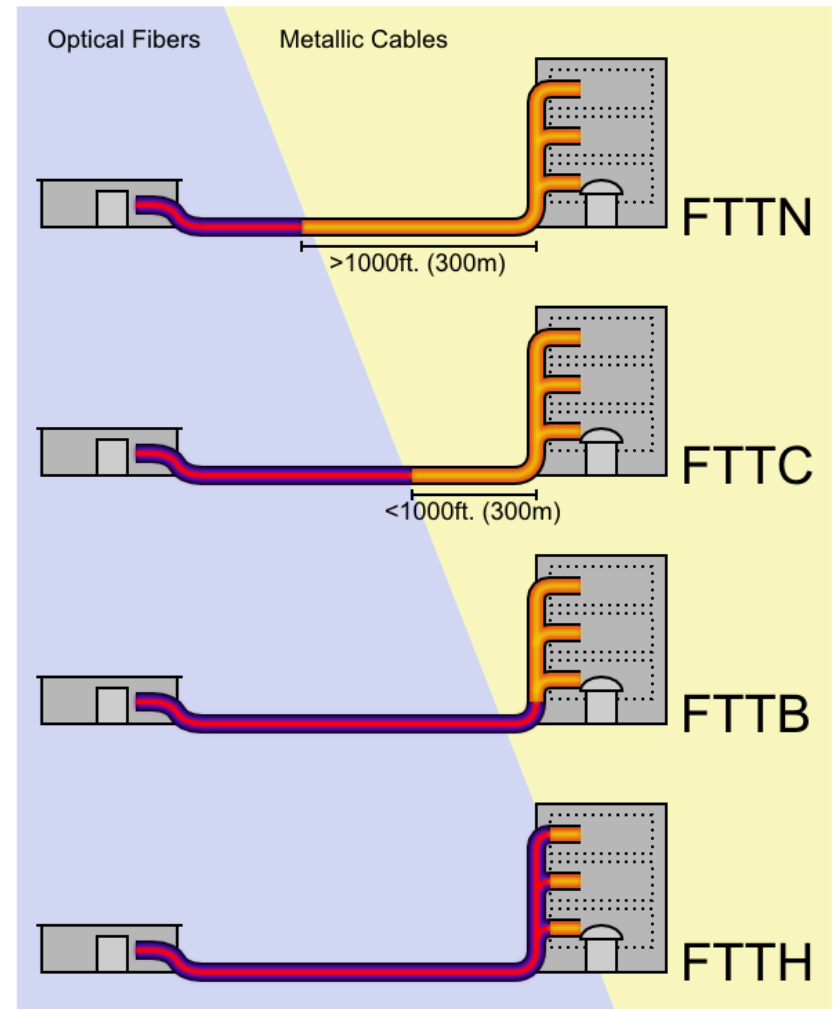

FDDI

- ▶ Fiber Distributed Data Interface

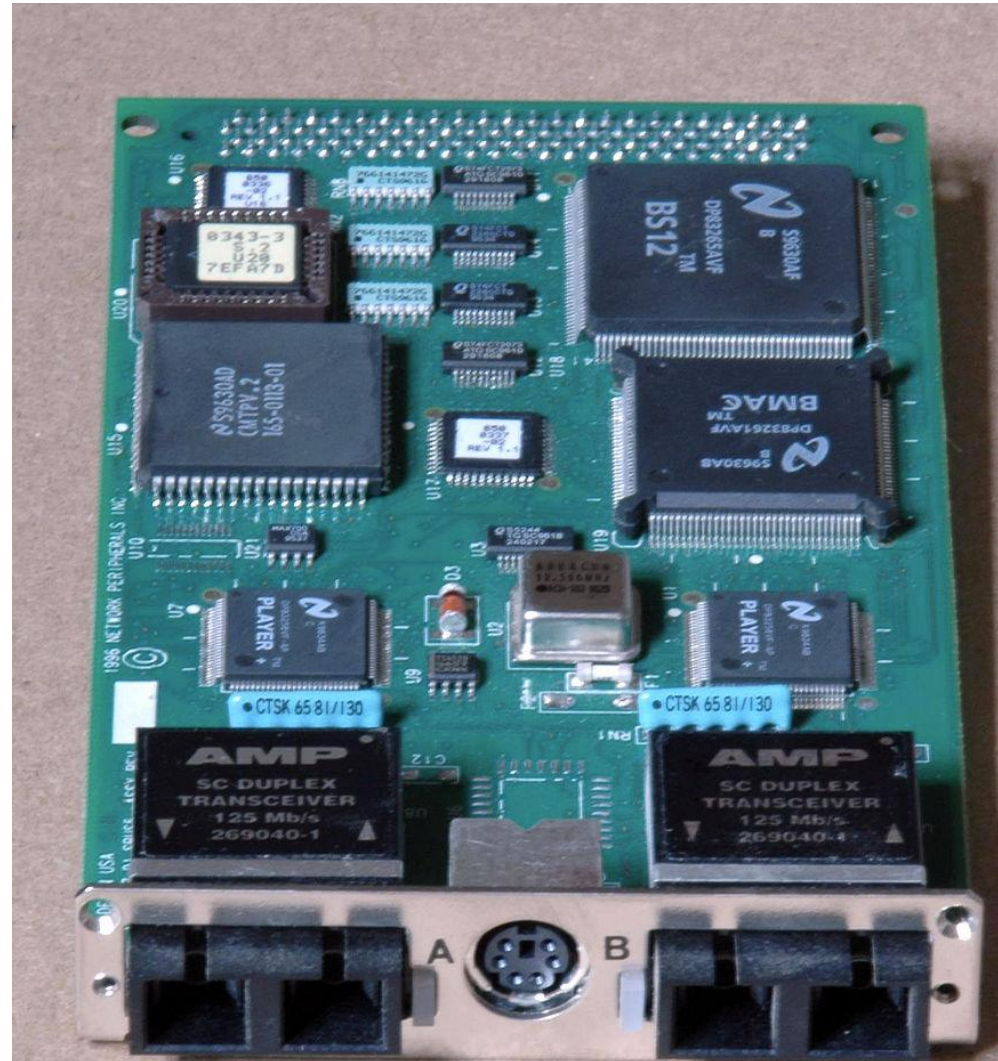

Contact

- ▶ Laboratorul de microunde si optoelectronica
- ▶ <http://rf-opto.etti.tuiasi.ro>
- ▶ rdamian@etti.tuiasi.ro