

# **Optoelectronică, structuri și tehnologii**

Curs 6  
2012/2013

# Orar


## ▶ Curs

- marti, 13–16, P7
- 2C  $\Rightarrow$  3C
  - $(14-4)*2/3 \approx 6.66$
  - $4+6.66 = \textcolor{red}{11} - 0.33$




# Fibra optică

Capitolul 5

# Recapitulare

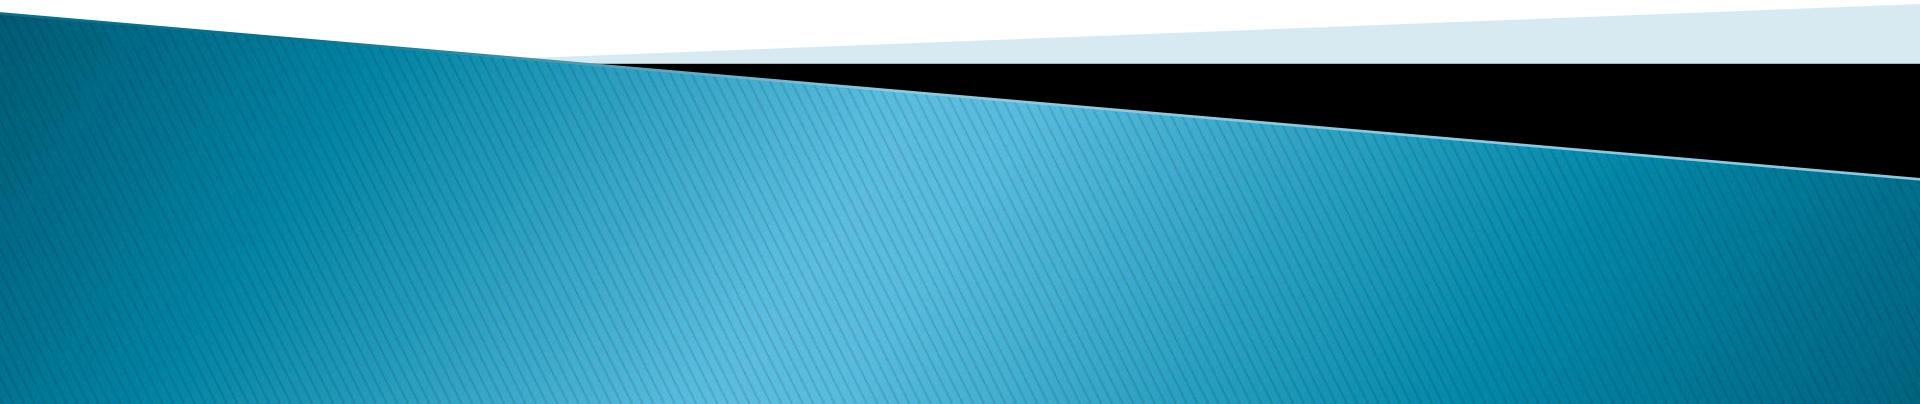


# Fibre

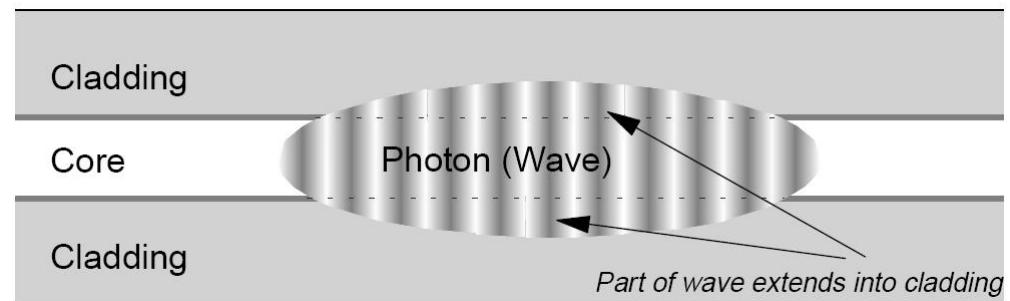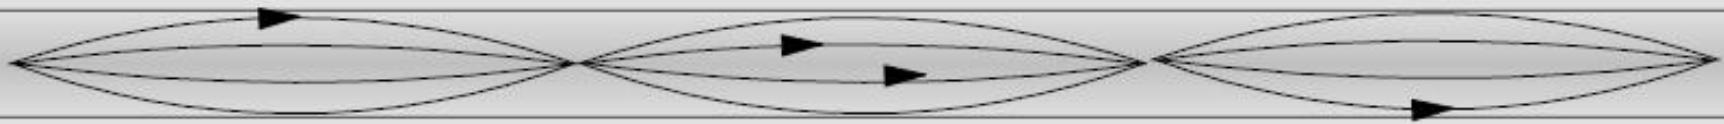


# Dispersia

- ▶ intermodala (modala – depinde de prezența modurilor)
- ▶ intramodala (cromatică – depinde de lungimea de undă)
  - de material
  - de ghid

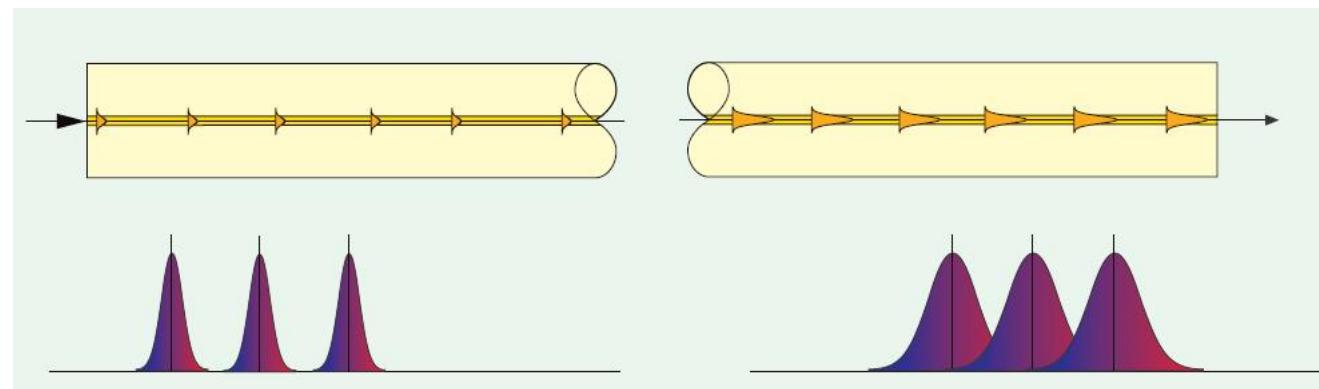


# Dispersia de material

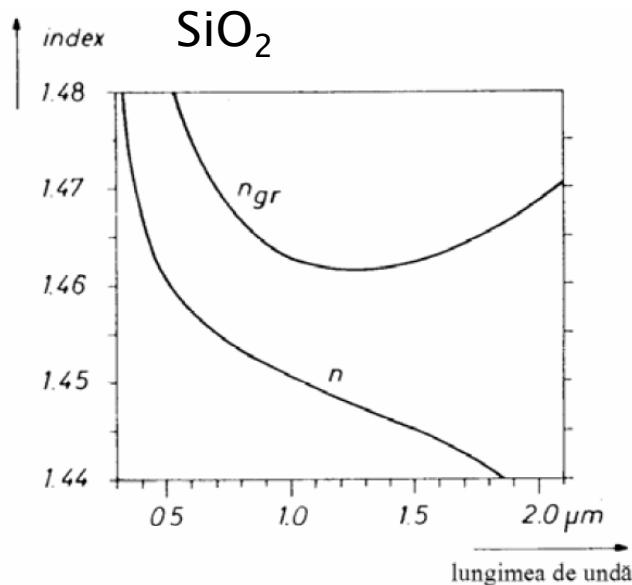


$$n_{gr} = n - \lambda \frac{dn}{d\lambda}$$

$$\Delta\tau_{mat} = \frac{L \cdot \lambda \cdot \Delta\lambda}{c} \cdot \frac{d^2n}{d\lambda^2}$$

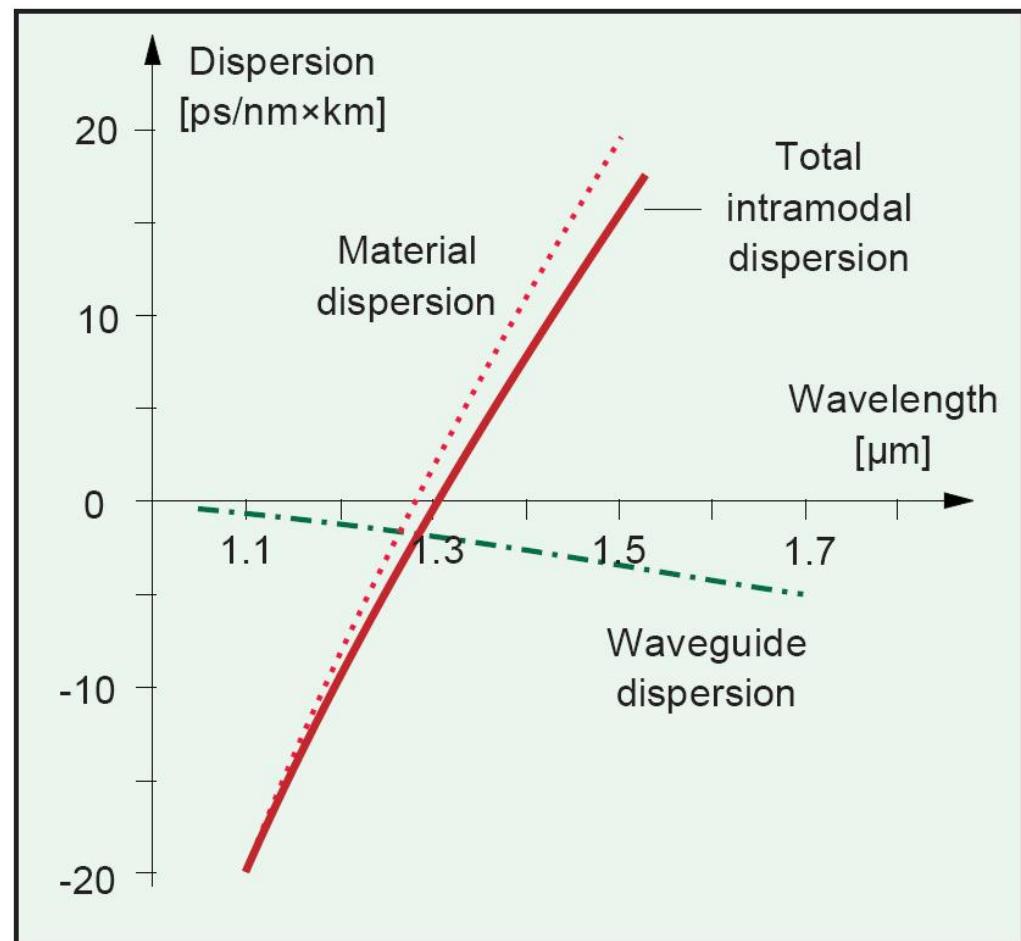

# Dispersia cromatica

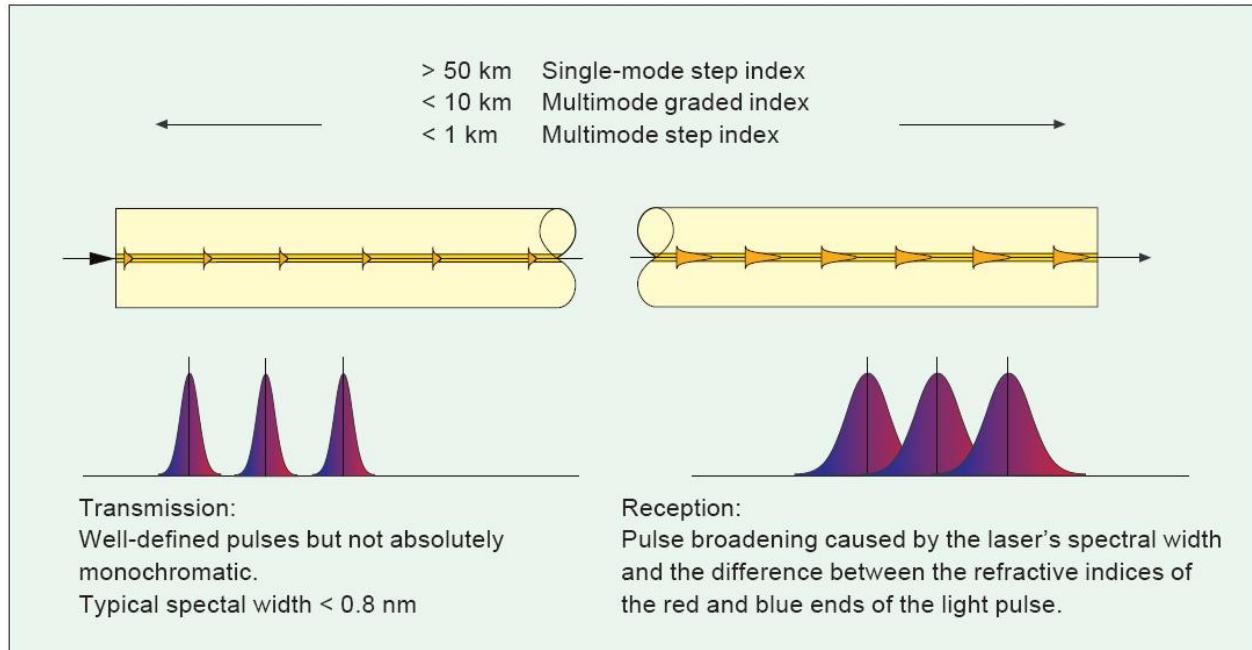


$$\Delta\tau_{cr} = D(\lambda) \cdot \Delta\lambda \cdot L$$

$$D(\lambda) = \frac{S_0}{4} \cdot \left( \lambda - \frac{\lambda_0^4}{\lambda^3} \right)$$



$S_0$  panta dispersiei –  
 $\text{ps}/\text{nm}^2/\text{km}$

- ▶  $D(\lambda) \approx 100 + 0.4 (850 - \lambda)$  [ps/nm/km]  
 pentru  $800 < \lambda < 900$  nm
- ▶  $D(\lambda) \leq 3,5$  ps/nm/km  
 pentru  $1285 < \lambda < 1330$  nm       $D(\lambda) = \frac{S_0}{4} \cdot \left( \lambda - \frac{\lambda_0^4}{\lambda^3} \right)$
- ▶  $D(\lambda) \leq 17$  ps/nm/km  
 pentru  $1525 < \lambda < 1575$  nm

# Calitatea spectrală a emițătorilor optici

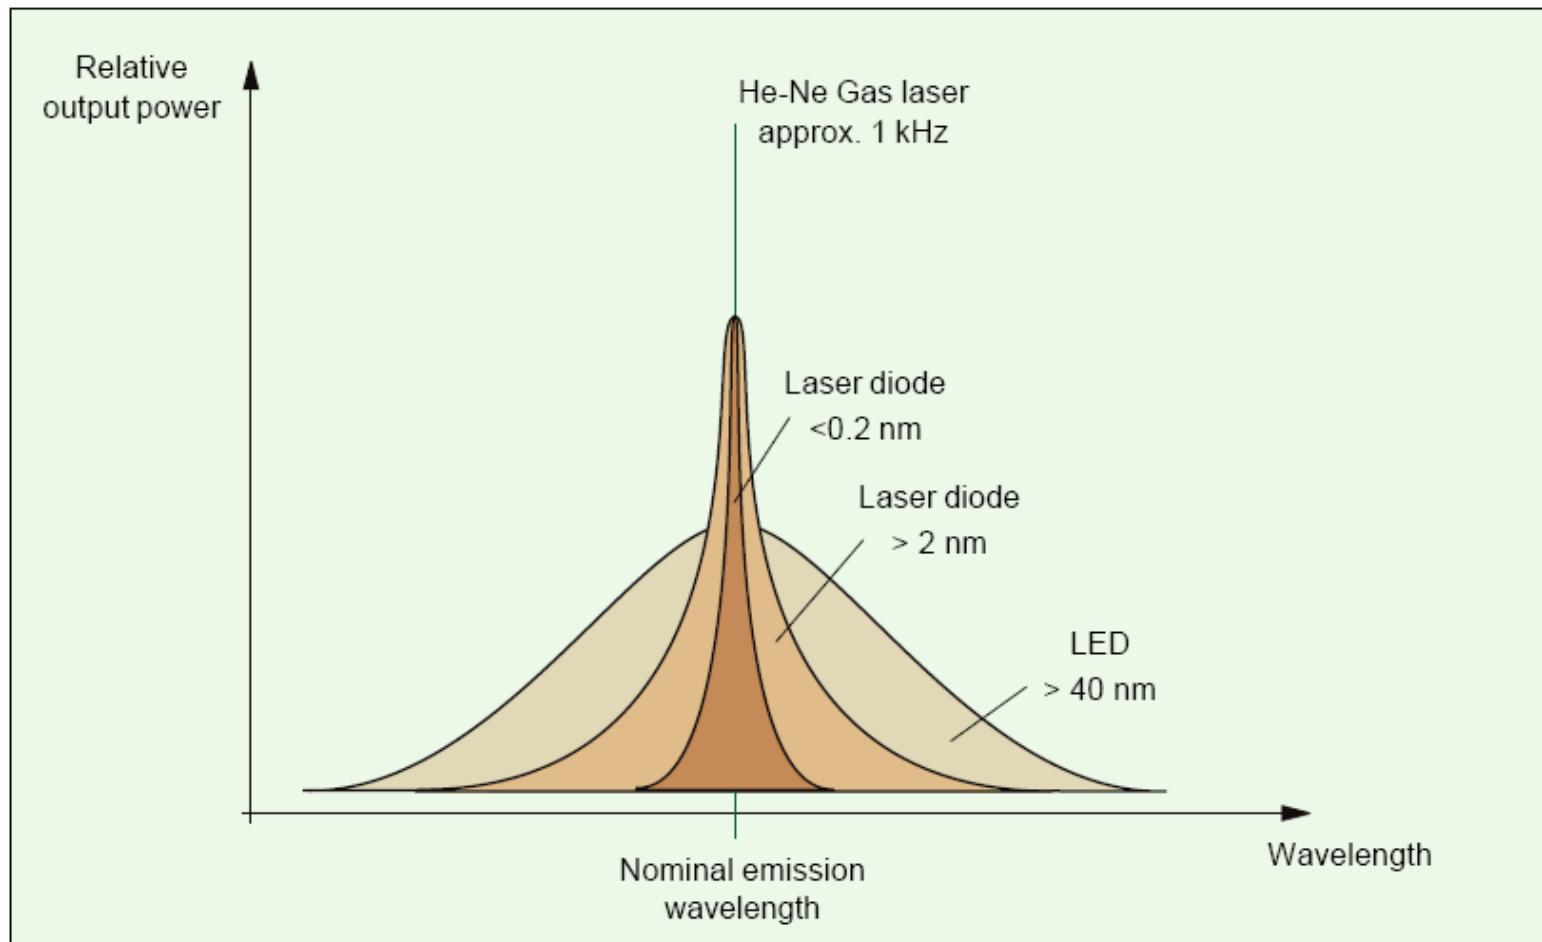


# He-Ne Laser

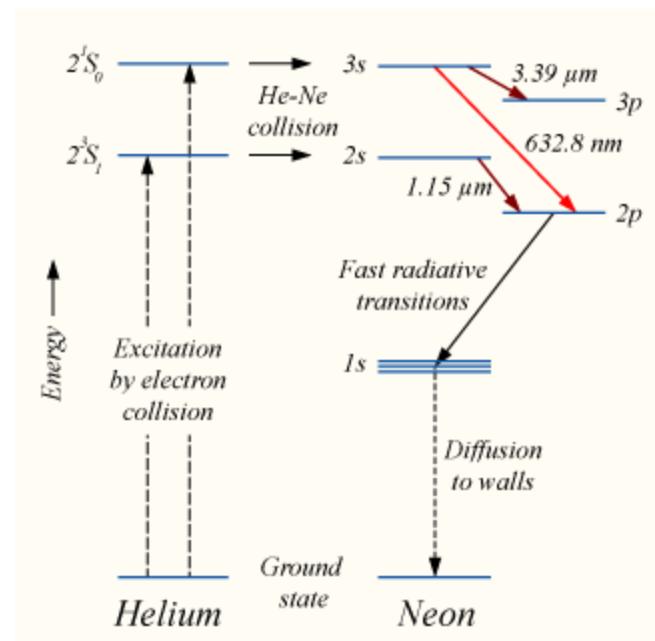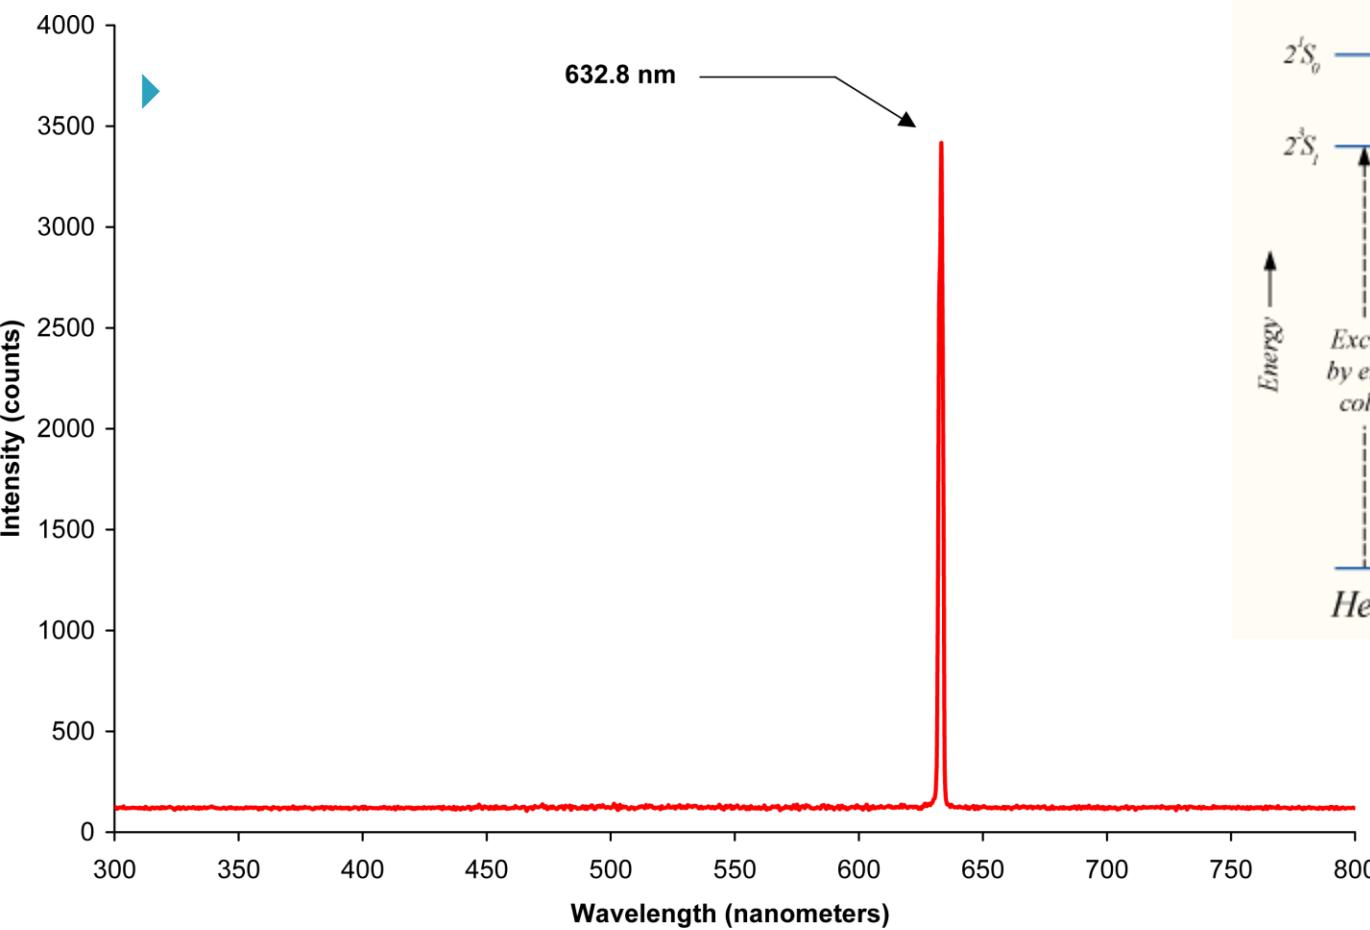


$$\Delta\lambda = 0.002 \text{ nm}$$

# Non-zero Dispersion shifted fibers

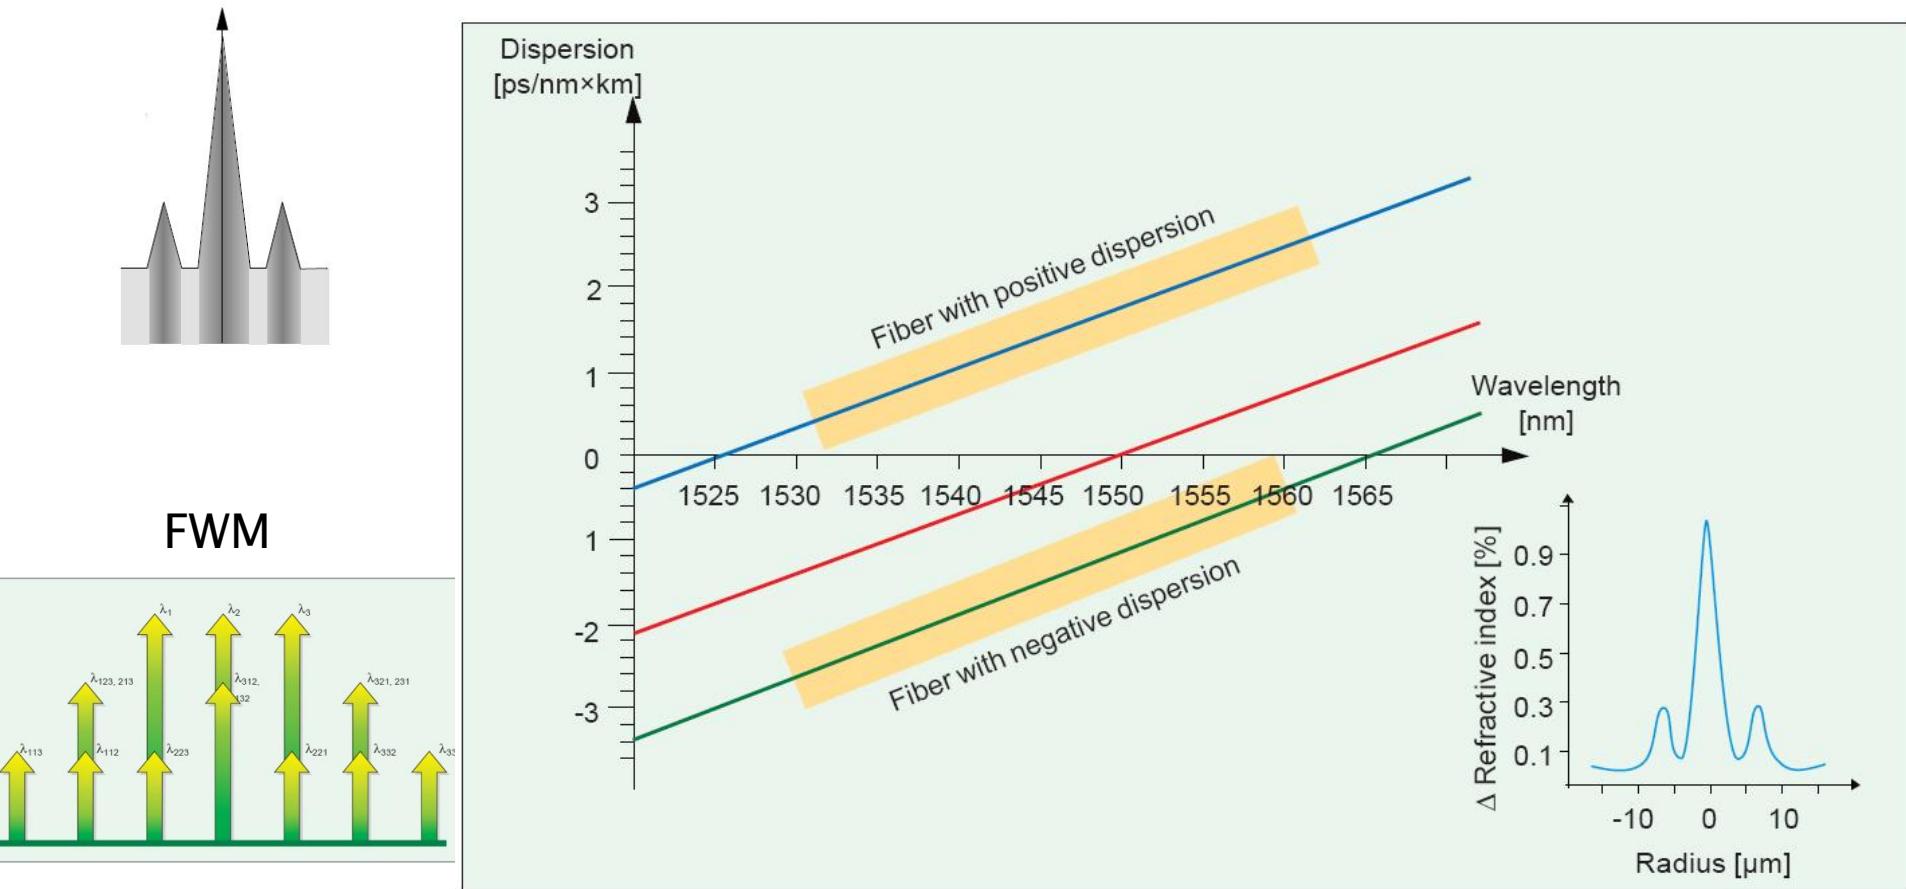


# Continuare

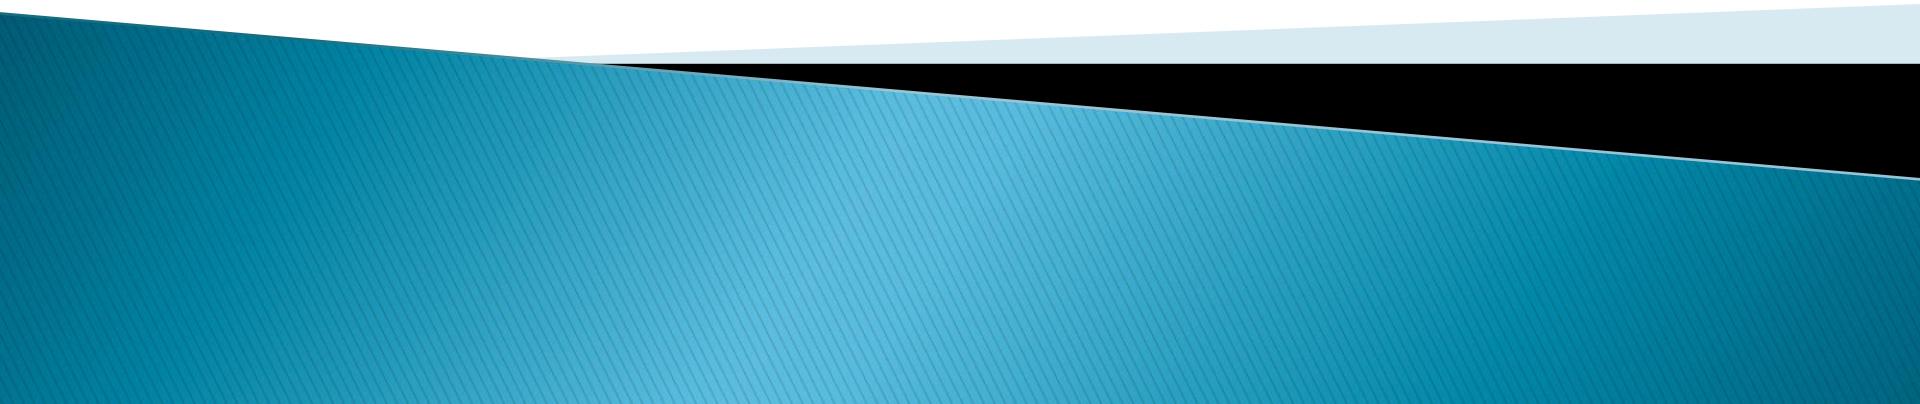

# Dispersie exemplu - 1


- ▶ transmisii cu viteze diferite

$$\Delta\tau_{cr} = D(\lambda) \cdot \Delta\lambda \cdot L$$

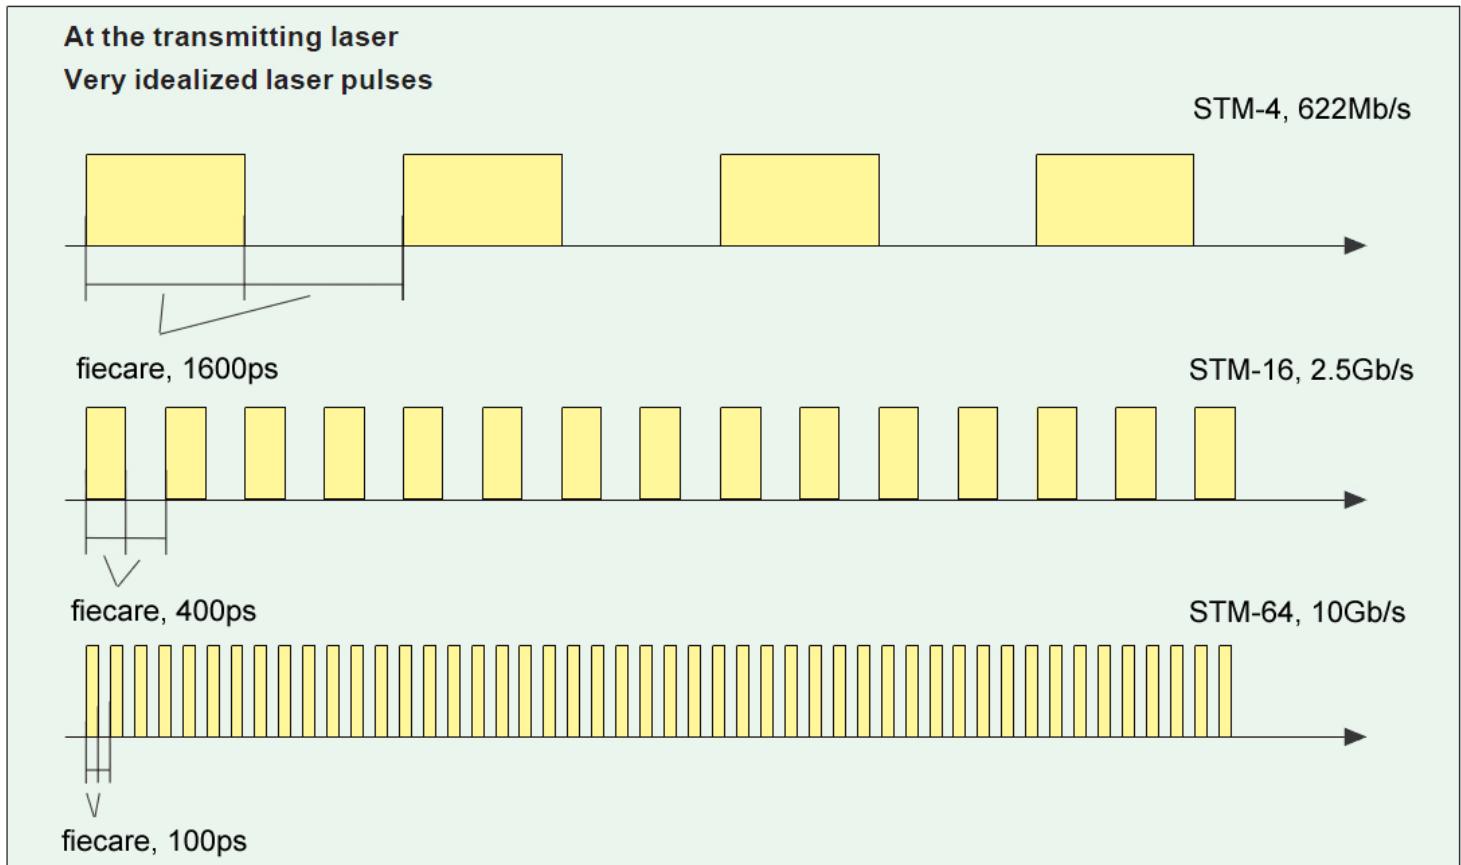

# Dispersie exemplu - 2

- ▶ 1550nm
- ▶ Efectul sursei
  - fibra monomod cu dispersia 16ps/nm/km@1550
  - latimea spectrală a sursei  $\Delta\lambda=1\text{ nm}$
  - 50km

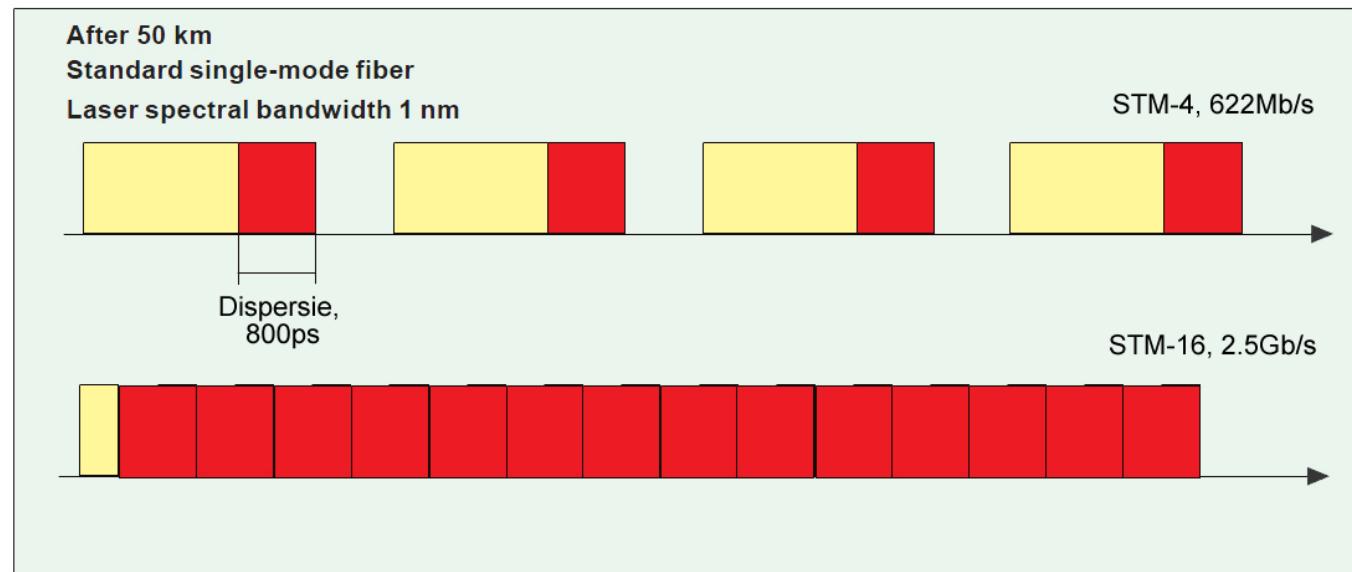


100<400<800<1600

# Dispersie exemplu – 3

- ▶ 1550nm
- ▶ Efectul sursei
  - fibra monomod cu dispersia  $16\text{ps/nm/km}$ @1550
  - latimea spectrală a sursei  $\Delta\lambda=0.1\text{nm}$
  - 50km

$$\Delta\tau_{cr} = D(\lambda) \cdot \Delta\lambda \cdot L$$

$$\Delta\tau_{cr} = 16 \cdot 0.1 \cdot 50\text{ps} = 80\text{ps}$$

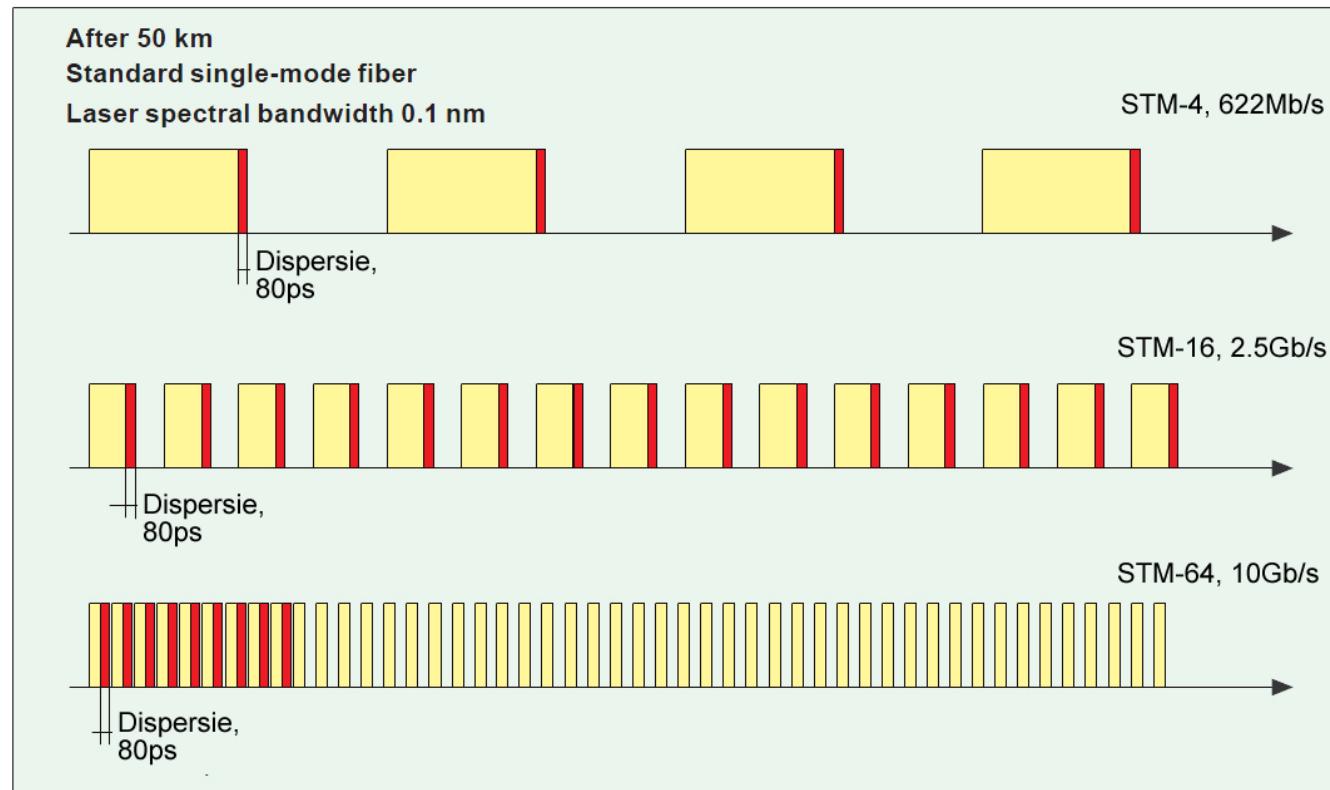

$100 \approx 80 < 400 < 1600$


# Dispersie exemplu - 4

## Efectul fibrei

- fibra cu dipersie deplasata:  $4\text{ps/nm/km}$ @1550
- latimea spectrală a sursei  $\Delta\lambda=0.1\text{nm}$
- 50km

$$\Delta\tau_{cr} = D(\lambda) \cdot \Delta\lambda \cdot L$$

$$\Delta\tau_{cr} = 4 \cdot 0.1 \cdot 50 \text{ps} = 20 \text{ps}$$

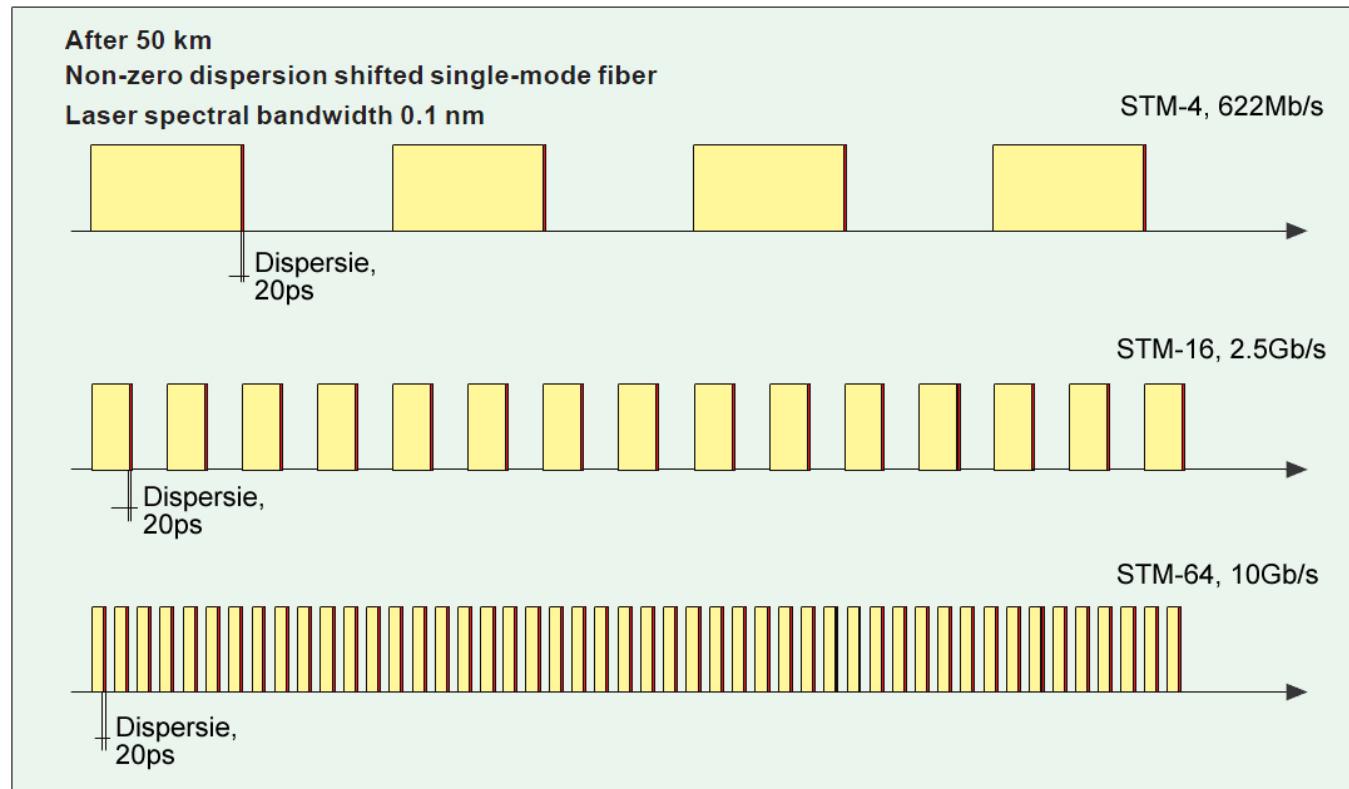

20<100<400<1600


# Dispersie exemplu – 5

## ► Efectul fibrei

- fibra cu dipersie deplasata:  $4\text{ps/nm/km}$ @1550
- latimea spectrală a sursei  $\Delta\lambda=0.1\text{nm}$
- 150km

$$\Delta\tau_{cr} = D(\lambda) \cdot \Delta\lambda \cdot L$$

$$\Delta\tau_{cr} = 4 \cdot 0.1 \cdot 150 \text{ ps} = 60 \text{ ps}$$

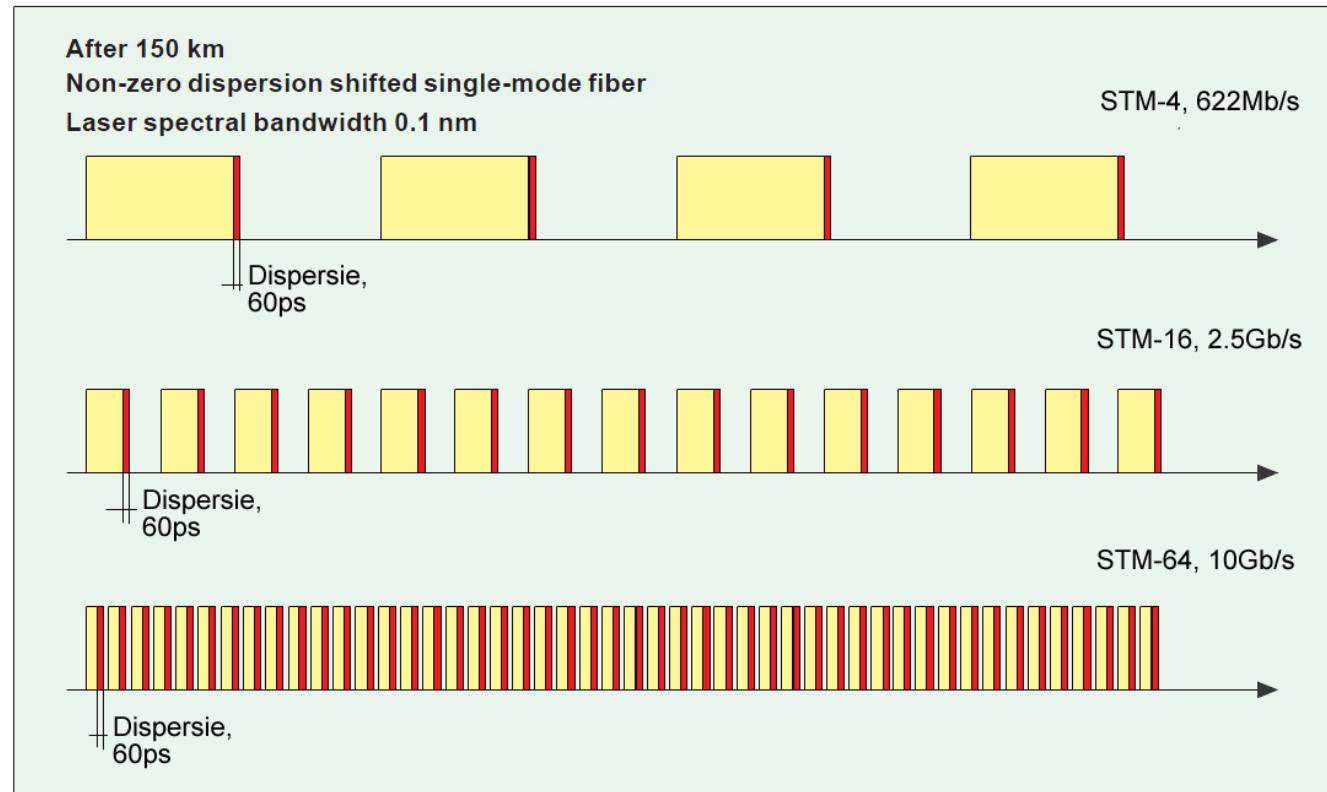

60<100<400<1600

# ATENUAREA

- ▶ Macrocurburi
- ▶ Microcurburi
- ▶ Imprastiere
- ▶ Absorbtie

$$\text{Pierderi} = \frac{P_{out}}{P_{in}}$$

$$\text{Pierderi [dB]} = [-] 10 \cdot \log_{10} \left( \frac{P_{out}}{P_{in}} \right)$$

$$\text{Pierderi [dB]} = [-] (P_{out} [\text{dBm}] - P_{in} [\text{dBm}])$$



$$\text{Atenuare [dB/km]} = \frac{\text{Pierderi [dB]}}{\text{lungime [km]}}$$

# **Fibra optică – Tehnologie**

**Capitolul 6**


# OTDR

- ▶ Optical time-domain reflectometer
- ▶ Localizarea defectelor

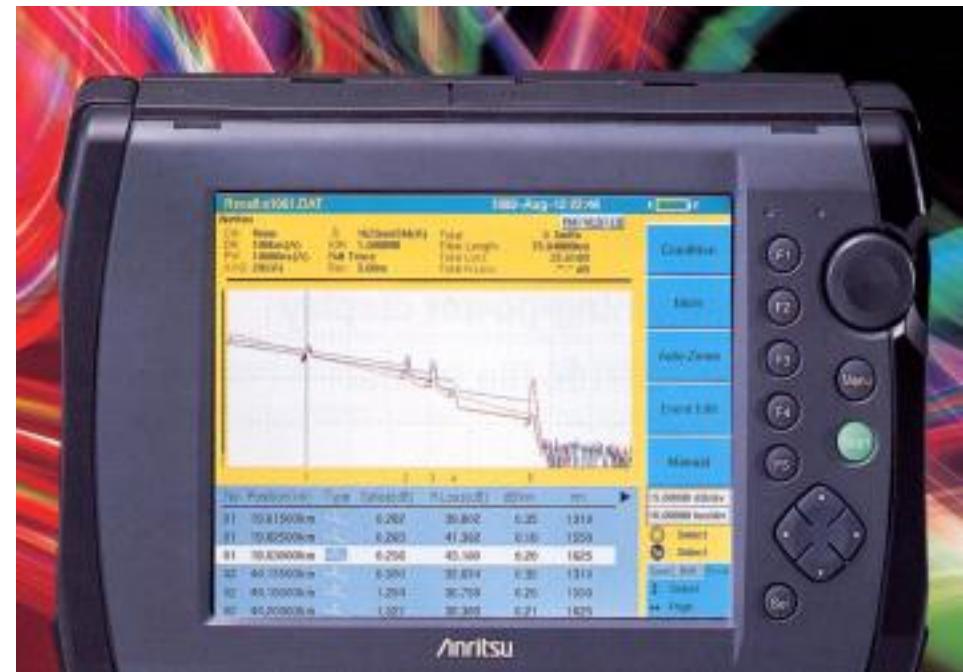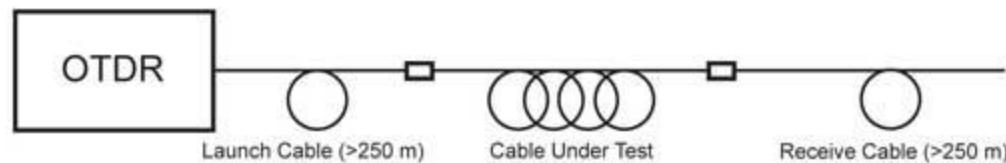


# OTDR


- ▶ Optical time-domain reflectometer
- ▶ Localizarea defectelor

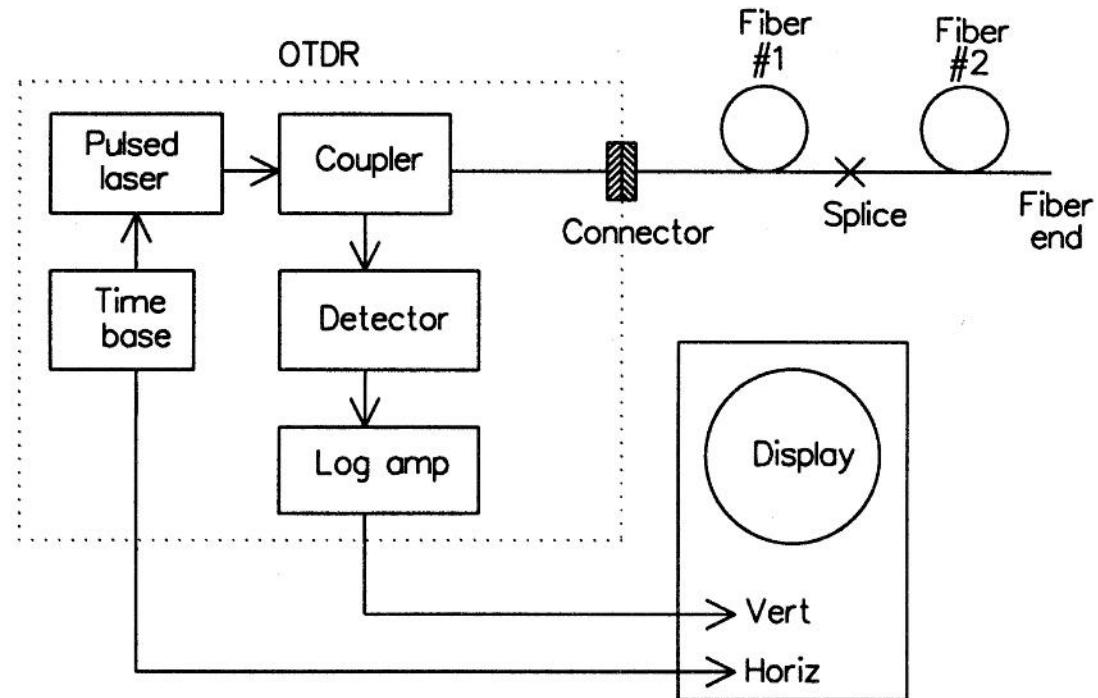


# Rezultat grafic al OTDR

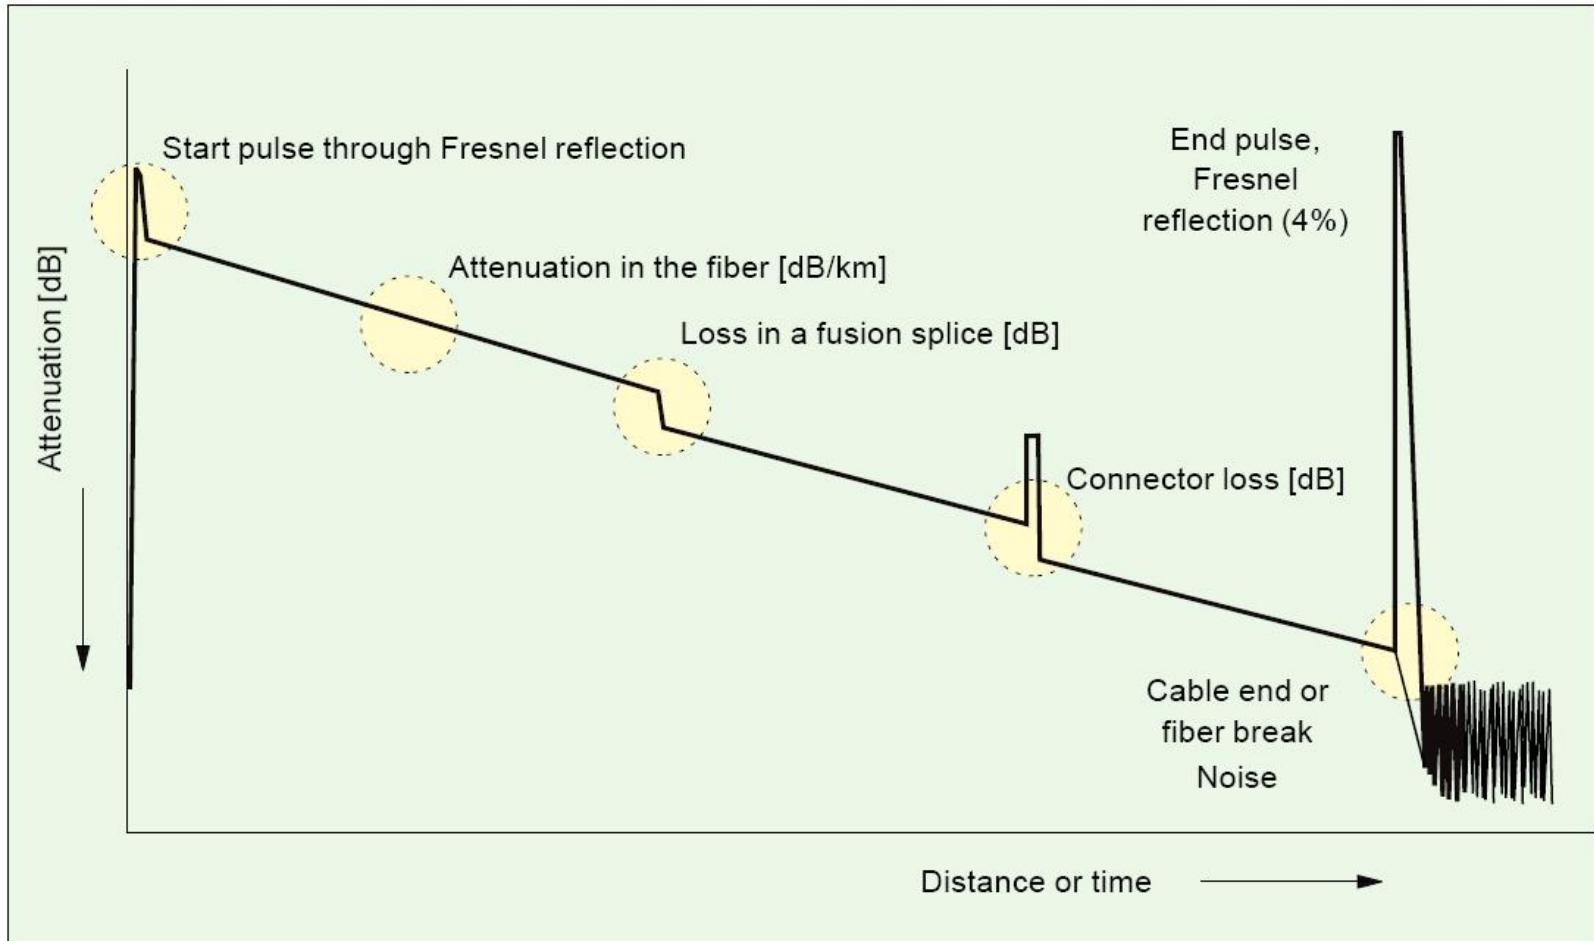

# Efecte vizibile OTDR

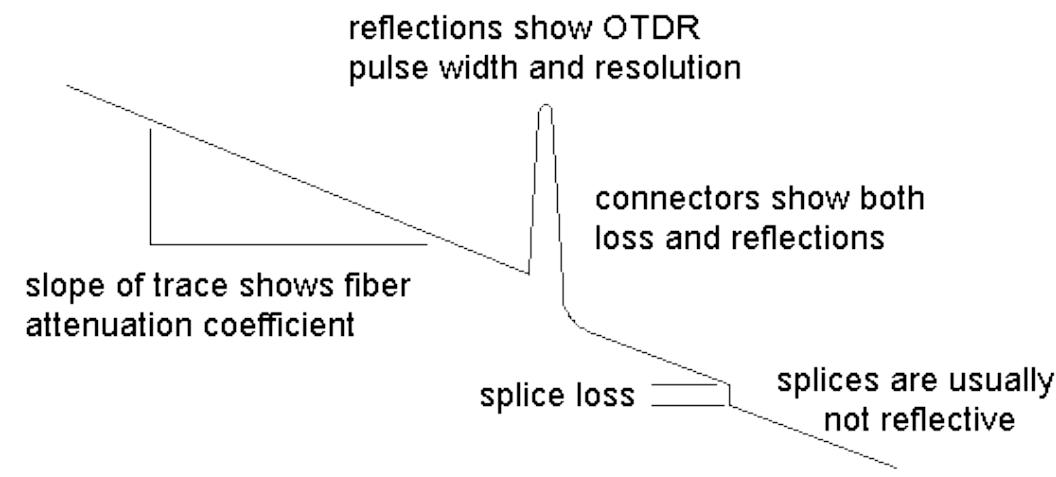


$$Spliceloss = \frac{Spliceloss_{A \rightarrow B} + Spliceloss_{B \rightarrow A}}{2}$$

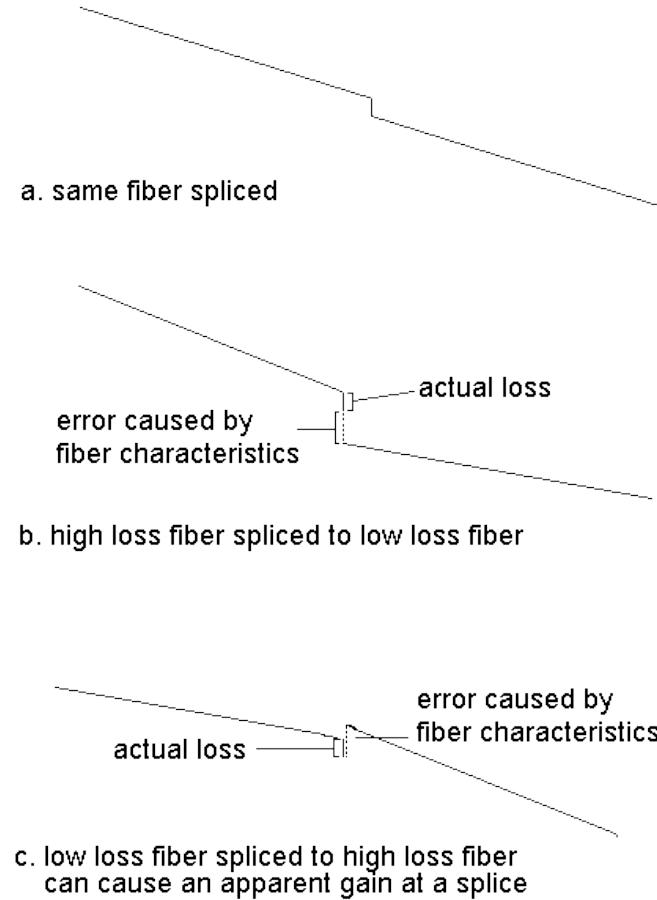

# Stabilized light source



## Optical power meter

- ▶ Masurarea puterii si atenuarii

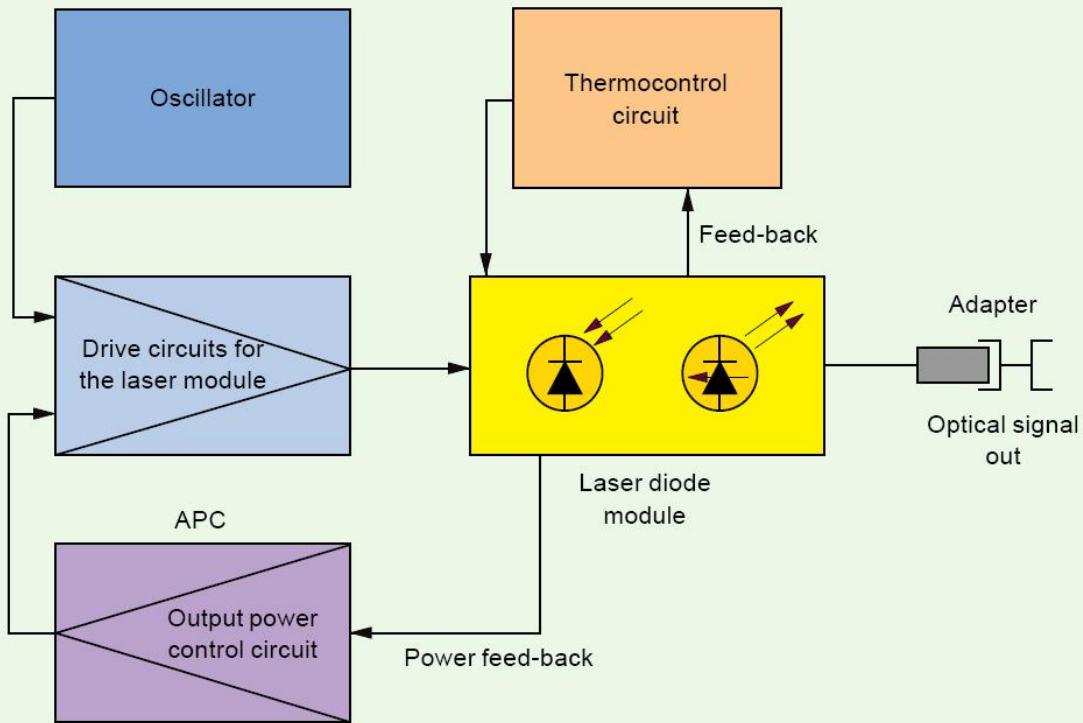

# Taiere - Cleaving



- ▶ Tehnici necesare pentru a asigura o taiere perpendiculara pe axa fibrei

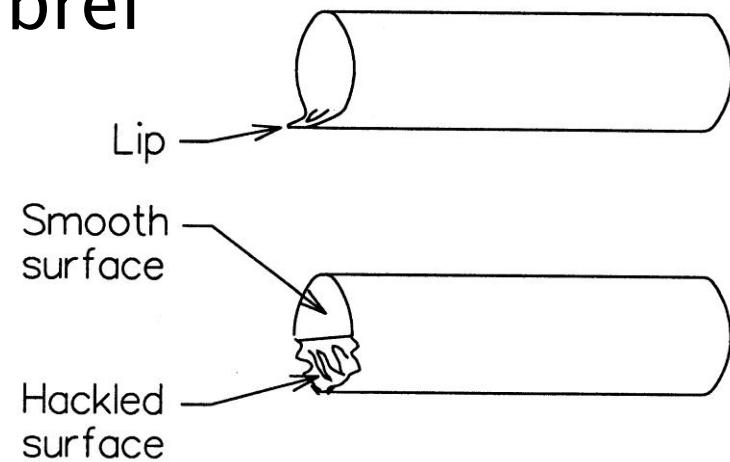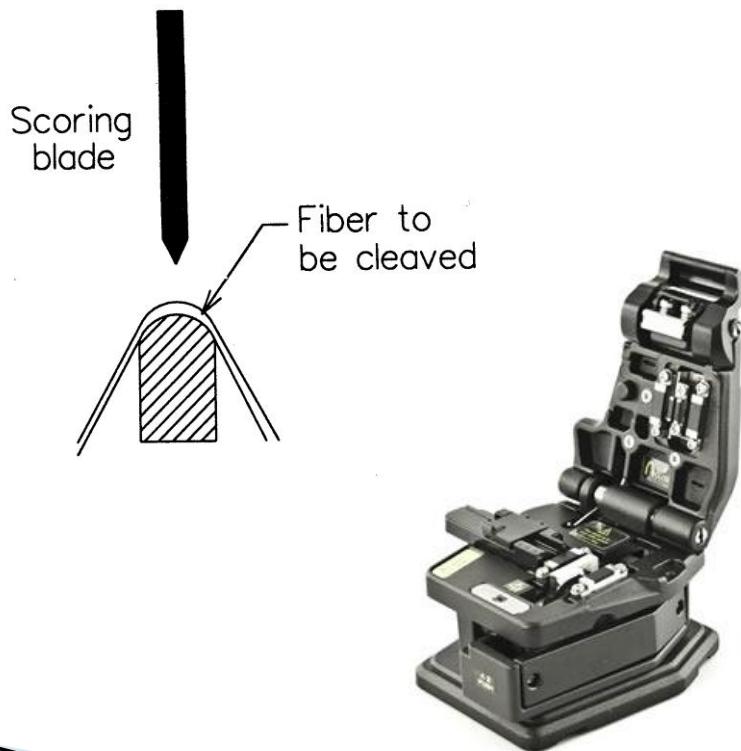


# Lipire prin fuziune






# Splice prin fuziune

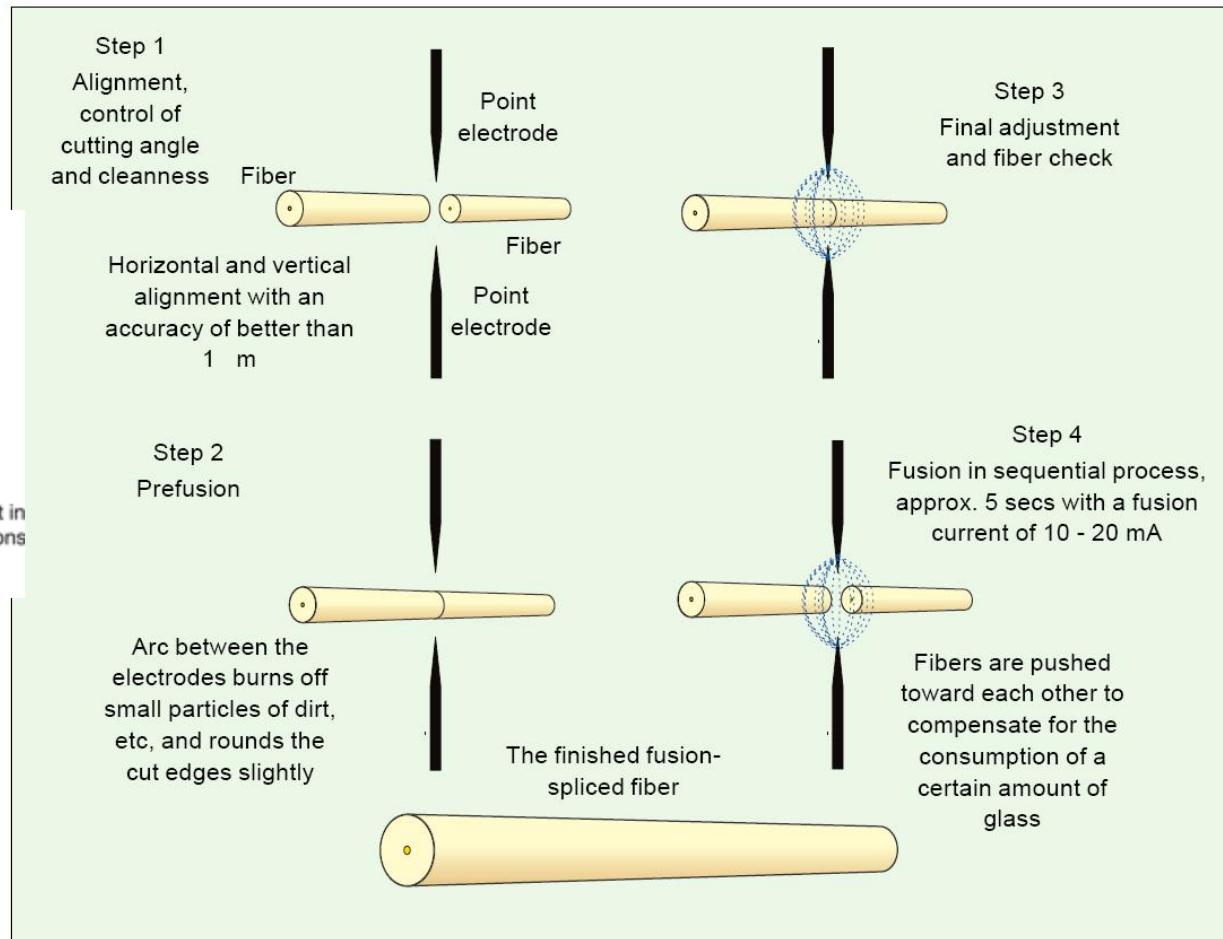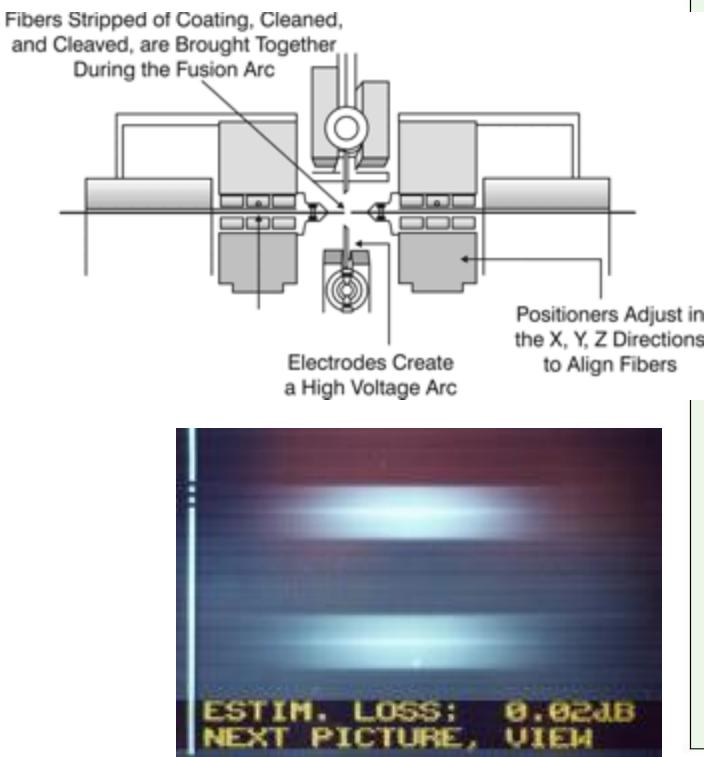


# Splice prin fuziune

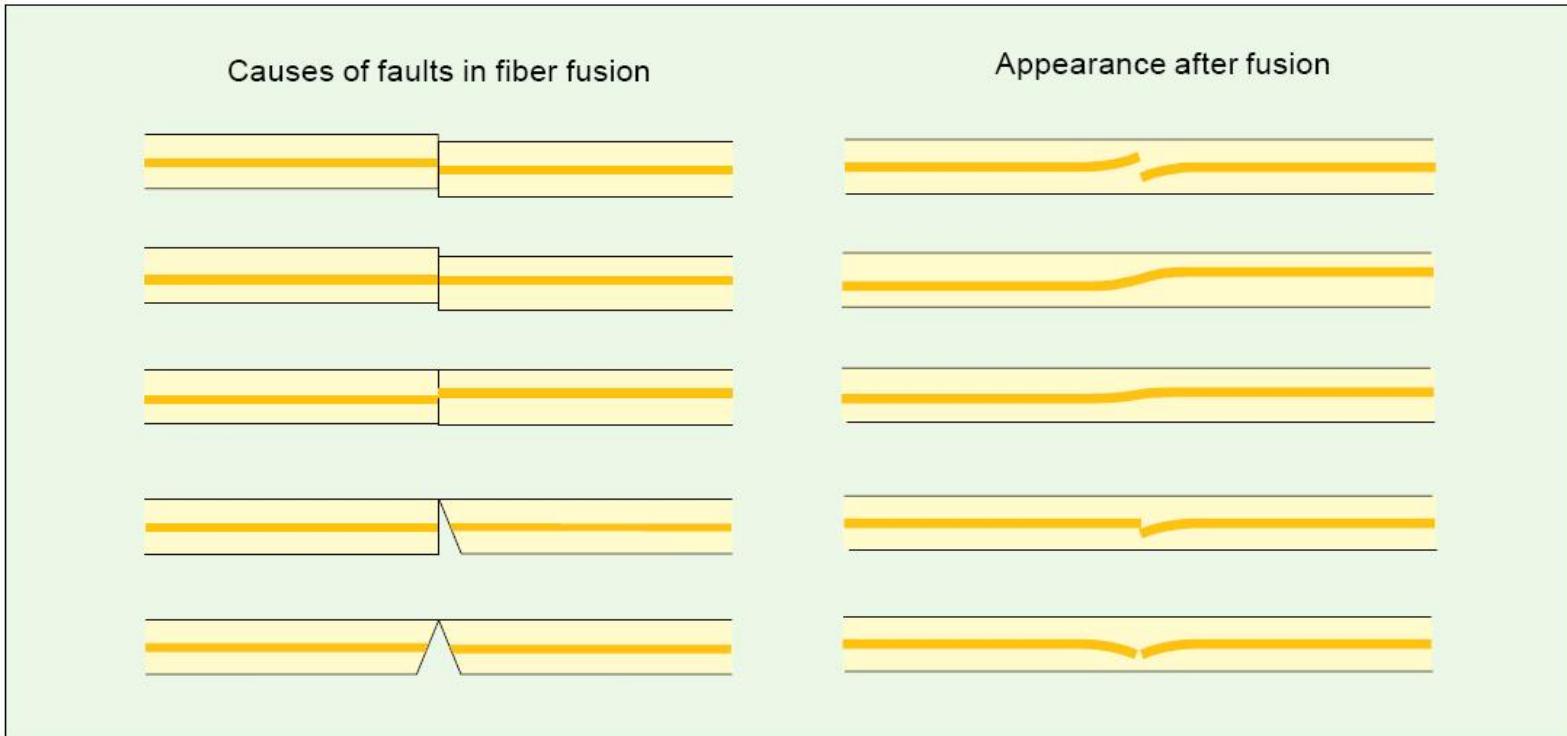



# Splice mechanic - bloc V

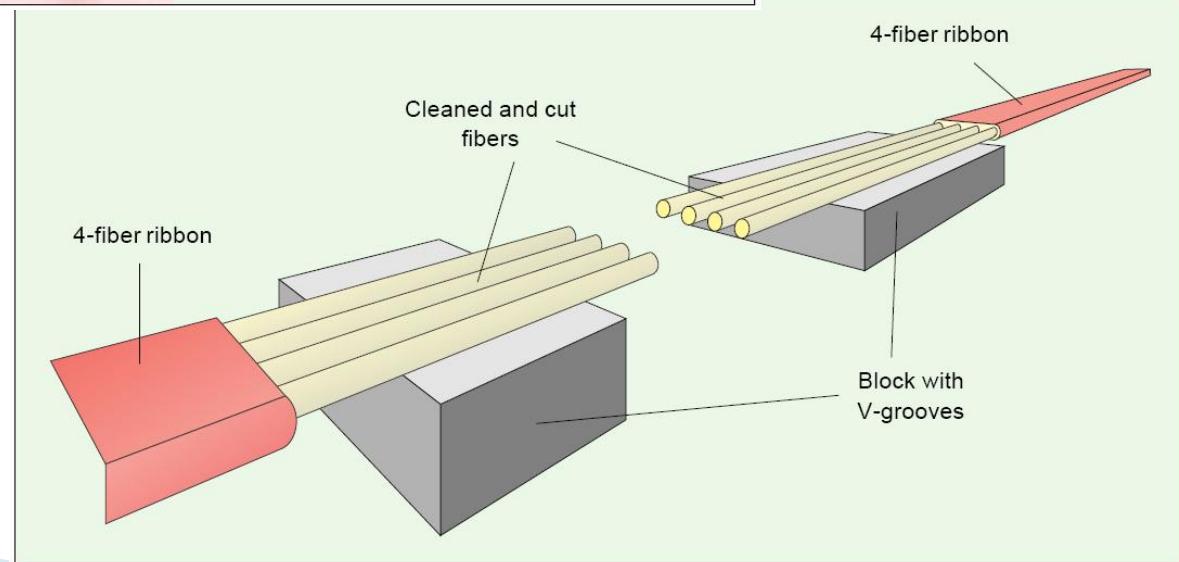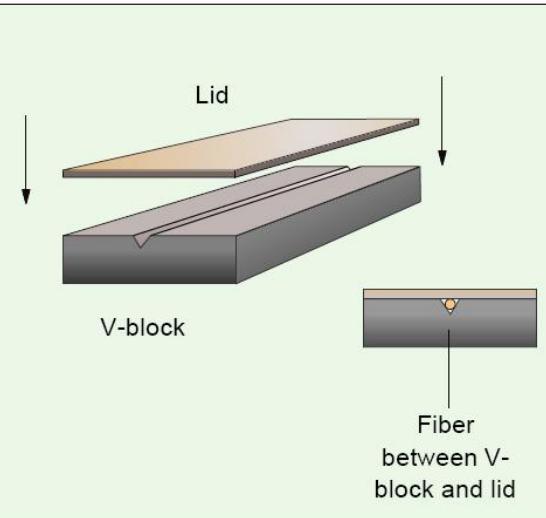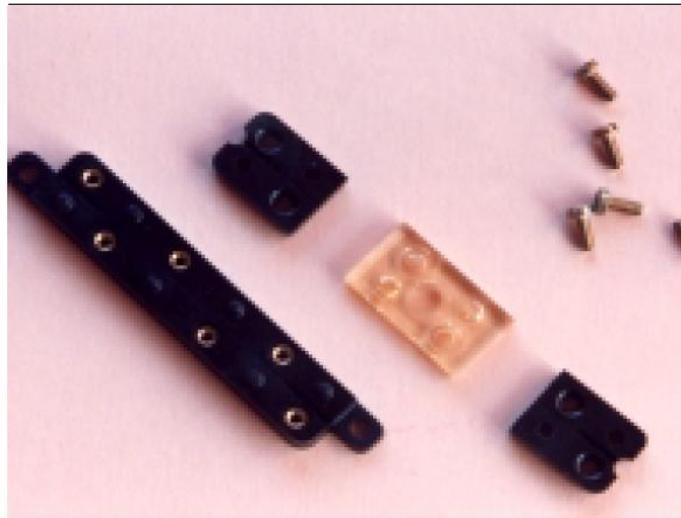

# Splice mechanic - bloc V

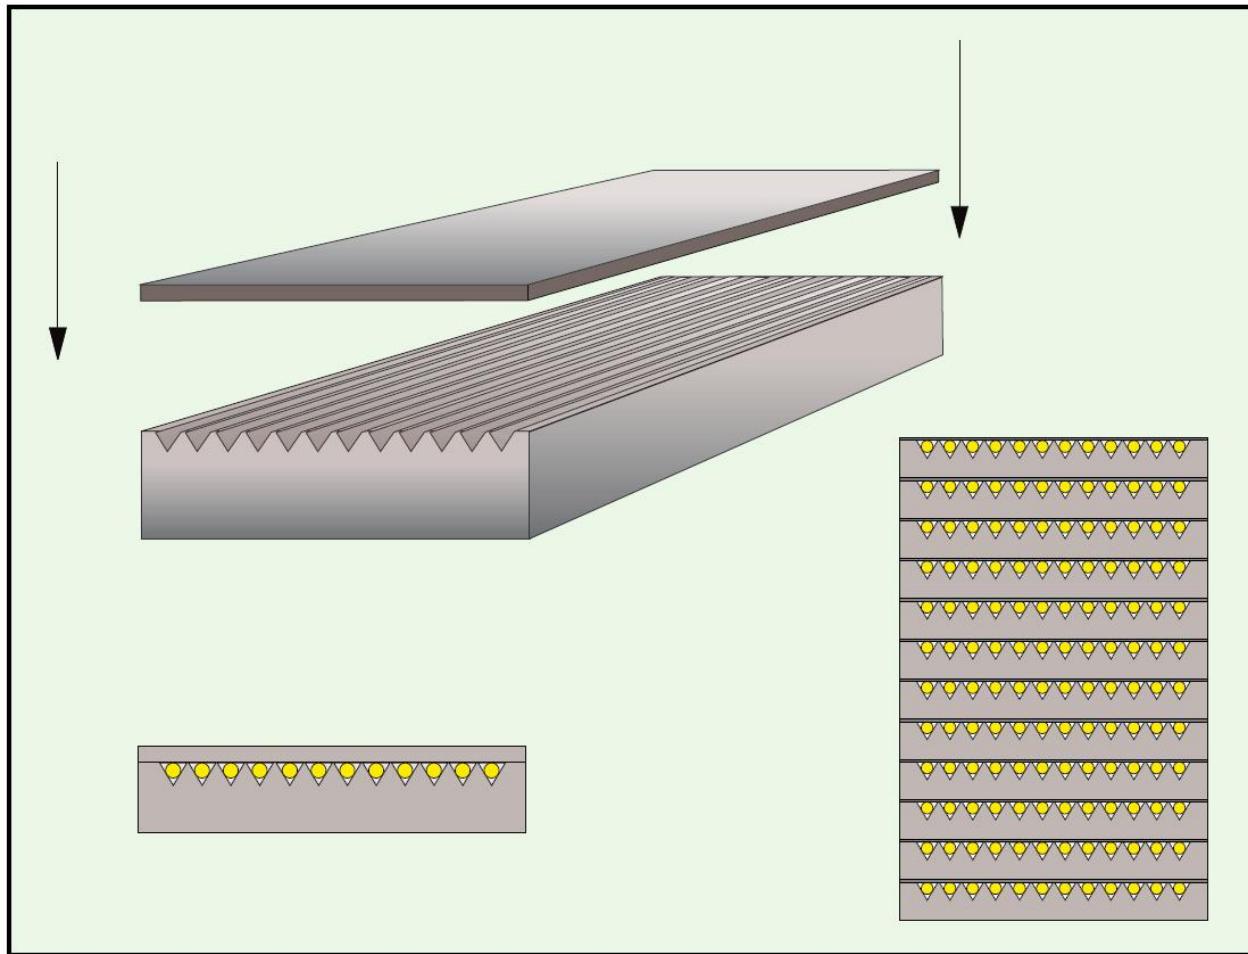


# Splice mechanic

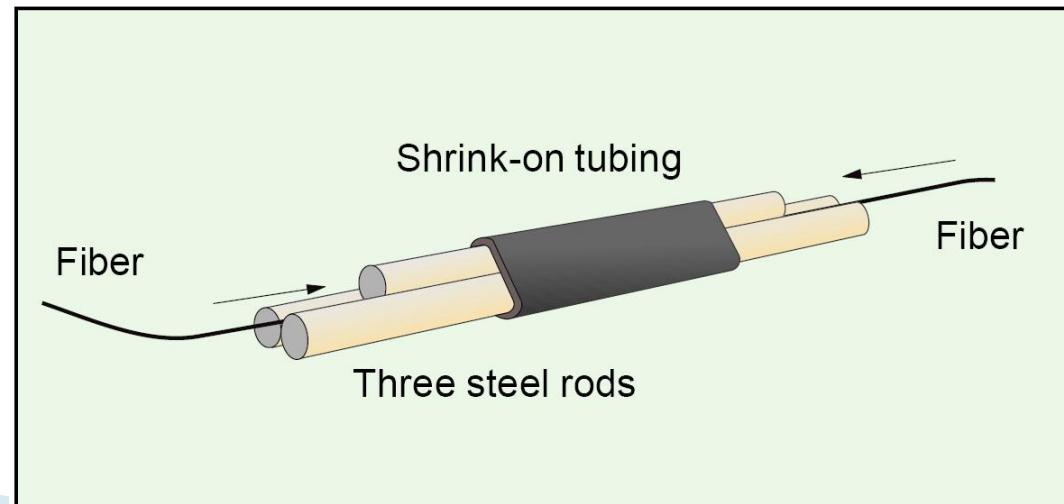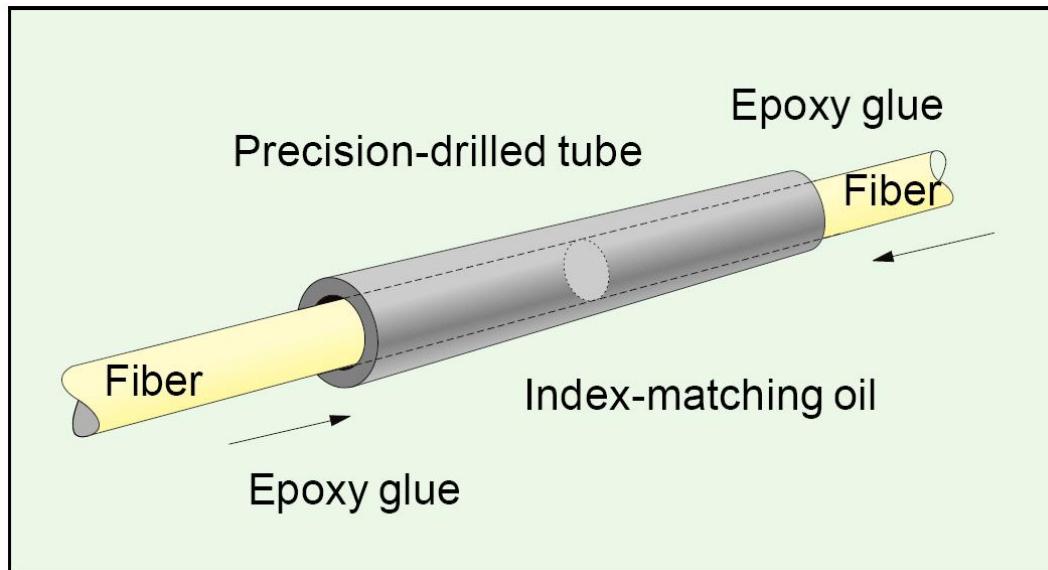

# Probleme Fibre/Conectori


Offset



Angular  
Misalignment



Separation




Core Eccentricity





Core Ellipticity






Reflections &  
Interference

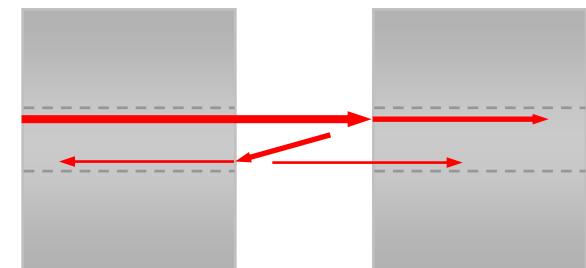


# Cabluri

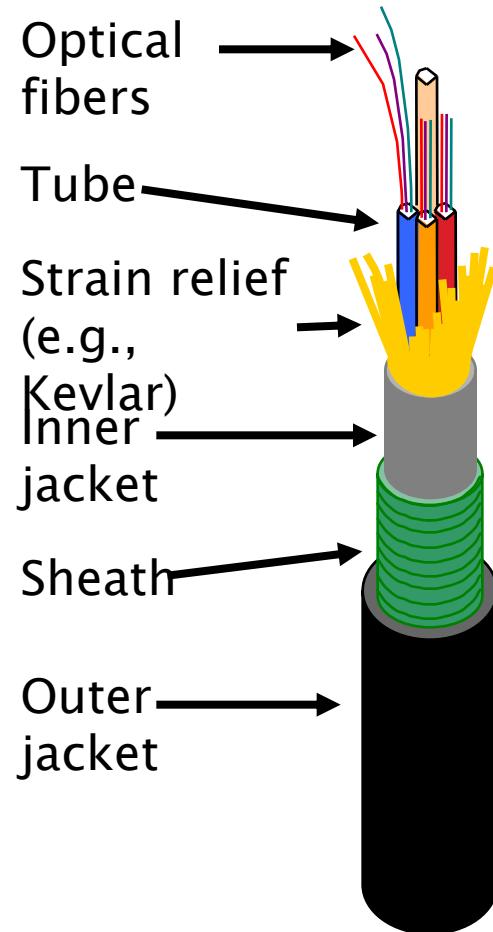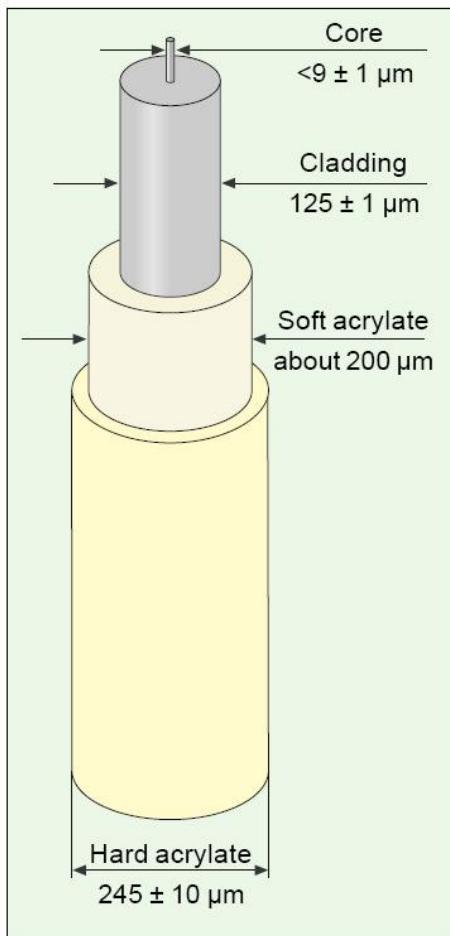


# Cabluri

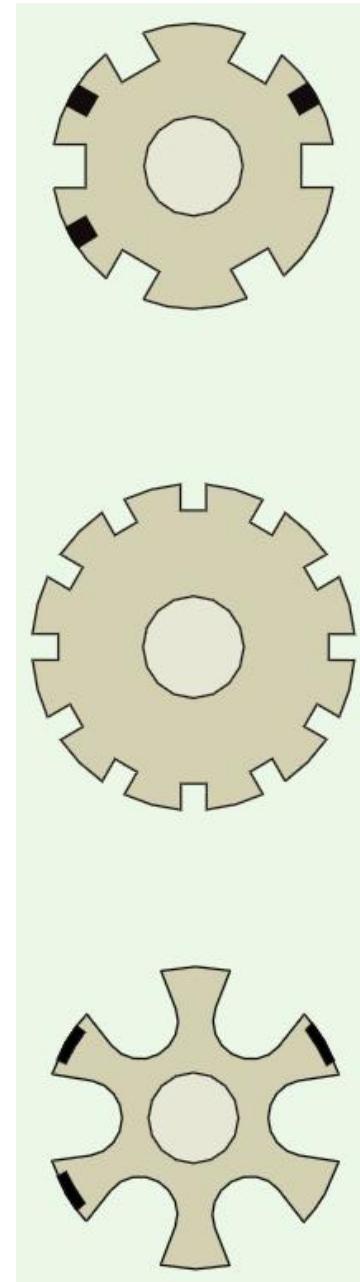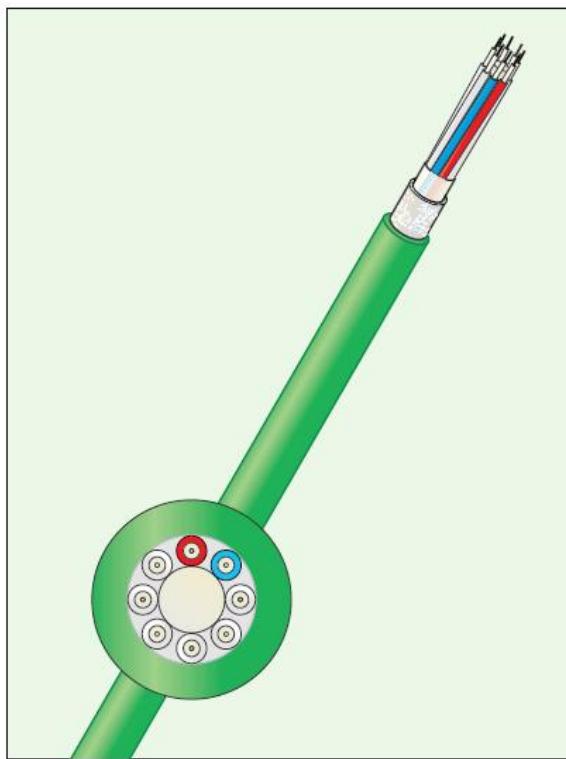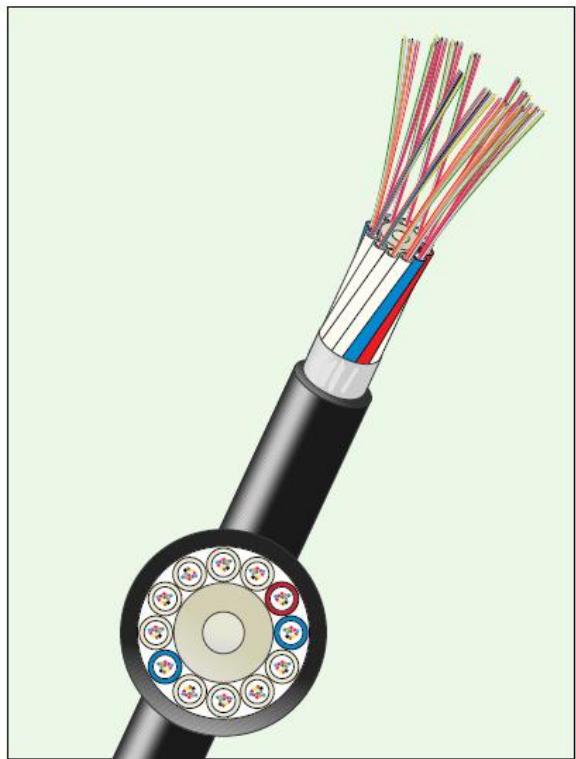




# Cabluri

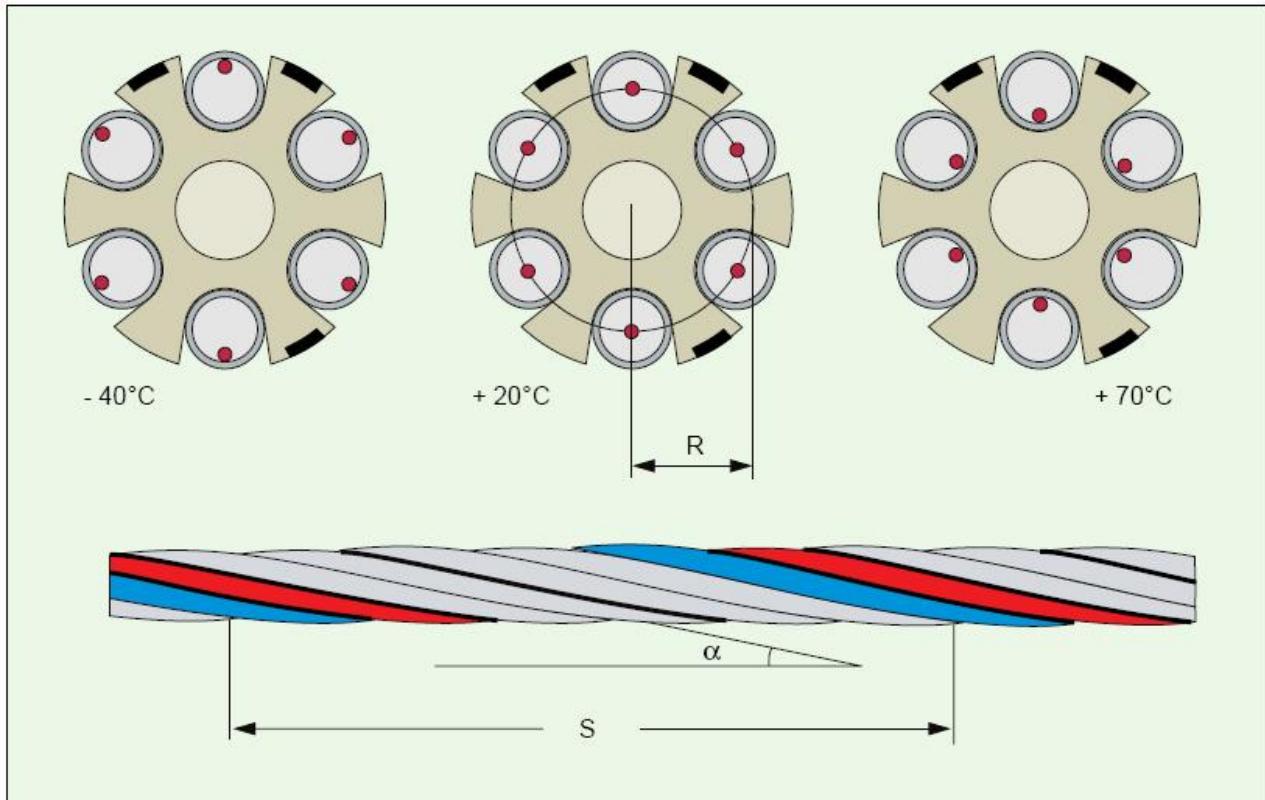

$$L = s \sqrt{1 + \left( \frac{2\pi R}{s} \right)^2}$$

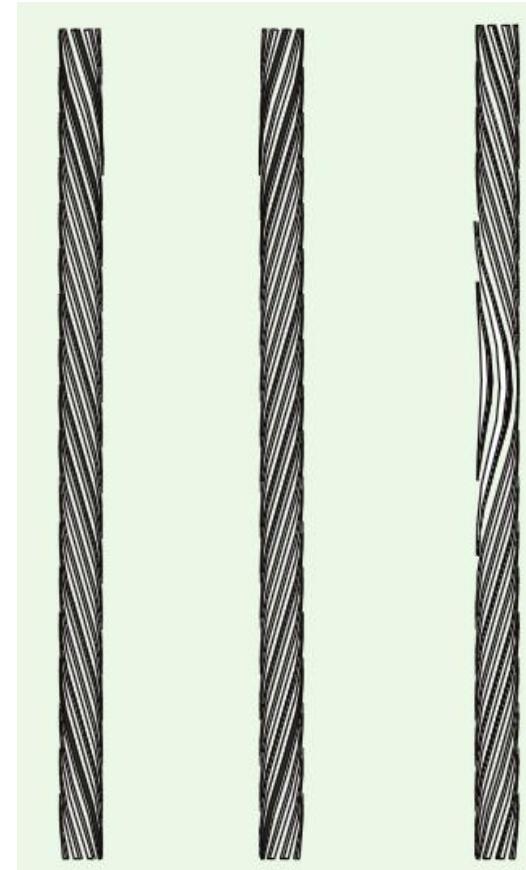

# Cabluri

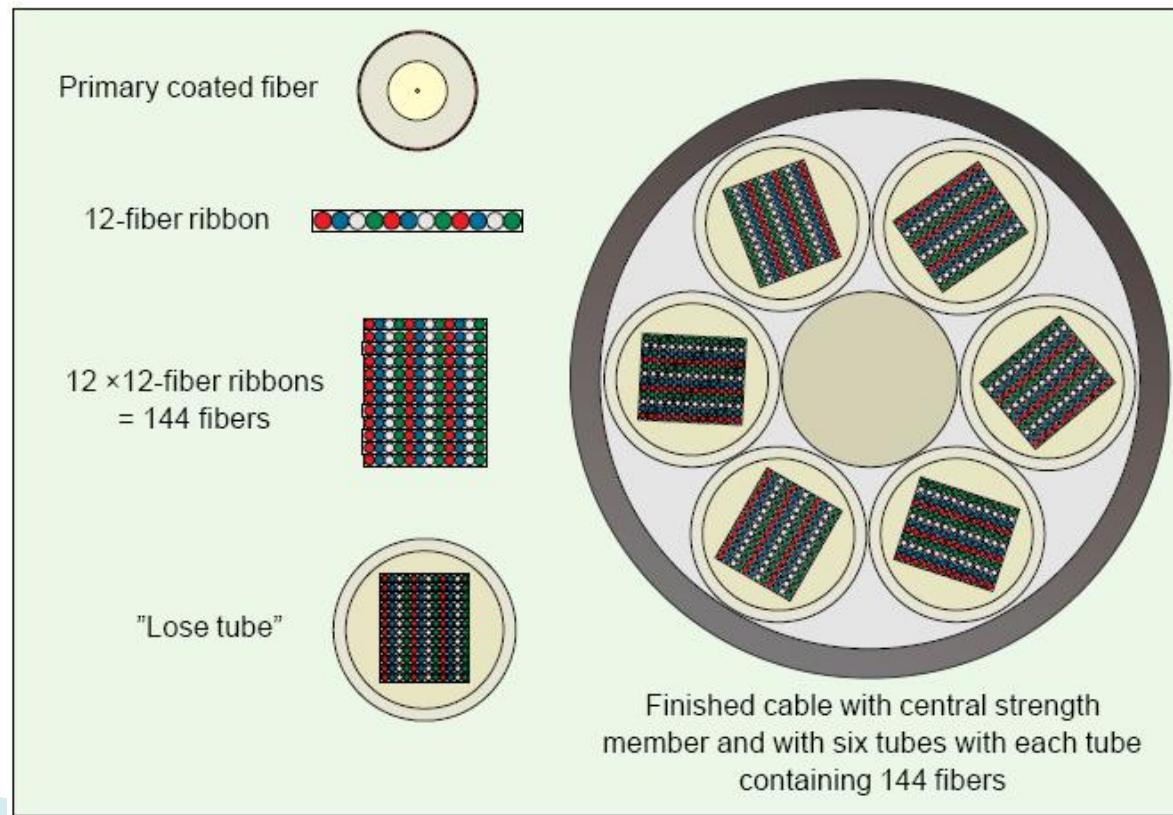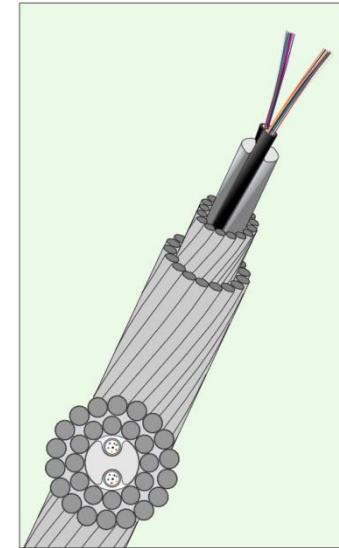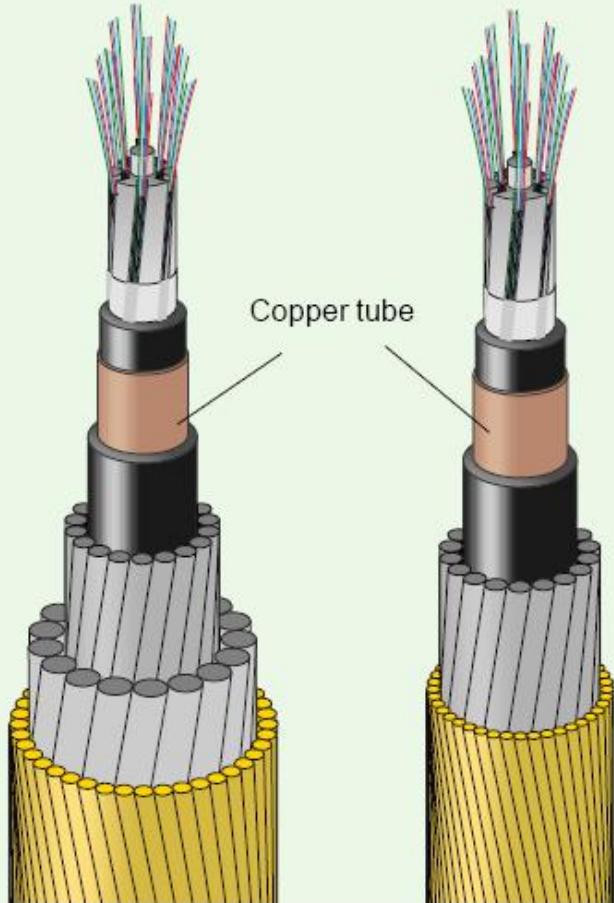


# Conecatori




# Conectori



**FC connector**

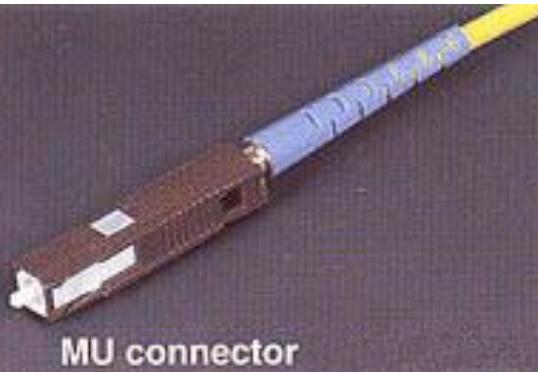

**MU connector**

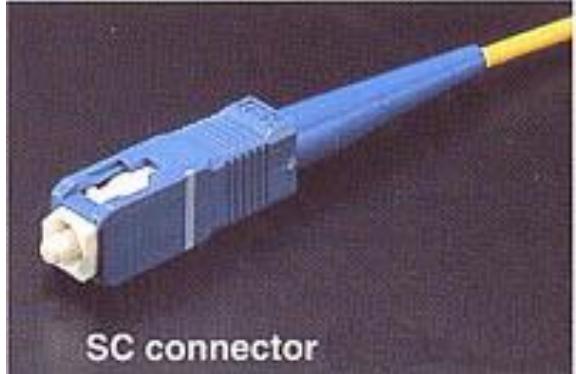

**SC connector**




**ST connector**




**ST**




**SMA Type 906**



**FC**



**SC**



**MIC**



**Fiber Jack**



**MT-RJ**

All fiber-optic connectors use ferrules to hold the ends of the fiber and keep them properly aligned.

The ST connector uses a half-twist bayonet type of lock, while SMA and FC use threaded connections.

The SC uses a push-pull connector similar to common audio and video plugs and sockets.



The MIC is the standard FDDI connector.

The Fiber Jack connector attaches two fibers in a snap lock connector similar in size and ease of use as an RJ-45 connector.

MT-RJ is a popular connector for two fibers in a very small form factor.


# Conektori

► Verificati <http://rf-opto/etc.tuiasi.ro>

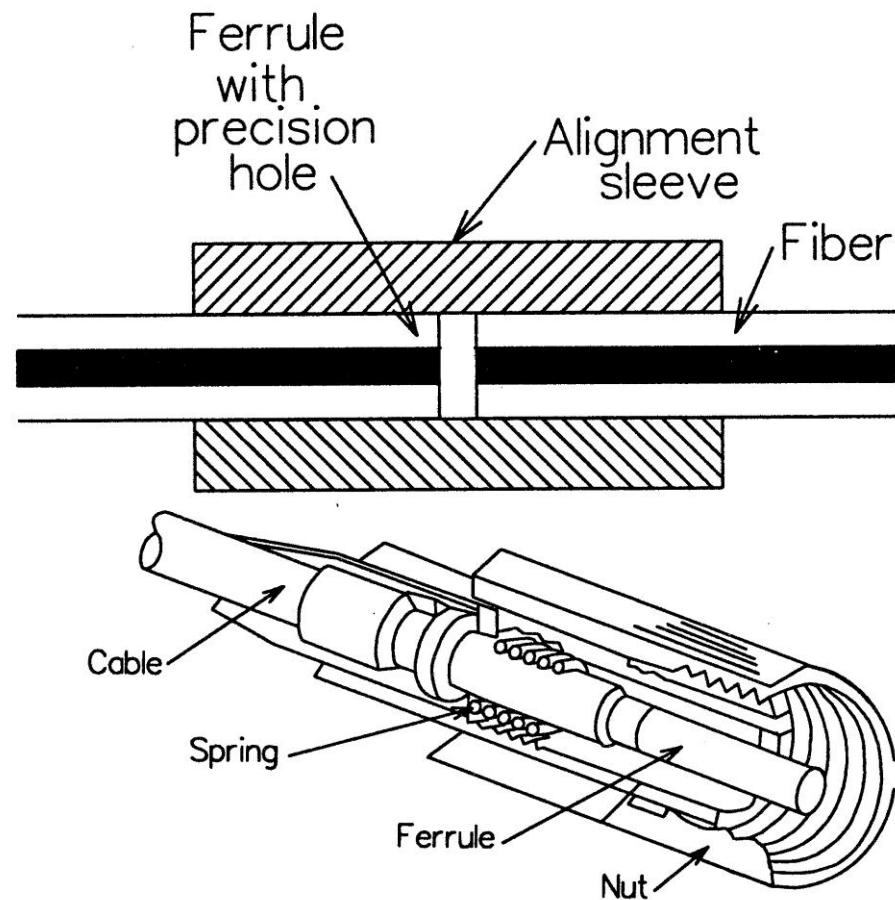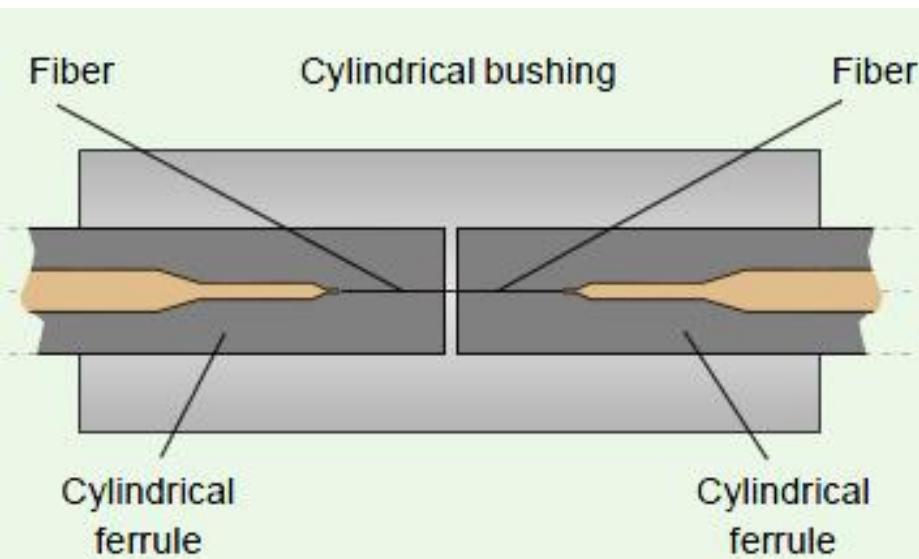


# Coneitori



- ▶ Ferula semisferica
  - 20mm
  - 60mm

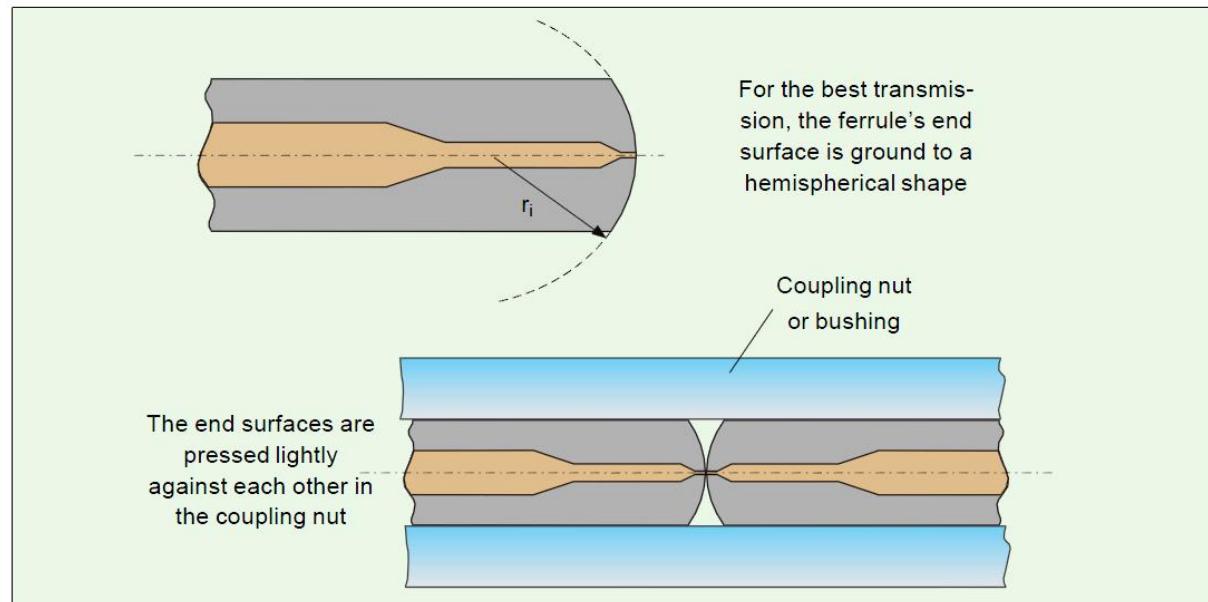

- ▶ Coneitori multifibra

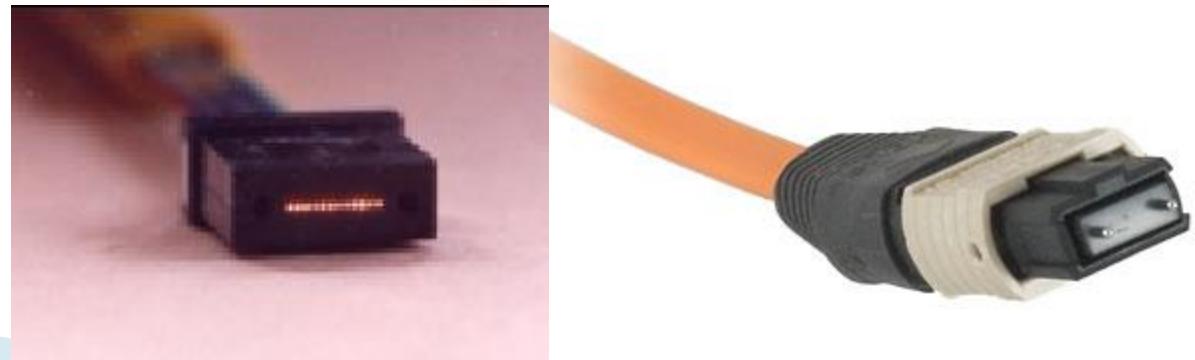


# Expanded beam connector

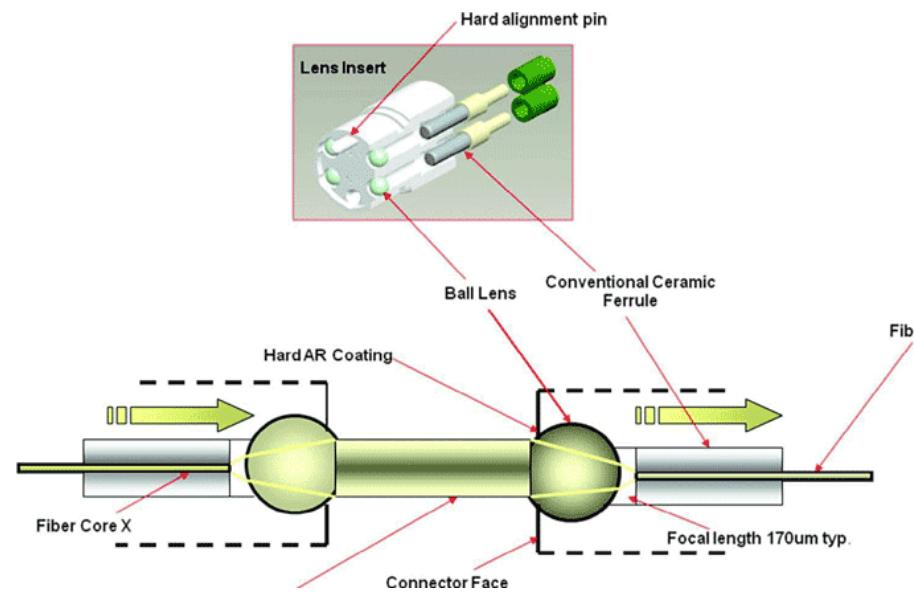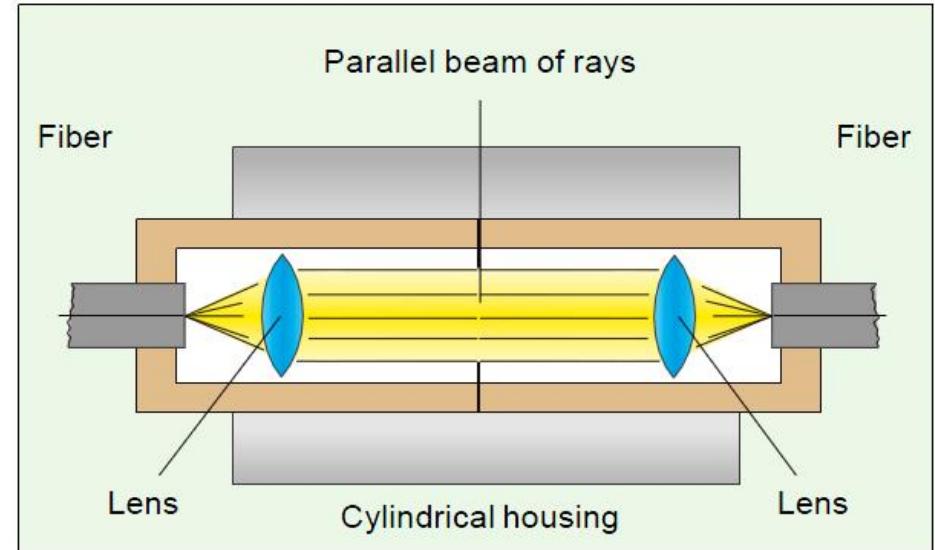

# Dimensionarea unei legături pe fibra optică

Capitolul 7

# Limite putere/bandă a dispozitivelor optoelectronice

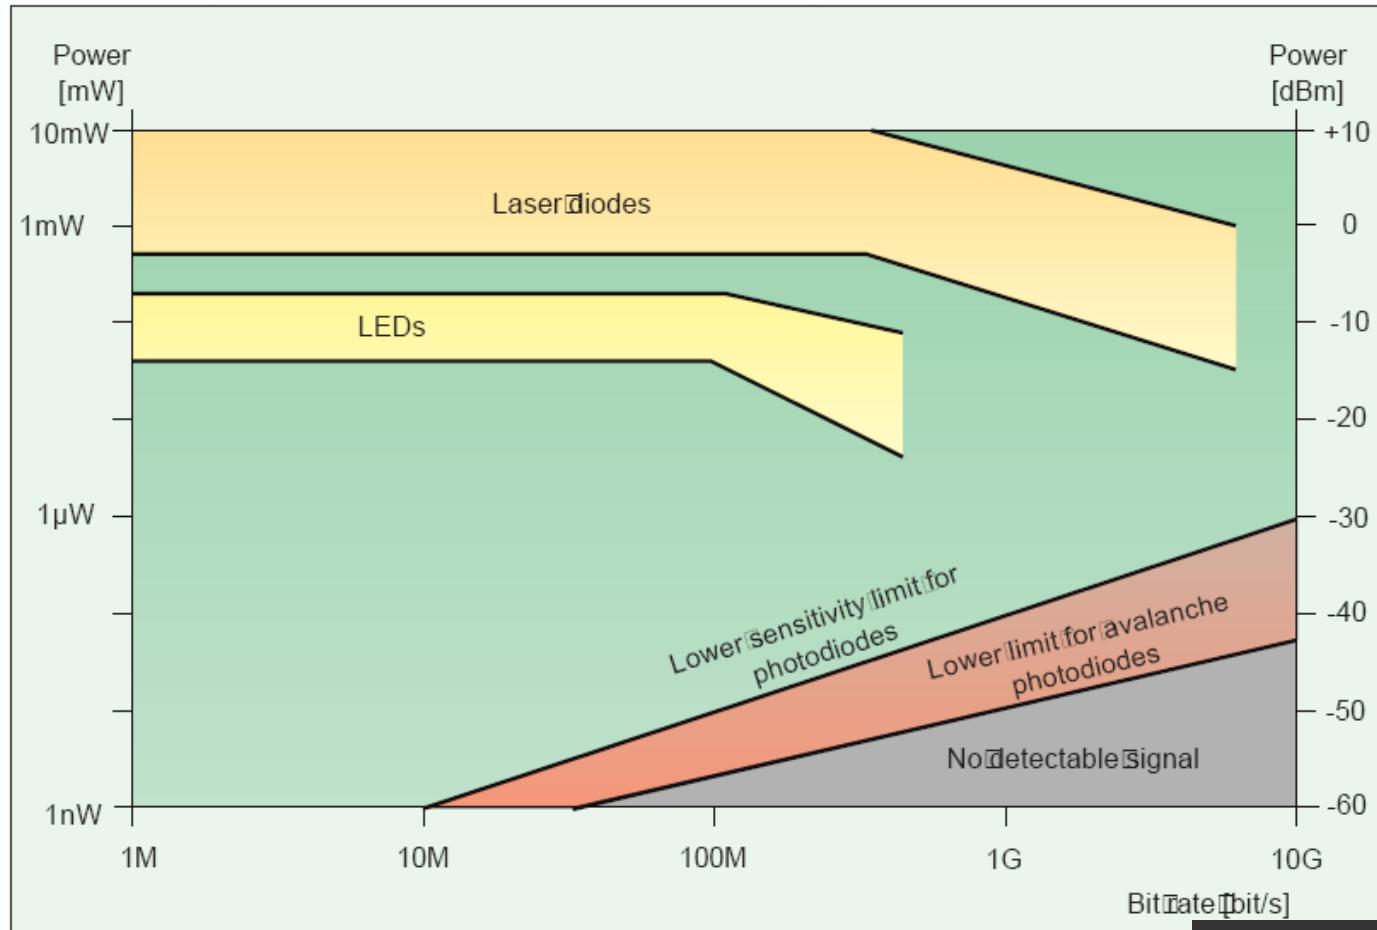


$$\text{dB} = 10 \cdot \log_{10} (P_2 / P_1)$$

$$\text{dBm} = 10 \cdot \log_{10} (P / 1 \text{ mW})$$


$$[\text{dBm}] + [\text{dB}] = [\text{dBm}]$$

# Legatura pe fibra optica

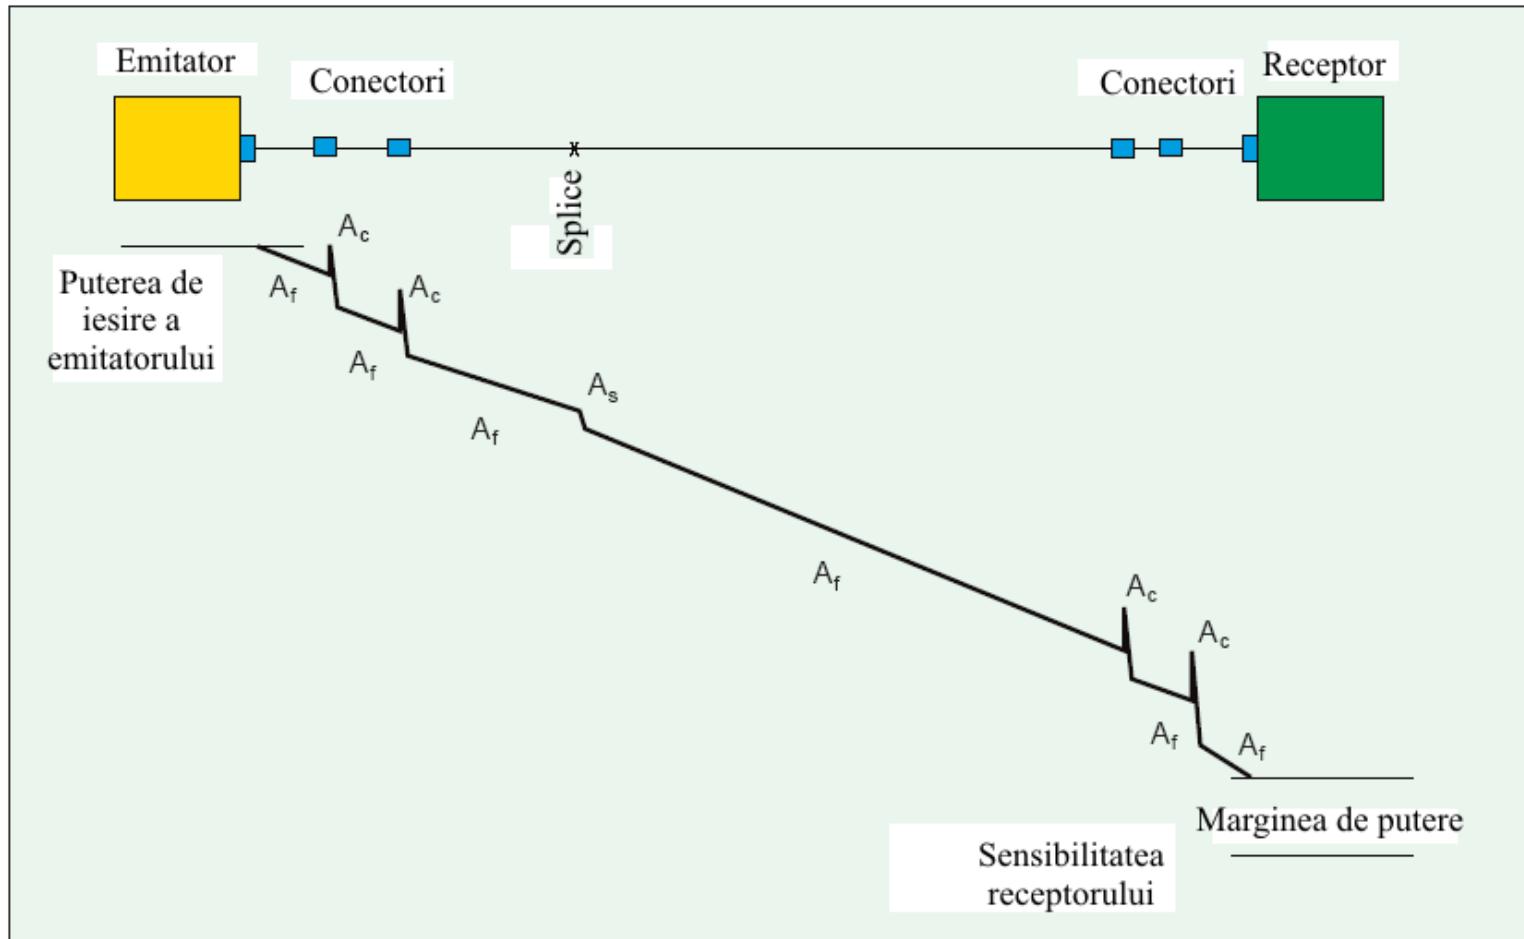

# Pierderi - Apertura numérica


- ▶ **Numai** la trecerea de la apertura numérica mai mare la apertura numérica mai mică

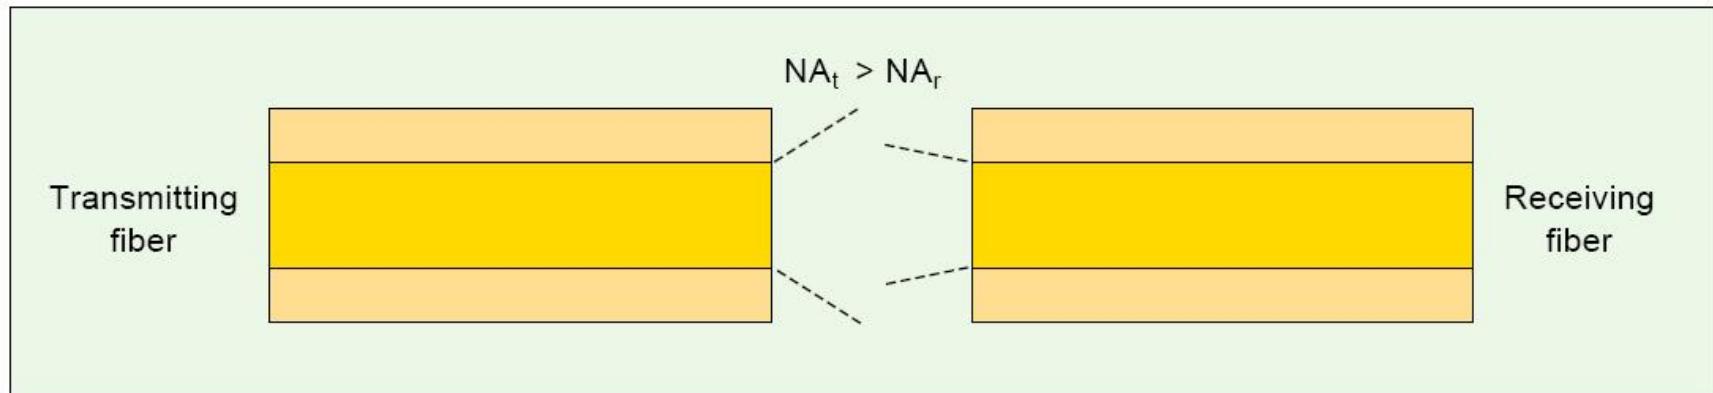

$$\text{Attenuation}_{NA} = 10 \log_{10} \left( \frac{NA_r}{NA_t} \right)^2$$

# Pierderi - Diametrul miezului



- ▶ **Numai** la trecerea de la diametru mai mare la diametru mai mic

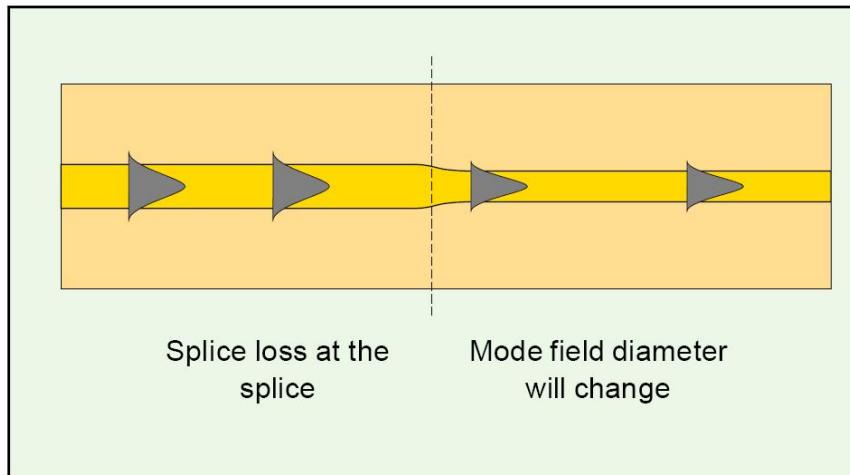


$$\text{Attenuation}_{\phi} \text{ (multimode)} = -10 \log_{10} \left( \frac{\phi_r}{\phi_t} \right)^2$$

$$\text{Attenuation}_{\phi} \text{ (single-mode)} = -20 \log \left( \frac{2 w_1 w_2}{w_1^2 + w_2^2} \right)$$

# Pierderi - Nealinierea axelor

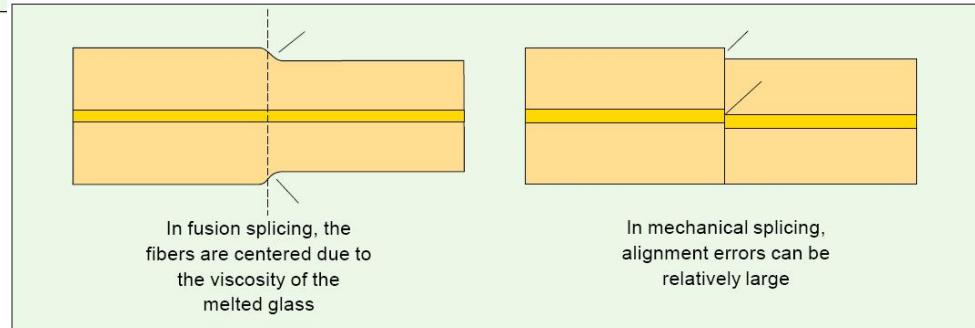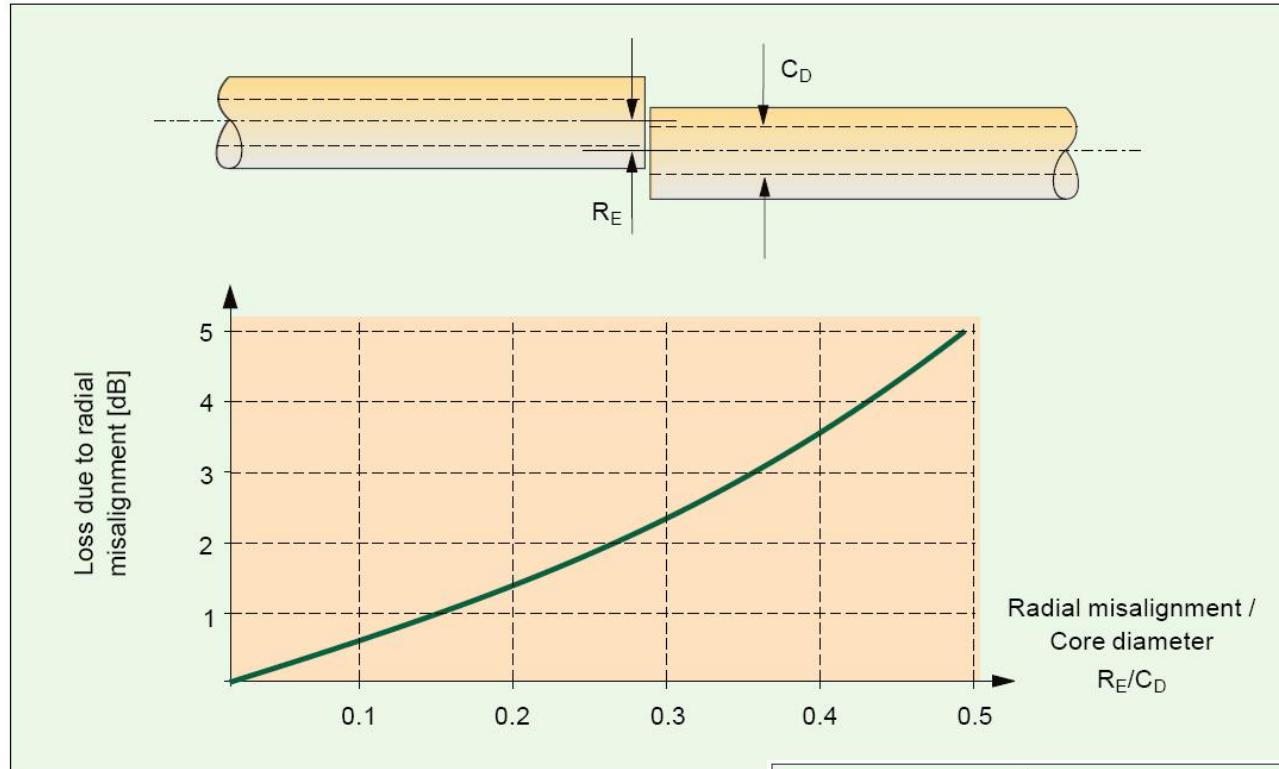


# Pierderi - unghi

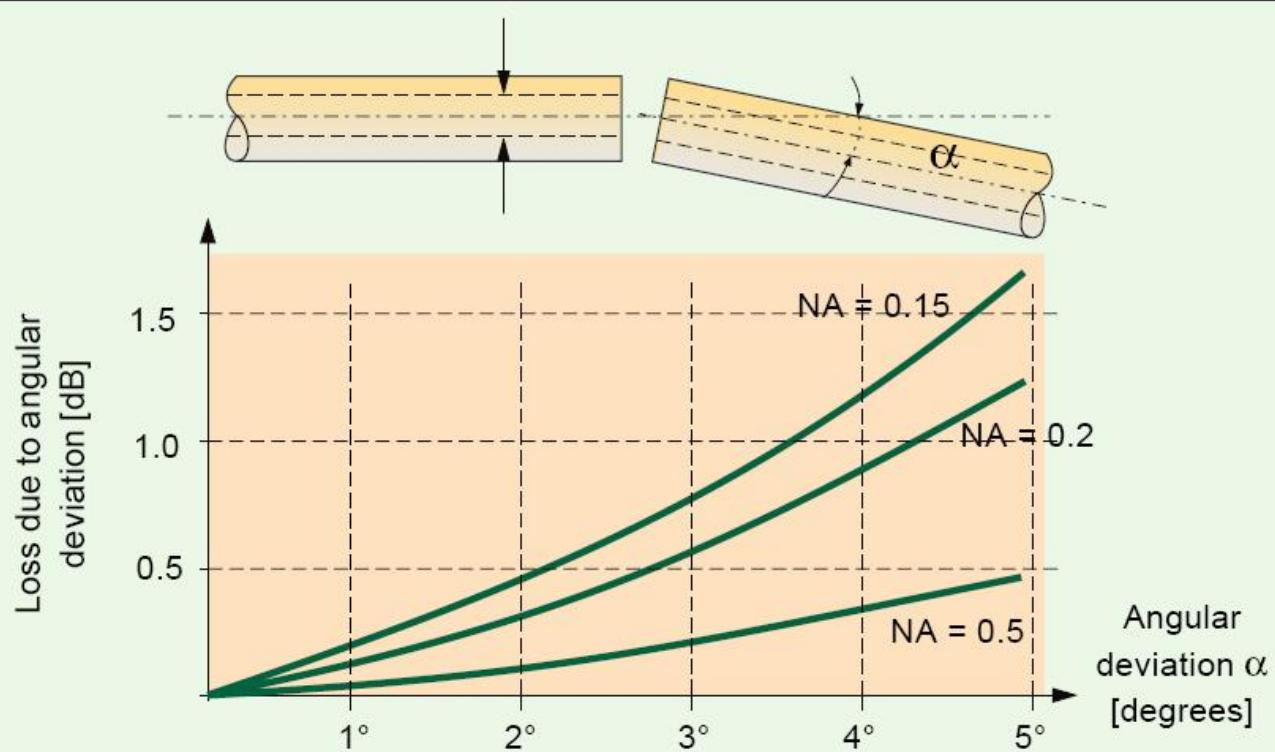

# Pierderi – distanță

- ▶ Se foloseste un gel cu indice de refractie egal cu al fibrelor
- ▶ Se aduna pierderile generate de reflexie pe o lamela (pana la 16%)

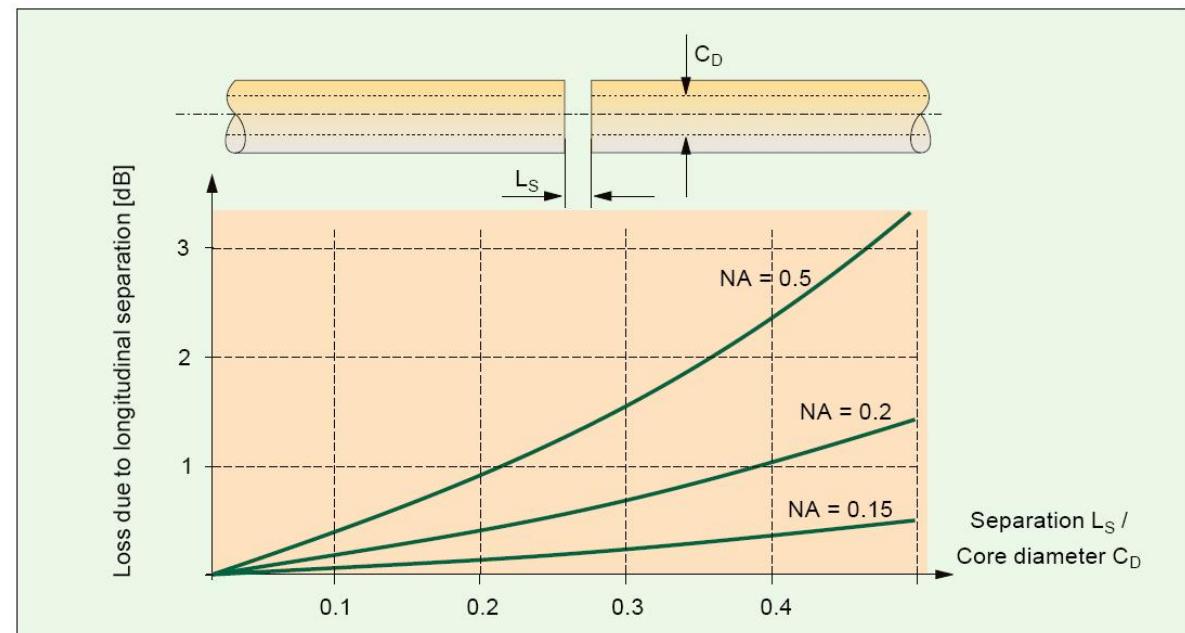

# Exemplu

- ▶ Trebuie să realizați o legătură pe fibră optică pe o distanță de 50 km la o viteză de 1Gb/s.

Emițători: = 1.5mW ( $\Delta\lambda=2\text{nm}$ , diverse $\lambda$ )	NA = 0.17	$\Phi = 13\mu\text{m}$
Pierderi splice (tehnologie)	0.15 dB/splice	
Pierderi conector	0.5 dB/conector	
Cablu conexiune: L = 20m	NA = 0.12	fibră: 11/125 $\mu\text{m}$
Cablu conexiune: L = 20m	NA = 0.15	fibră: 11/125 $\mu\text{m}$
Fibra 1	8 X 5km	
Fibra 2	4 X 10km	
Fibra 3	8 X 5km	
Fibra 4	4 X 10km	
Receptor: Sensitivitate = 1 $\mu\text{W}$	NA = 0.25	$\Phi = 30\mu\text{m}$

# Catalog

## Optical Specifications

### Fibra nr. 3

#### Fiber Attenuation

Wavelength (nm)	Maximum Attenuation (dB/km)
1310	0.33 ± 0.35
1383**	0.31 ± 0.35
1490	0.21 ± 0.24
1550	0.19 ± 0.20
1625	0.20 ± 0.23

\*Maximum specified attenuation value available within the stated ranges.

\*\*Attenuation values at this wavelength represent post-hydrogen aging performance.

Alternate attenuation offerings available upon request.

#### Attenuation vs. Wavelength

Range (nm)	Ref. $\lambda$ (nm)	Max. $\alpha$ (dB/km)	Difference (nm)
1285 – 1330	1310	0.03	
1525 – 1575	1550	0.02	

The attenuation in a given wavelength range does not exceed the attenuation of the reference wavelength ( $\lambda$ ) by more than the value  $\alpha$ .

#### Mandrel Loss

Mandrel (mm)	Number of Turns	Wavelength (nm)	Induced Attenuation* (dB)
32	1	1550	±0.03
50	100	1310	±0.03
50	100	1550	±0.03
60	100	1625	±0.03

\*The induced attenuation due to fiber wrapped around a mandrel of a specified diameter.

#### Point Discontinuity

Wavelength (nm)	Point Discontinuity (dB)
1310	±0.05
1550	±0.05

## Dimensional Specifications

#### Glass Geometry

Fiber Curl	≤ 4.0 in radius of curvature
Cladding Diameter	125.0 ± 0.7 $\mu\text{m}$
Core-Clad Concentricity	≤ 0.5 $\mu\text{m}$
Cladding Non-Circularity	≤ 0.7%

#### Environmental Specifications

Environmental Test	Test Condition	Induced Attenuation 1310 nm, 1550 nm & 1625 nm (dB/km)
Temperature Dependence	-60°C to +85°C*	±0.05
Temperature Humidity Cycling	-10°C to +85°C* up to 98% RH	±0.05
Water Immersion	23° ± 2°C	±0.05
Heat Aging	85° ± 2°C*	±0.05

\*Reference temperature = +23°C.

Operating Temperature Range: -60°C to +85°C.

#### Cable Cutoff Wavelength ( $\lambda_{ccf}$ )

$\lambda_{ccf} \leq 1260 \text{ nm}$

#### Mode-Field Diameter

Wavelength (nm)	MF D ( $\mu\text{m}$ )
1310	9.4 ± 0.4
1550	10.6 ± 0.5

#### Dispersion

Wavelength (nm)	Dispersion Value [ps/(nm·km)]
1550	±18
1625	±23

Zero Dispersion Wavelength ( $\lambda_0$ ): 1310 nm ≤  $\lambda_0$  ≤ 1324 nm  
Zero Dispersion Slope ( $S_d$ ): ± 0.09 ps/(nm<sup>2</sup>·km)

#### Polarization Mode Dispersion (PMD)

Value (ps/v/km)

PMD Link Design Value	±0.06*
Maximum Individual Fiber	±0.2

\*Complies with IEC 60794-3, 2001, Section 5.5, Method 1, September 2001.

The PMD link design value is a term used to describe the PMD of concatenated lengths of fiber (also known as PMD<sub>0</sub>). This value represents a statistical upper limit for total link PMD. Individual PMD values may change when cabled. Corning's fiber specification supports network design requirements for a 0.5 ps/km maximum PMD.

#### Coating Geometry

Coating Diameter	245 ± 5 $\mu\text{m}$
Coating-Cladding Concentricity	<12 $\mu\text{m}$

## Mechanical Specifications

#### Proof Test

The entire fiber length is subjected to a tensile stress ±100 kpsi (0.7 GPa)\*.  
\*Higher proof test levels available.

#### Length

Fiber lengths available up to 50.4 km/spool.  
\*Longer spliced lengths available.

## Performance Characterizations

Characterized parameters are typical values.

#### Core Diameter

8.2  $\mu\text{m}$

#### Numerical Aperture

0.14

*N.A. is measured at the one percent power level of a one-dimensional far-field scan at 1310 nm.*

#### Zero Dispersion Wavelength ( $\lambda_0$ )

1317 nm

#### Zero Dispersion Slope ( $S_d$ )

0.088 ps/(nm<sup>2</sup>·km)

#### Effective Group Index ( $N_{eff}$ )

1310 nm: 1.4670

1550 nm: 1.4677

#### Fatigue Resistance Parameter ( $N_f$ )

20

Dry: 0.6 lbs. (3N)  
Wet: 14-day room temperature:  
0.6 lbs. (3N)

#### Rayleigh Backscatter Coefficient (for 1 ns Pulse Width)

1310 nm: -77 dB

1550 nm: -82 dB

#### Stimulated Brillouin Scattering Threshold

20 dBm<sup>0</sup>

#### Note:

(1) When characterized with a transmitter consisting of 17 dB SBS threshold over standard single-mode fiber. While absolute SBS threshold is a function of distance and signal format, NexCor fiber offers a 3 dB improvement over standard single-mode fiber independent of these variables.

## Formulas

#### Dispersion

$$\text{Dispersion} = D(\lambda) = \frac{S_d}{4} \left[ (\lambda - \frac{\lambda_0}{k}) \right] \text{ps}/(\text{nm} \cdot \text{km})$$

for 1200 nm ≤  $\lambda$  ≤ 1625 nm

$\lambda$  = Operating Wavelength

#### Cladding Non-Circularity

$$\text{Cladding Non-Circularity} = \left[ 1 - \frac{\text{Min. Cladding Diameter}}{\text{Max. Cladding Diameter}} \right] \times 100$$

## How to Order

Contact your sales representative, or call the Optical Fiber Customer Service Department:  
Ph: 607-248-2000 (U.S. and Canada)  
44-1244-287-437 (Europe)  
Email: [opticalfibers@corning.com](mailto:opticalfibers@corning.com)  
Please specify the fiber type, attenuation and quantity when ordering.

#### Corning Incorporated

[www.corning.com/opticalfiber](http://www.corning.com/opticalfiber)

One Riverfront Plaza

Corning, NY 14831

U.S.A.

Ph: 800-525-2324 (U.S. and Canada)

607-786-8125 (International)

Fx: 800-519-3632 (U.S. and Canada)

607-786-8344 (International)

Email: [cocf@corning.com](mailto:cocf@corning.com)

Europe

Ph: 00 800 662 6621 (U.K., Ireland, Italy, France, Germany, The Netherlands, Spain and Sweden)

+44 1244 287 437 (All Other Countries)

Fx: +44 1244 383 8344

Asia Pacific

Australia

Ph: 1-800-148-690

Fx: 0800-48-568

Indonesia

Ph: 061-803-015-721-1261

Fx: 061-803-015-721-1262

Malaysia

Ph: 1-800-40-3156

Fx: 1-800-40-3155

Philippines

Ph: 1-800-1-116-0338

Fx: 1-800-1-116-0339

Singapore

Ph: 800-1-300-955

Fx: 800-1-300-956

Thailand

Ph: 001-803-1-3-721-1263

Fx: 001-803-1-3-721-1264

Latin America

Brazil

Ph: 00817-762-4732

Fx: 00817-762-4996

Mexico

Ph: 001-800-213-1719

Fx: 001-800-319-1472

Venezuela

Ph: 800-1-4418

Fx: 800-1-4419

Greater China

Email: [GCCInfo@corning.com](mailto:GCCInfo@corning.com)

Beijing

Ph: (86) 10-6505-5066

Fx: (86) 10-6505-5077

Hong Kong

Ph: (852) 2-2807-2723

Fx: (852) 2-2807-2152

Shanghai

Ph: (86) 2-3222-4668

Fx: (86) 2-6288-1575

Taiwan

Ph: (886) 2-2716-0338

Fx: (886) 2-2716-0339

Note: Corning is a trademark, and Corning and SBS™ are registered trademarks, of Corning Incorporated, Corning, N.Y.

Any warranty or any terms relating to any Corning optical fiber is only contained in the written agreement between Corning and its distributor or reseller, and does not extend to any other person.

©2007, Corning Incorporated

# Intrebari

- ▶ (1p) Ce lungime de undă veți alege pentru emițător? Justificați.
- ▶ (2p) Alegeti fibrele pe care le veți utiliza. Justificați. Realizați schița legăturii
- ▶ (1p) Puteți realiza o legătură funcțională? Justificați.

<i>Zero Dispersion Wavelength (<math>\lambda_0</math>)</i>	1317 nm
<i>Zero Dispersion Slope (<math>S_0</math>)</i>	0.088 ps/(nm <sup>2</sup> •km)


# Legatura

## ► Bilantul puterilor

$$A_{tot}[\text{dB}] = \sum_i A_i[\text{dB}]$$

$$P_e[\text{dBm}] \pm A_{tot}[\text{dB}] \geq S_r[\text{dBm}] + M[\text{dB}]$$

<i>Maximum Attenuation</i>	
Wavelength (nm)	Maximum Value* (dB/km)
1310	0.33 – 0.35
1383**	0.31 – 0.35
1490	0.21 – 0.24
1550	0.19 – 0.20
1625	0.20 – 0.23

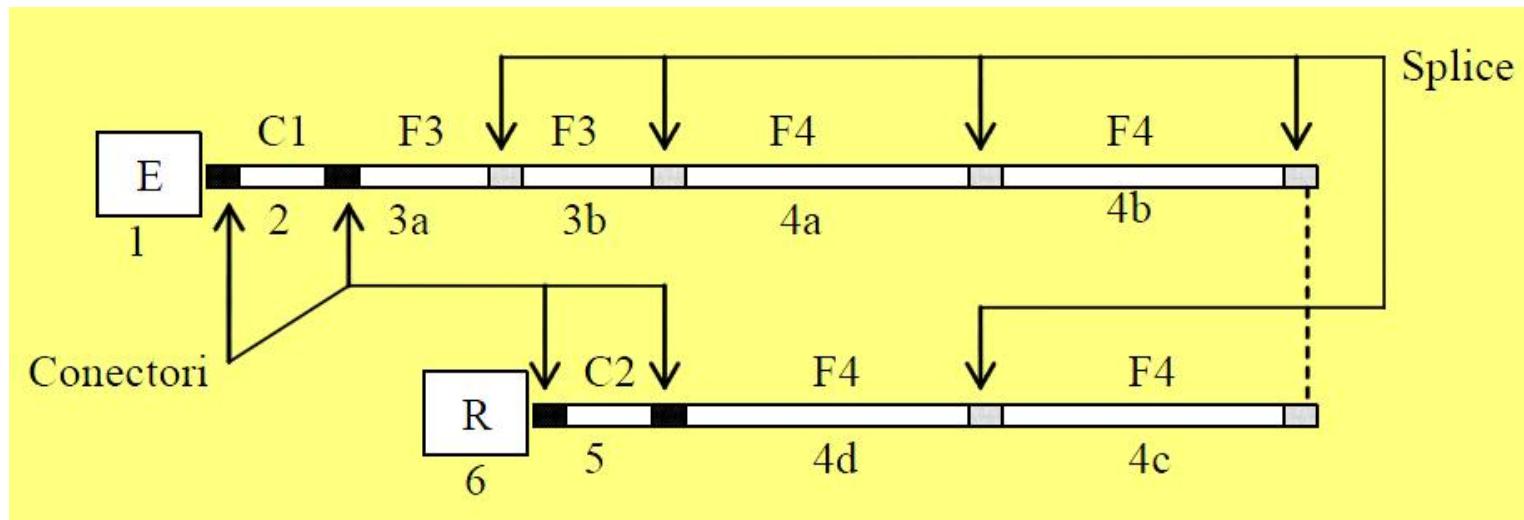

# Sistem

- ▶ 1. Emitter
- ▶ 2. Cablu 1 de conexiune
- ▶ 3. Fibra 3 (2 cabluri a 5 km fiecare: 3a,3b)
- ▶ 4. Fibra 4 (4 cabluri a 10 km fiecare:  
4a,4b,4c,4d)
- ▶ 5. Cablu 2 de conexiune
- ▶ 6. Receptor

# Pierderi

- ▶ Atenuare datorata conectorilor
- ▶ Atenuare datorata splice-urilor
- ▶ Atenuare in fibra
- ▶ Atenuare datorata diferentelor de apertura numerica
  - apare **numai** la trecerea de la un dispozitiv cu NA mai mare la un dispozitiv cu NA mai mic
- ▶ Atenuare datorata diferentelor de diametru
  - apare **numai** la trecerea de la un dispozitiv cu diametru mai mare la un dispozitiv cu diametru mai mic

# Dispersie

$$\Delta\tau_{\text{mod}} \cong \frac{L \cdot n_2 \cdot \Delta}{2\sqrt{3} \cdot c} \approx \frac{L \cdot N A^2}{4\sqrt{3} \cdot c \cdot n_2}$$

$$\Delta\tau_{cr} = D(\lambda) \cdot \Delta\lambda \cdot L$$

$$\Delta\tau_{tip} = \sum_i \Delta\tau_i$$

$$\Delta\tau_{\text{mod}} \cong \frac{L \cdot n_2 \cdot \Delta^2}{4\sqrt{3} \cdot c}$$

$$D(\lambda) = \frac{S_0}{4} \cdot \left( \lambda - \frac{\lambda_0^4}{\lambda^3} \right)$$

$$\Delta\tau_{tot} = \sqrt{\Delta\tau_{cr}^2 + \Delta\tau_{\text{mod}}^2}$$

$$B_{opt} = \frac{0.44}{\Delta\tau_{tot} [\text{ns}]} \quad [\text{GHz}]$$

$$B_{opt} = \sqrt{2} B_{el}$$

$$V[\text{Gb/s}] \cong 2 \cdot B_{el}$$



$$B_{3\text{dB, electric}} (\text{GHz}) = \frac{0.35}{T(\text{ns})}$$

$$\text{NRZ}_{\text{viteza date}} (\text{Gbit/s}) = \frac{1}{T_{\text{impuls}} (\text{ns})} \leq \frac{0.67}{T(\text{ns})}$$

# Lungime maxima

- ▶ limitata de atenuare

$$\text{Atenuare[dB/km]} = \frac{\text{Pierderi[dB]}}{\text{lungime[km]}}$$

$$L_{\max} = \frac{\Delta P_{\min} [\text{dB}]}{A_{\max} [\text{dB/km}]} = \frac{P_{e\min} [\text{dBm}] - S_{r\max} [\text{dBm}]}{A_{\max} [\text{dB/km}]}$$

- ▶ limitata de viteza

$$B_{el\min} \cong \frac{V_{\min} [Gb/s]}{2}$$

$$B_{opt\min} = \sqrt{2} B_{el\min}$$

$$\Delta\tau_{tot\max} [\text{ns}] = \frac{0.44}{B_{opt\min} [\text{GHz}]}$$

$$L_{\max} = \frac{\Delta\tau_{\max}}{D(\lambda) \cdot \Delta\lambda}$$

# Contact

- ▶ Laboratorul de microunde si optoelectronica
- ▶ <http://rf-opto.etti.tuiasi.ro>
- ▶ [rdamian@etti.tuiasi.ro](mailto:rdamian@etti.tuiasi.ro)