

# Optoelectrică

Curs 6

2020/2021

# Disciplina 2020/2021

- ▶ 2C/1L Optoelectronică **OPTO**
- ▶ **Minim 7 prezente curs + laborator**
- ▶ Curs – conf. Radu Damian
  - an IV μE
  - Miercuri 11–14, online, Microsoft Teams
  - E – 70% din nota (50+20), online, rf-opto
    - **20% test la curs**, saptamana 4–5?
  - probleme + (**? 1** subiect teorie) + (2p prez. curs)
  - **toate materialele permise**
- ▶ Laborator – sl. Daniel Matasaru
  - an IV μE
    - Marti 10-14 impar/par
  - L – 30% din nota (+Caiet de laborator)

# Orar 2020/2021

## ► Curs

- Miercuri 11–14, online
- **2C  $\Rightarrow$  3C**
  - $14 \cdot 2/3 \approx 9.33$
  - $9 \div 10 \text{ C} \approx 9\text{C} + \text{E}$

# Online

- ▶ acces la **examene** necesita **parola** primita prin **email**

English | Romana |

Start Didactic Master Colectiv Cercetare Studenții Note Lista Studenti Examene Fotografii

## POPESCU GOPO ION

Fotografia nu există

Date:

Grupa	5700 (2019/2020)
Specializarea	Inginerie electronica si telecomunicatii
Marca	7000021

Acceseaza ca acest student | [Ieșire acces la licență](#)

Note obtinute

Inca nu a fost notat.

Start Didactic Master Colectiv C

Note Lista Studenti Examene Fotografii

### Identificare

Introduceti numele si adresa de email utilizata la inscriere

Nume  
POPESCU GOPO

E-mail/Parola

Introduceti codul afisat mai jos

4db4457

Trimite

# Online

- ▶ acces email/parola

Start Didactic Master Colectiv

Note Lista Studenti Examene Fotografii

## POPESCU GOPO ION

**Fotografia nu există**

Date:

Grupa	5700 (2019/2020)
Specializarea	Inginerie electronică
Marca	7000021

Se acceseaza site-ul **ca acest student!**

Start Didactic Master Colectiv

Note Lista Studenti Examene Fotografii

## POPESCU GOPO ION

**Fotografia nu există**

Date:

Grupa	5700 (2019/2020)
Specializarea	Inginerie electronica s
Marca	7000021

Se acceseaza site-ul **ca acest student (inclusiv examene)!**

# Parola

## ► primita prin email

Important message from RF-OPTO

Inbox x

Radu-Florin Damian  
to me, POPESCU

Romanian ▾ English ▾ Translate message

 Laboratorul de Microunde si Optoelectronica  
Facultatea de Electronica, Telecomunicatii si Tehnologia Informatiei  
Universitatea Tehnica "Gh. Asachi" Iasi

In atentia: POPESCU GOPO ION  
Parola pentru a accesa examenele pe server-ul rf-opto este  
Parola: [REDACTED]

Identificati-vă pe [server](#), cu parola, cat mai rapid, pentru confirmare.

Memorati acest mesaj intr-un loc sigur, pentru utilizare ulterioara

---

Attention: POPESCU GOPO ION  
The password to access the exams on the rf-opto server is  
Password: [REDACTED]

Login to the [server](#), with this password, as soon as possible, for confirmation.  
Save this message in a safe place for later use

Reply Reply all Forward

Important message from RF-OPTO

Validation of MDCK exam from 02/05/2020

From Me <rdamian@etti.tuiasi.ro>  
Subject: Important message from RF-OPTO

To [REDACTED]  
Cc Me <rdamian@etti.tuiasi.ro>

 Laboratorul de Microunde si Optoelectronica  
Facultatea de Electronica, Telecomunicatii si Tehnologia Informatiei  
Universitatea Tehnica "Gh. Asachi" Iasi

In atentia: POPESCU GOPO ION  
Parola pentru a accesa examenele pe server-ul rf-opto este  
Parola: [REDACTED]

Identificati-vă pe [server](#), cu parola, cat mai rapid, pentru confirmare.

Memorati acest mesaj intr-un loc sigur, pentru utilizare ulterioara

---

Attention: POPESCU GOPO ION  
The password to access the exams on the rf-opto server is  
Password: [REDACTED]

Login to the [server](#), with this password, as soon as possible, for confirmation.  
Save this message in a safe place for later use

# Manual examen online

- ▶ Aplicatia de examen online utilizata intens la:
  - curs (prezenta)
  - miniteste
  - examen

## Materials

### Other data

[Manual examen on-line \(pdf, 2.65 MB, ro, !\[\]\(9dfdaff1d86ba3c1f8353b4d1b61b8c5\_img.jpg\)](#)

[Simulare Examen \(video\) \(mp4, 65.12 MB, ro, !\[\]\(83f22ed94ec5517769dd76d702c6bfd8\_img.jpg\)](#)

## Microwave Devices and Circuits (English)

# Examen online

## ► intotdeauna **contratimp**

- perioada lunga (prezenta curs/rezultate laborator)
- perioada scurta (teste: 15min, examen: 2h)

Start Didactic Master Colectiv Cercetare **Studenti**

Note Lista Studenti **Examene** Fotografii

Anunț  
17:28 (29/04/2020)

Material suport  
17:30 (29/04/2020)

Subiecte  
17:32 (29/04/2020)

Rezultate  
17:35 (29/04/2020)

Finalizare  
17:45 (29/04/2020)

Confirmare  
17:45 (30/04/2020)

Ormatorul interval de timp in.  
**01 m 08 s**  
[Reincarca acum](#)

### Anunț

In acest examen se verifica diverse actiuni ale studentilor pentru examen

### Ora pe server

Roate examenele sunt bazate pe fusul orar al server-ului (ar putea sa fie diferit de timpul local). Pentru referinta ora pe server este acum:

**29/04/2020 17:28:51**

# Fibra optică – Tehnologie

Capitolul 5



# Cuprins

- ▶ **Lumina ca undă electromagnetică** (ecuațiile lui Maxwell, ecuația undelor, parametrii de propagare)
- ▶ **Elemente de fotometrie și radiometrie** (mărimi energetice/luminoase)
- ▶ **Fibra optică** (realizare, principiu de funcționare, atenuare, dispersie, banda de frecvență)
- ▶ **Cabluri optice** (tehnologie, conectori, lipire – splice)
- ▶ **Proiectare sistemică a legăturii pe fibra optică** (bandă de frecvență, balanță puterilor)
- ▶ **Emițătoare optice** (LED și dioda laser – realizare fizică și funcționare)
- ▶ **Receptoare optice** (dioda PIN, dioda cu avalanșă – realizare fizică și funcționare)
- ▶ **Amplificatoare transimpedanță** (parametri, scheme tipice, TIA în buclă deschisă, cu reacție, diferențiale, control automat al câștigului)
- ▶ **Realizarea circuitelor pentru controlul emițătoarelor optice** (parametri, scheme tipice, controlul puterii, multiplexoare)
- ▶ **Dispozitive de captare a energiei solare** (principiu de funcționare, utilizare, proiectare )

# Stabilized light source


## Optical power meter

- ▶ Masurarea puterii si atenuarii

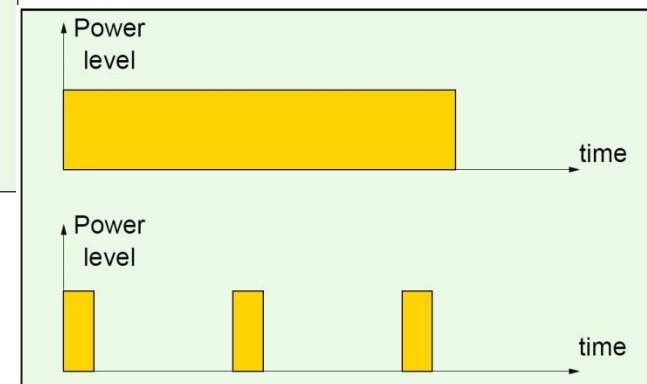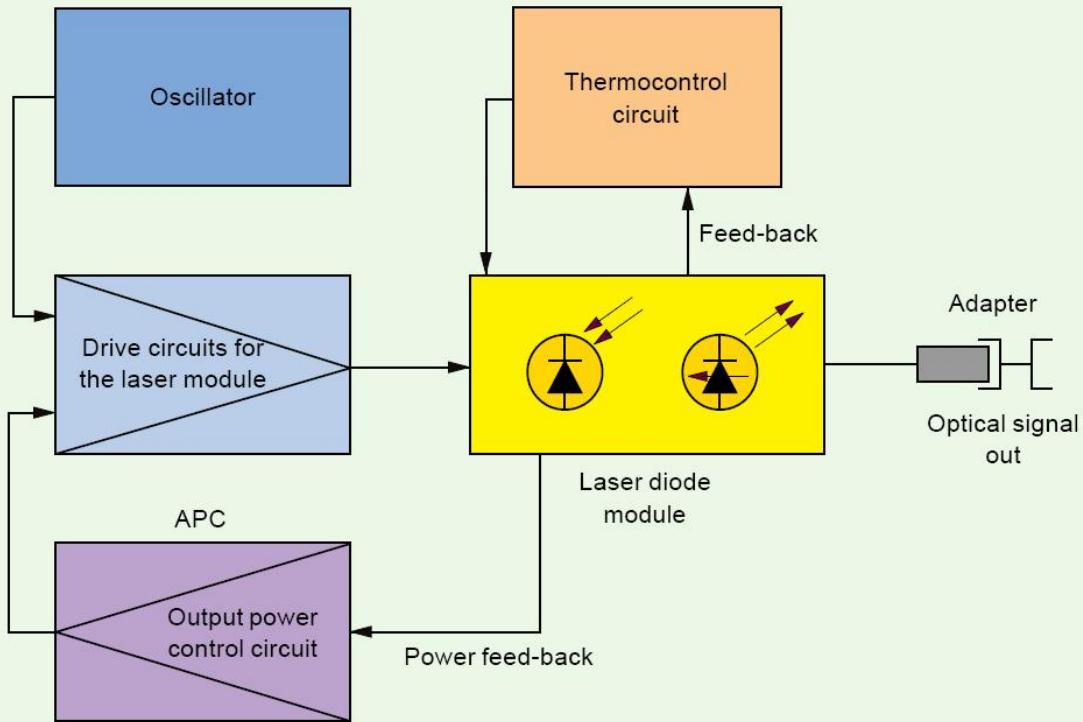


# Masurarea puterii si atenuuarii

## ▶ Masuratoare referinta

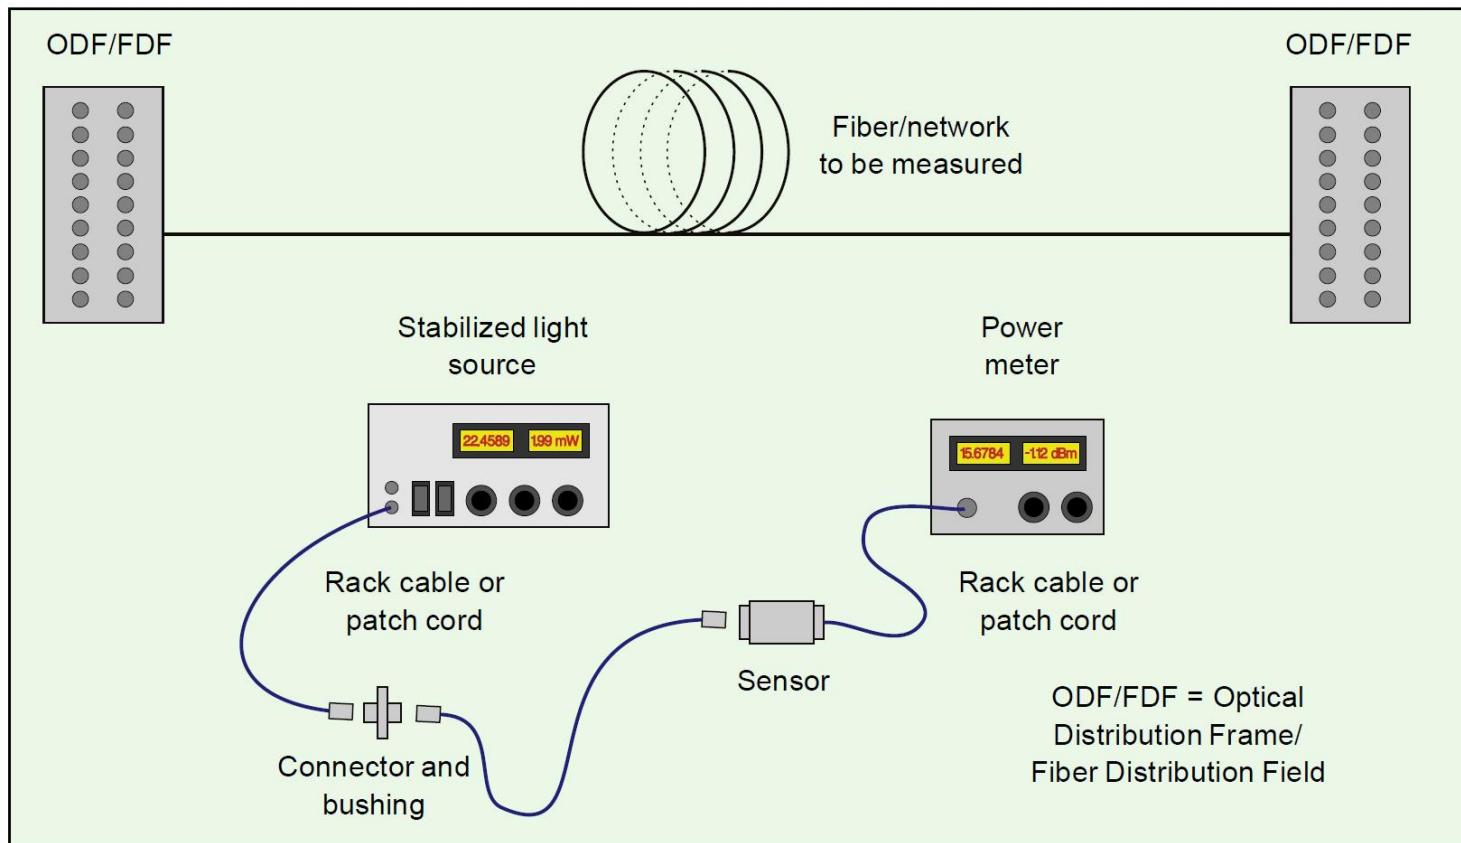


# Masurarea puterii si atenuuarii

## ▶ Masuratoare instalatie

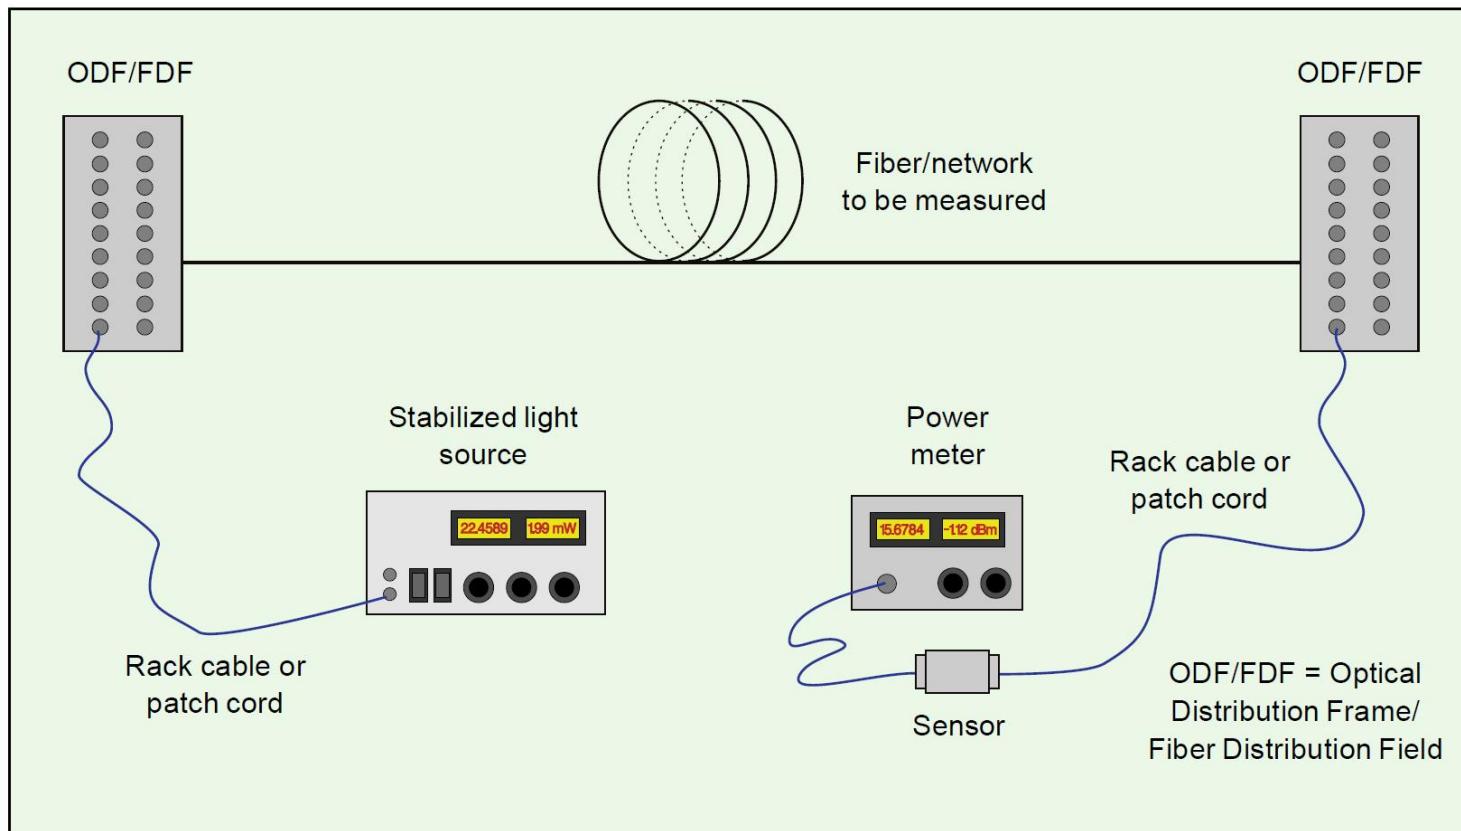



# Masurare conectori si splice

- ▶ Se elimina efectele fibrei

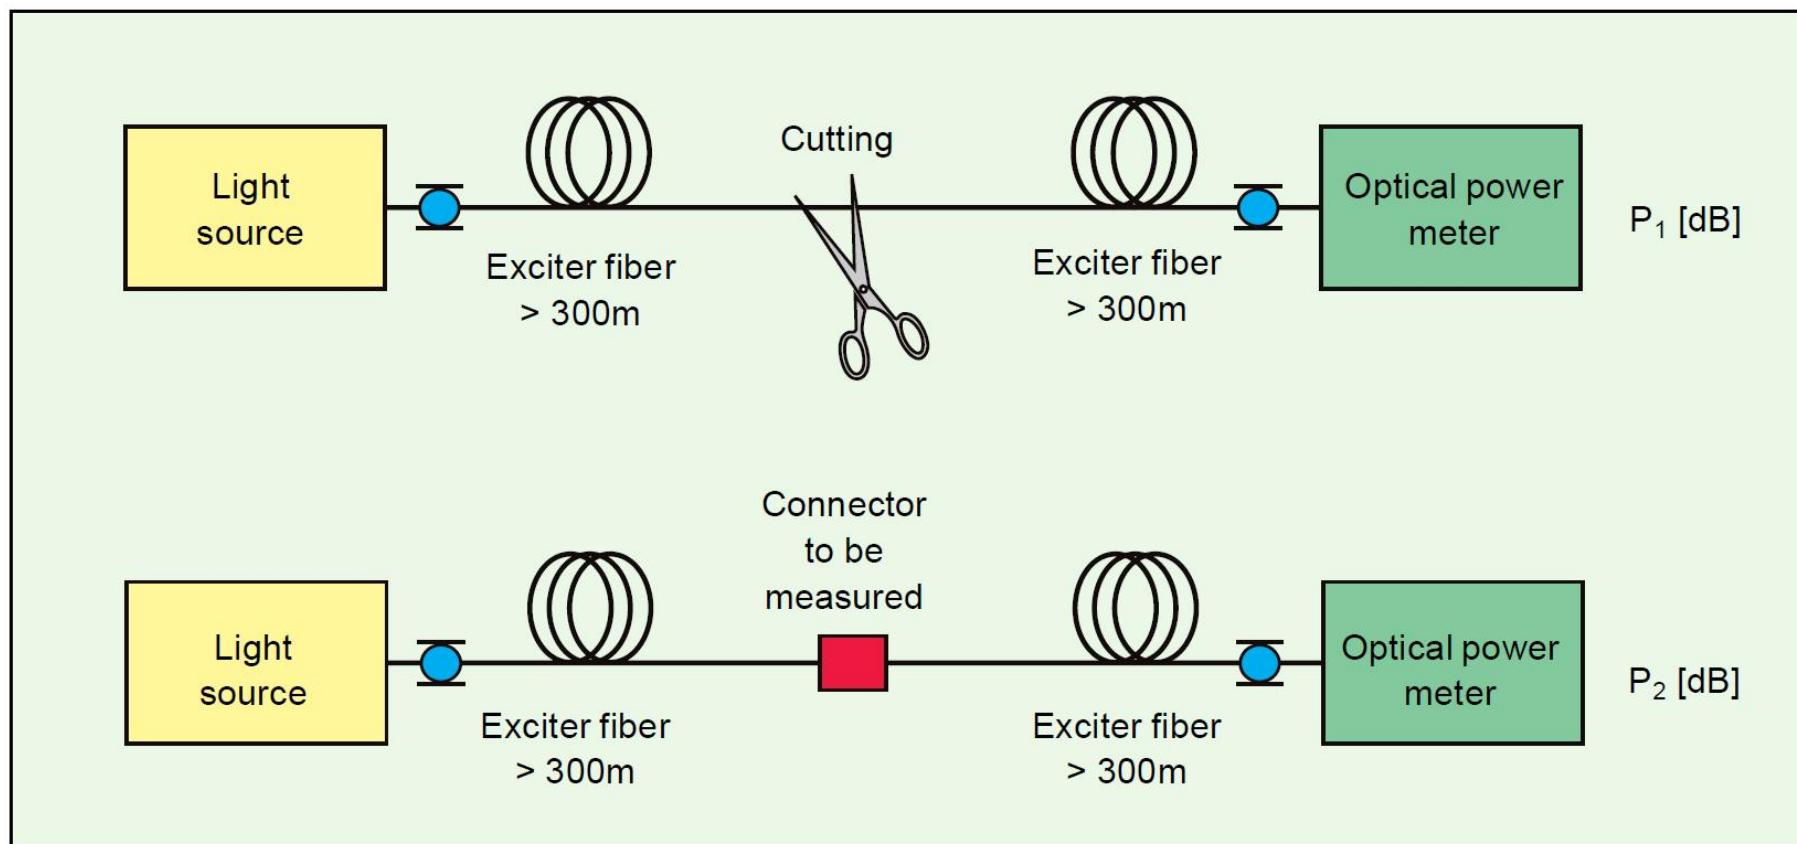


# OTDR

- ▶ Optical Time-Domain Reflectometer
- ▶ Localizarea defectelor

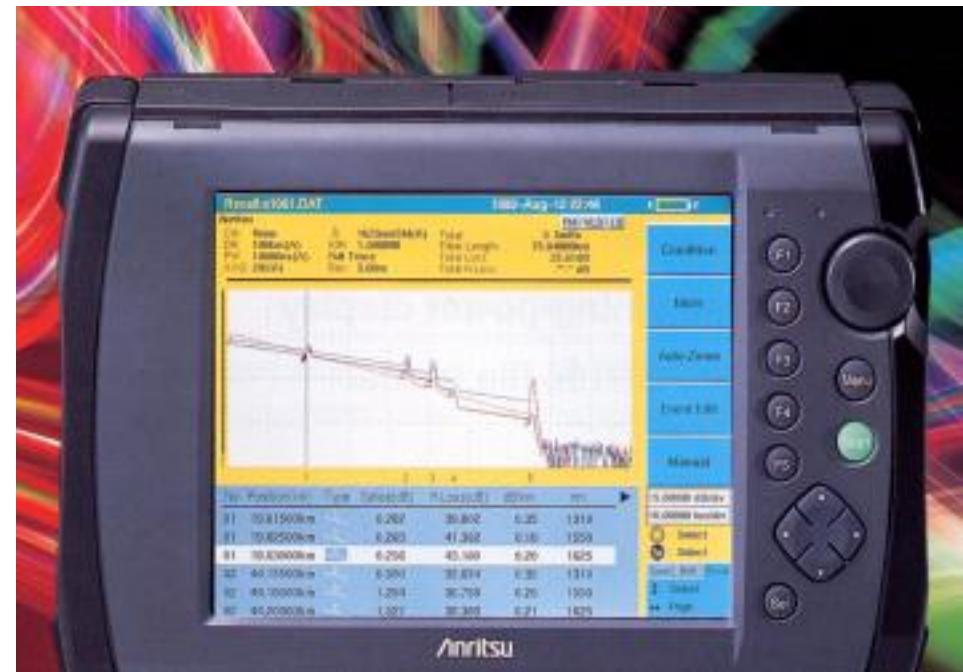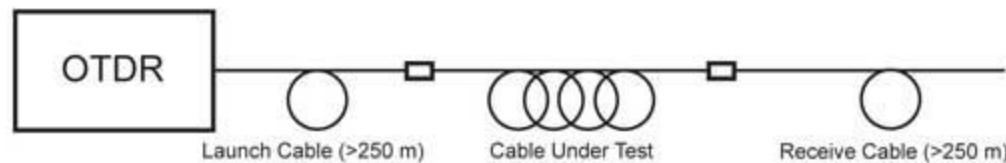


# OTDR


- ▶ Optical time-domain reflectometer
- ▶ Localizarea defectelor

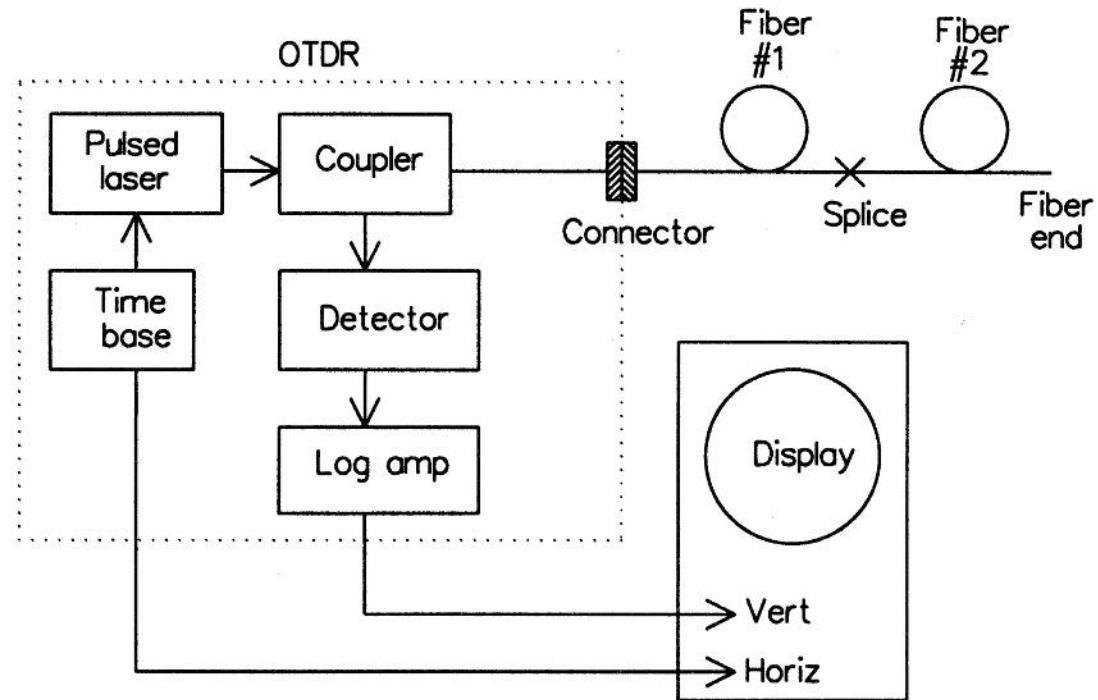

# Rezultat grafic al OTDR

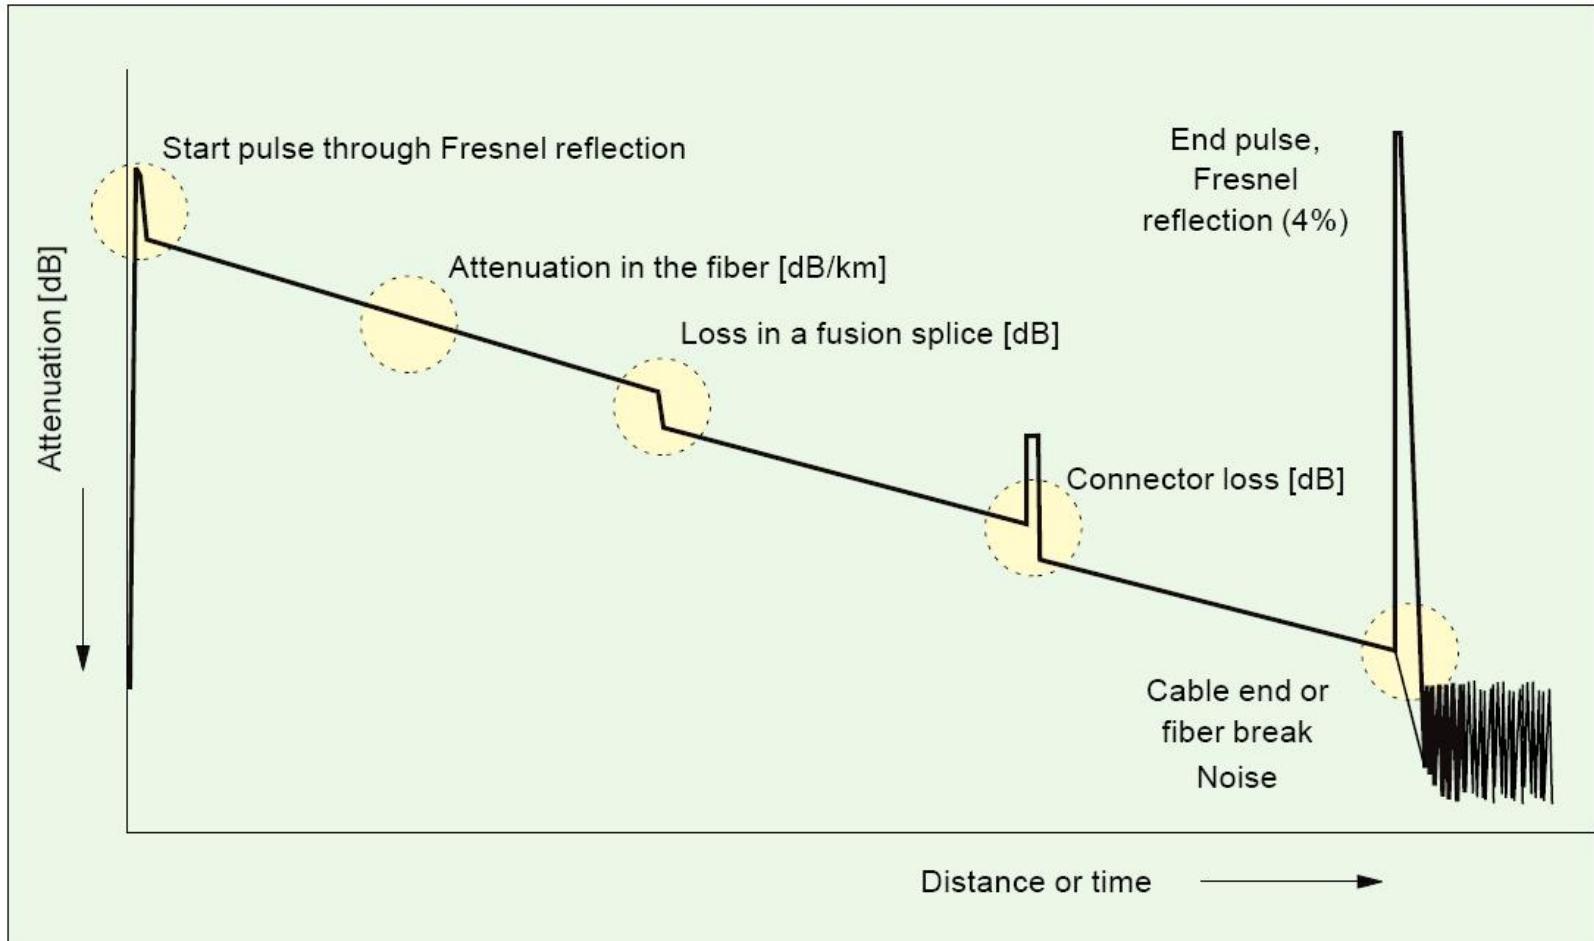


# Efecte vizibile OTDR

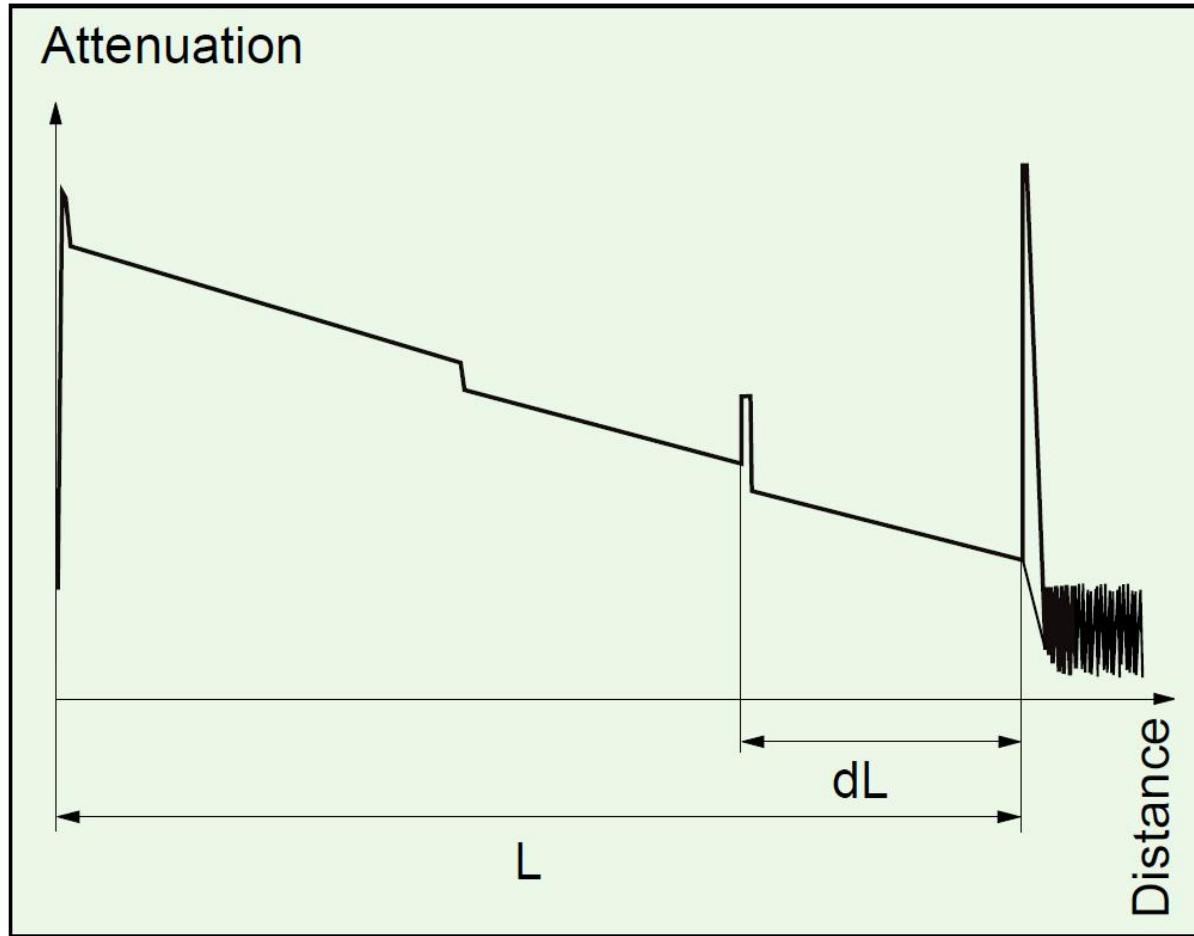

$$2 \cdot L = c \cdot t$$

$$L = \frac{c_0}{n} \cdot \frac{t}{2}$$

# Efecte vizibile OTDR

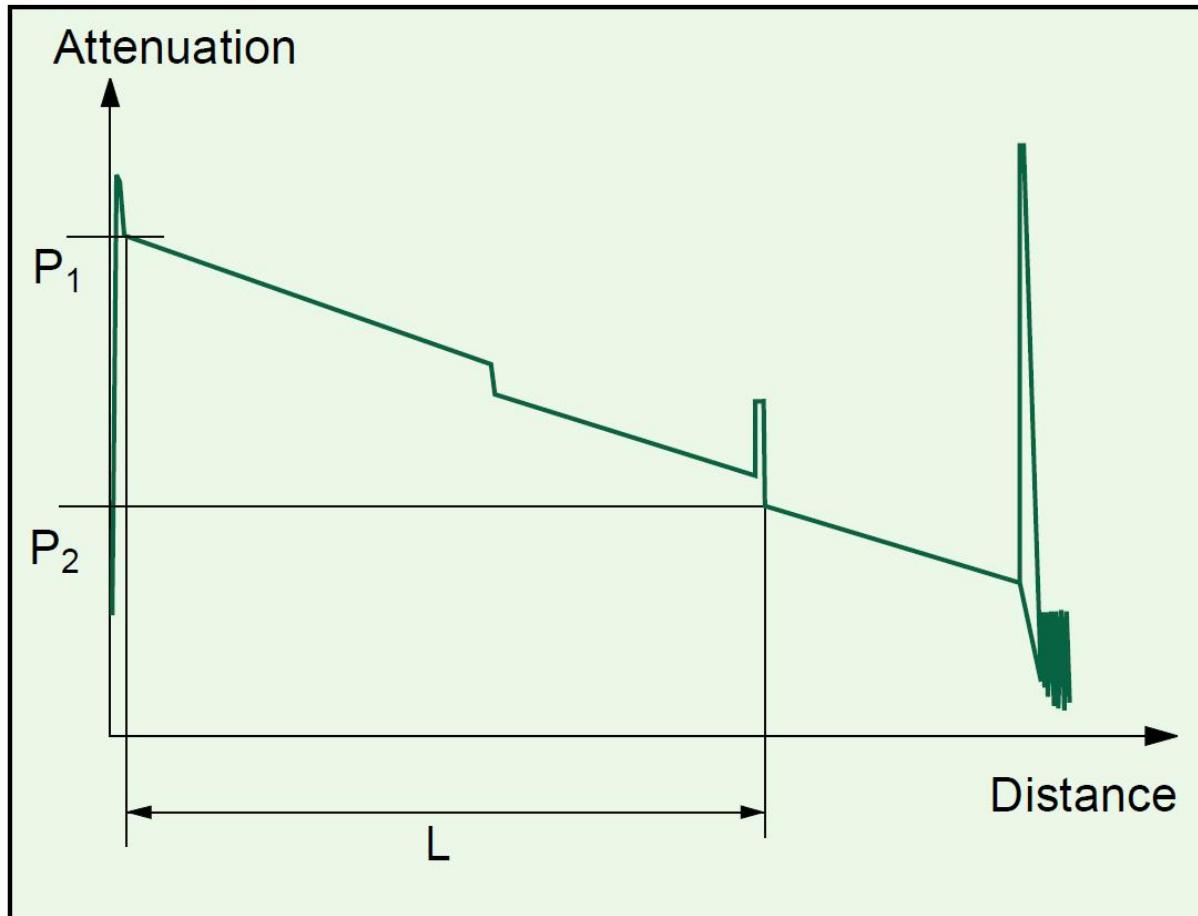


$$A[dB] = \frac{P_1 - P_2}{2}$$

$$A[dB/km] = \frac{P_1 - P_2}{2 \cdot L}$$


panta curbei

# Efecte vizibile OTDR - Splice

► splice loss -  $A(s)$

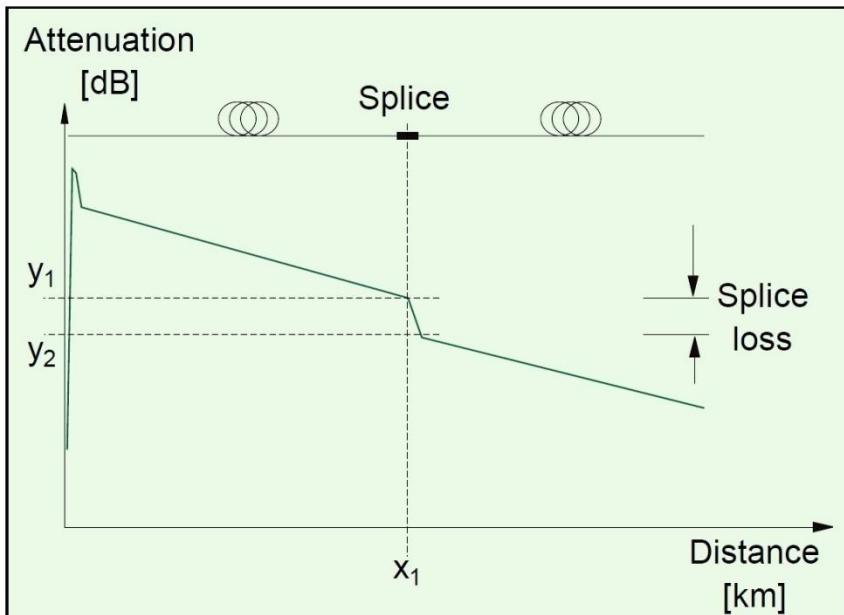


$$A(s) = y_1 - y_2$$

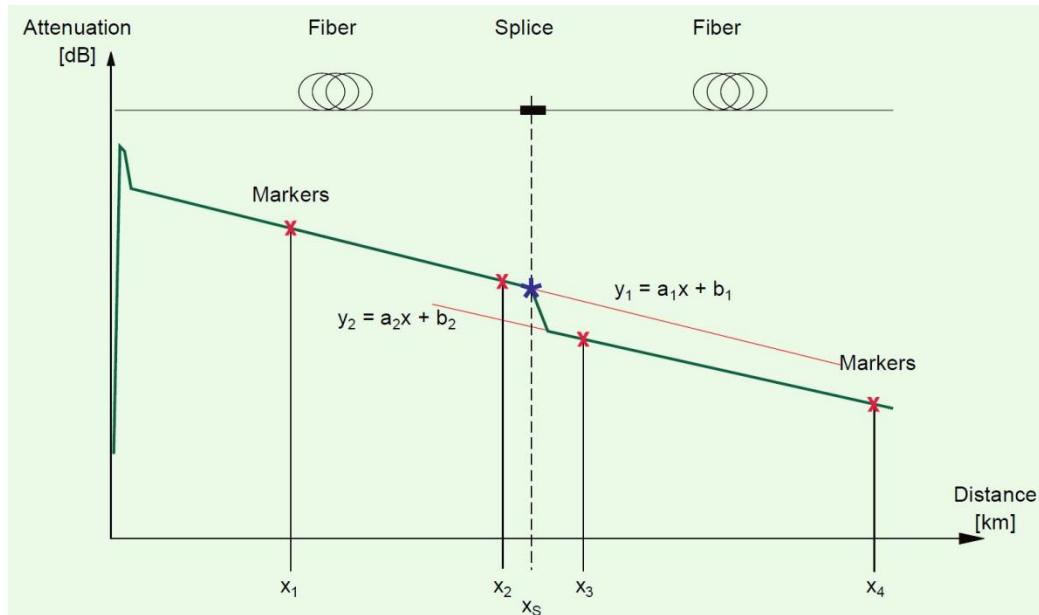

$$A(s) = y_1 - y_2 = x_s \cdot (a_1 - a_2) + (b_1 - b_2)$$

# Efecte vizibile OTDR - Splice


a. same fiber spliced

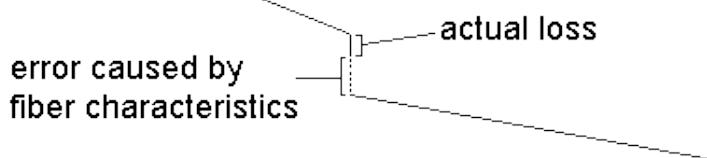

actual loss

error caused by fiber characteristics

b. high loss fiber spliced to low loss fiber

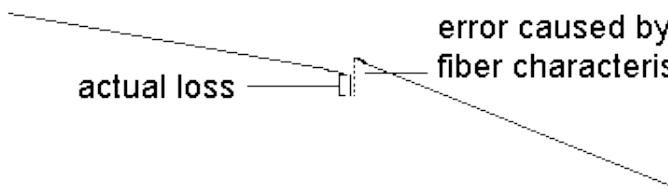

actual loss


error caused by fiber characteristics

c. low loss fiber spliced to high loss fiber  
can cause an apparent gain at a splice

$$A(s) = \frac{A(s)_{A \rightarrow B} + A(s)_{B \rightarrow A}}{2}$$


# Rezultat grafic al OTDR

## ► latimea pulsurilor luminoase

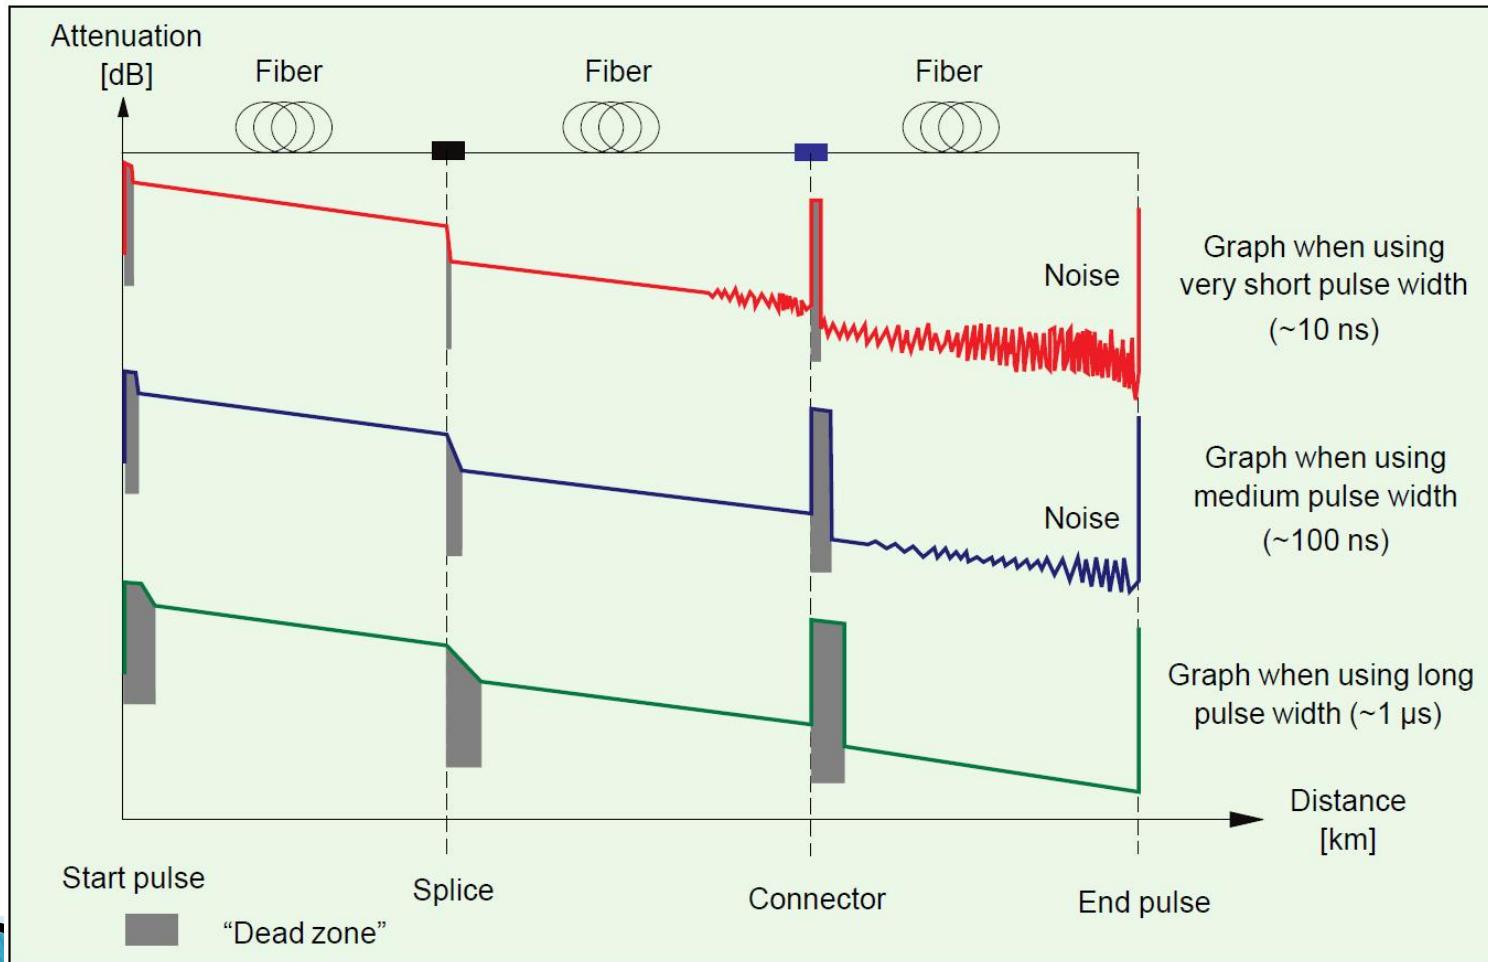



# OTDR

## Typical OTDR Trace

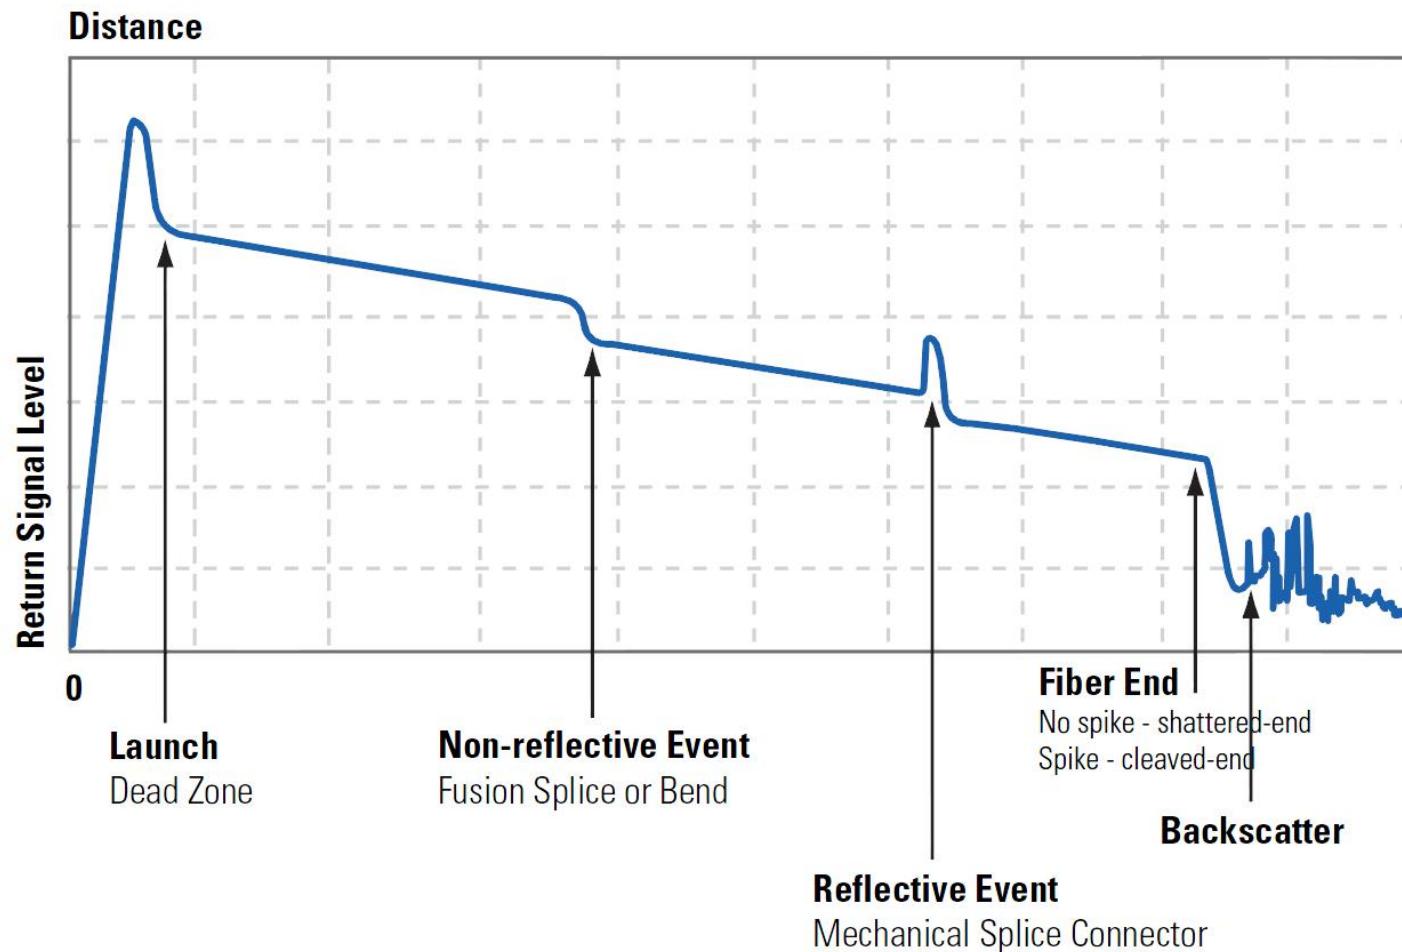

# Taiere - Cleaving



- ▶ Tehnici necesare pentru a asigura o taiere perpendiculara pe axa fibrei

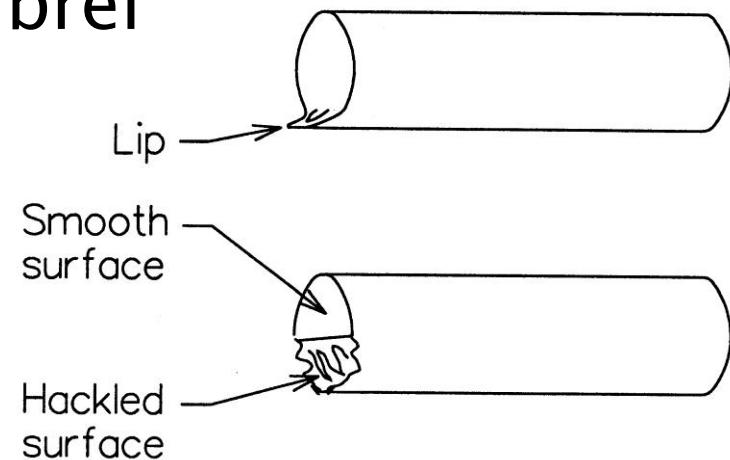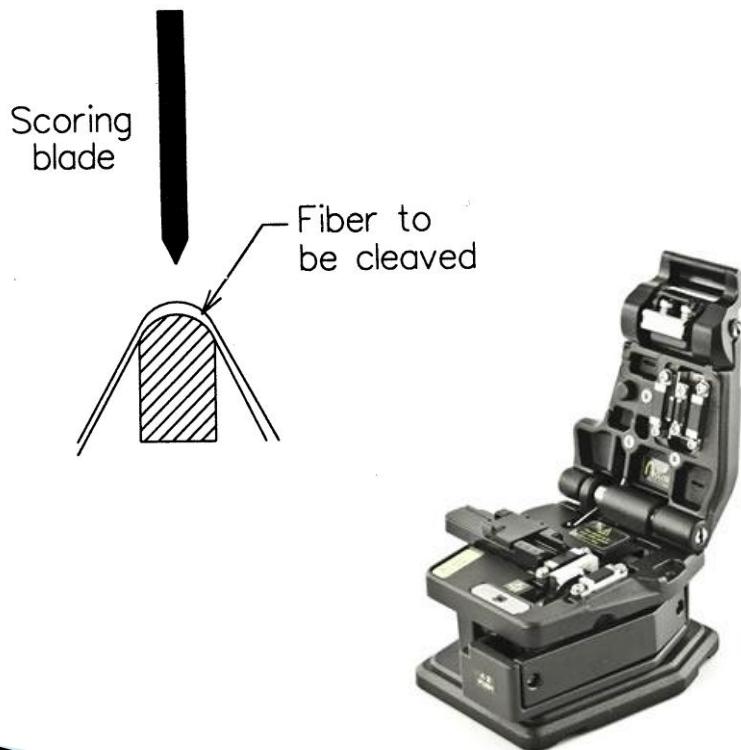

# Lipire prin fuziune




# Splice prin fuziune

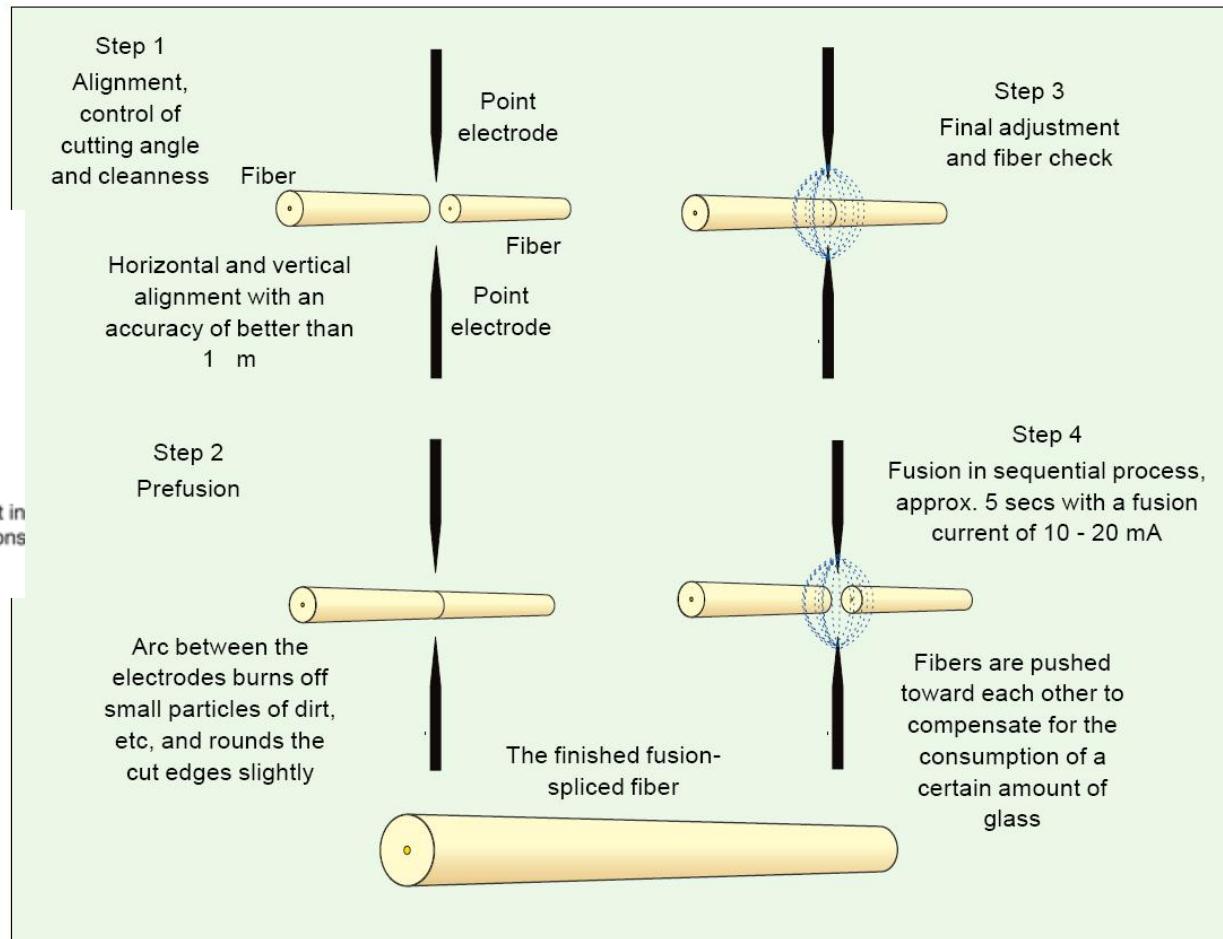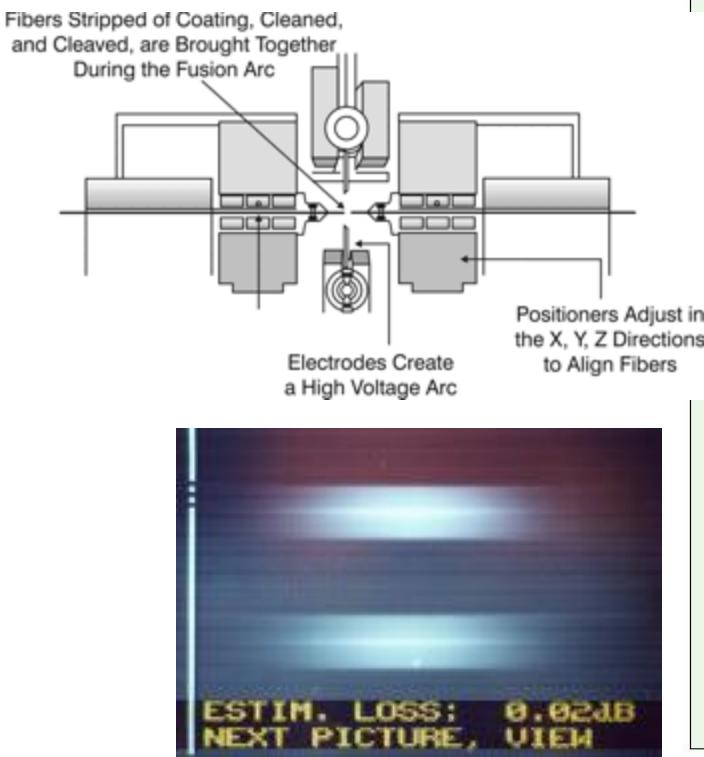


# Splice prin fuziune





Causes of faults in fiber fusion

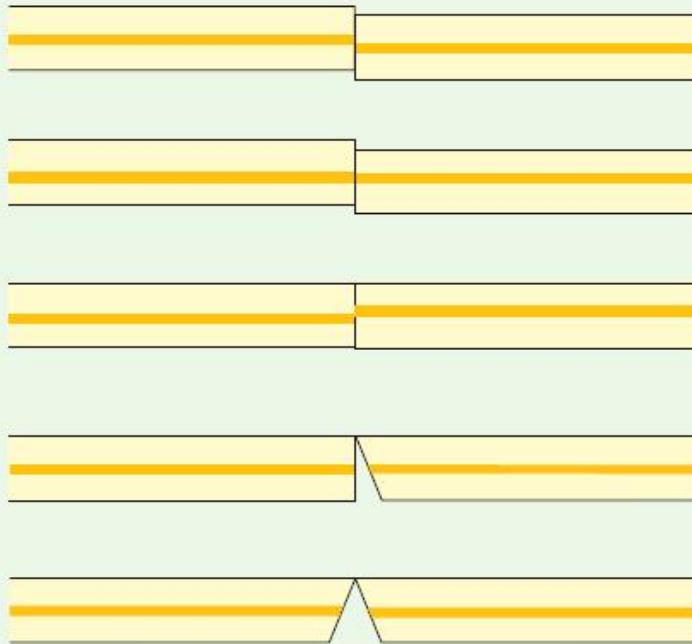


Appearance after fusion

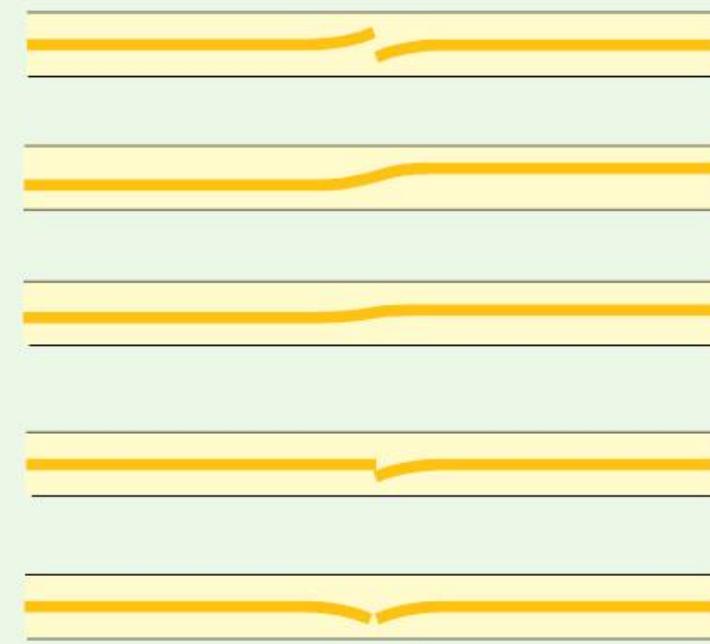



# Splice mechanic - bloc V

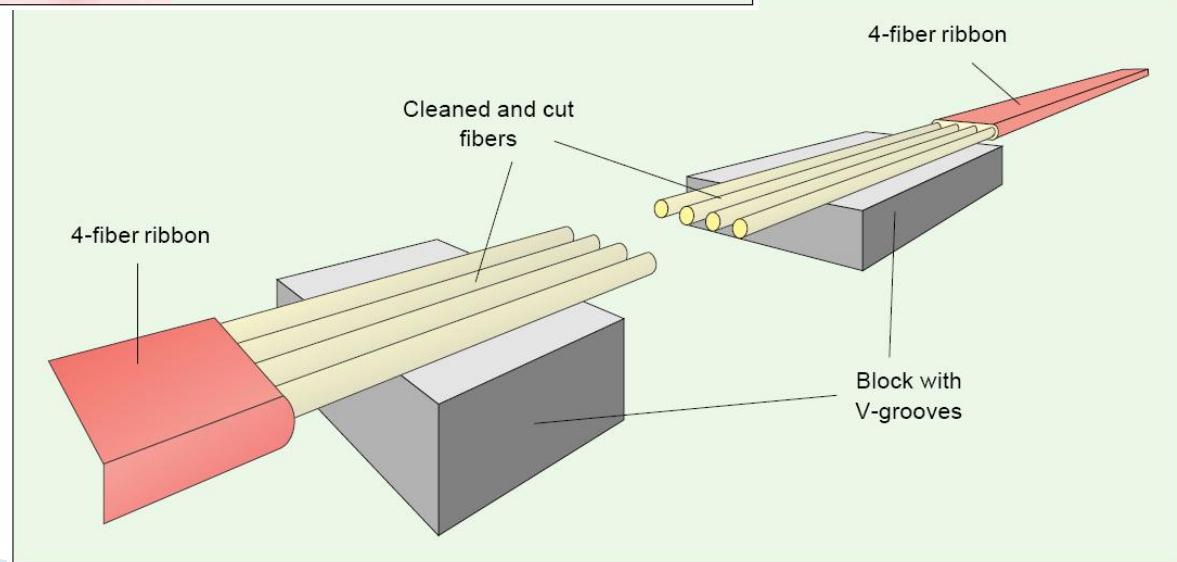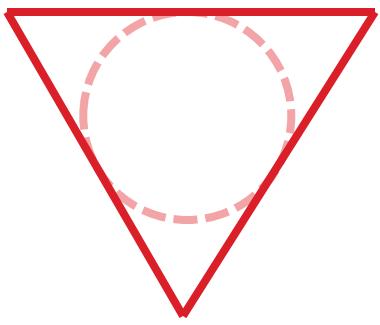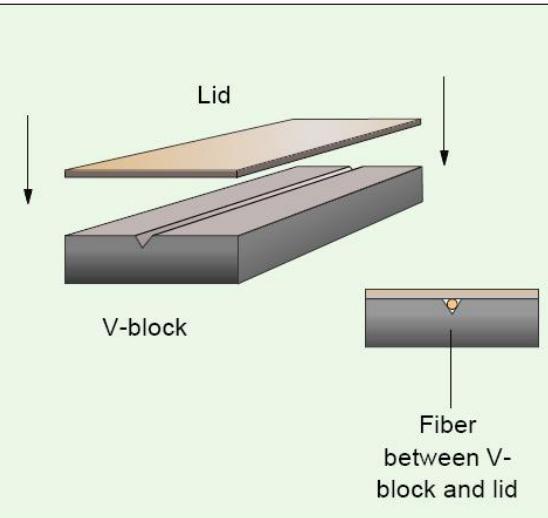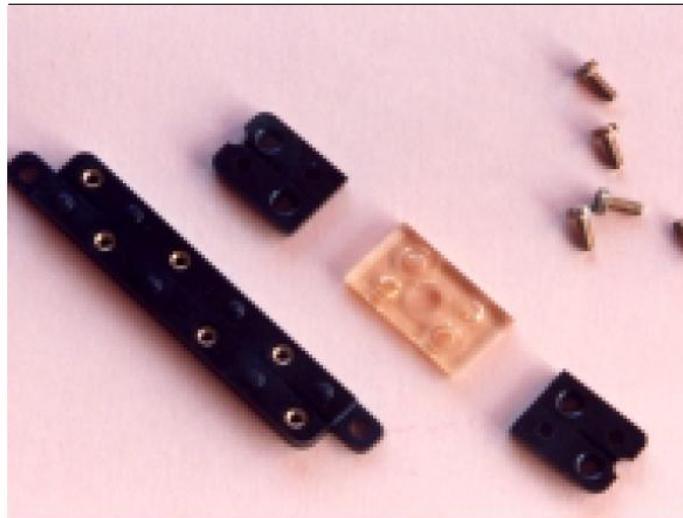

# Splice mechanic - bloc V

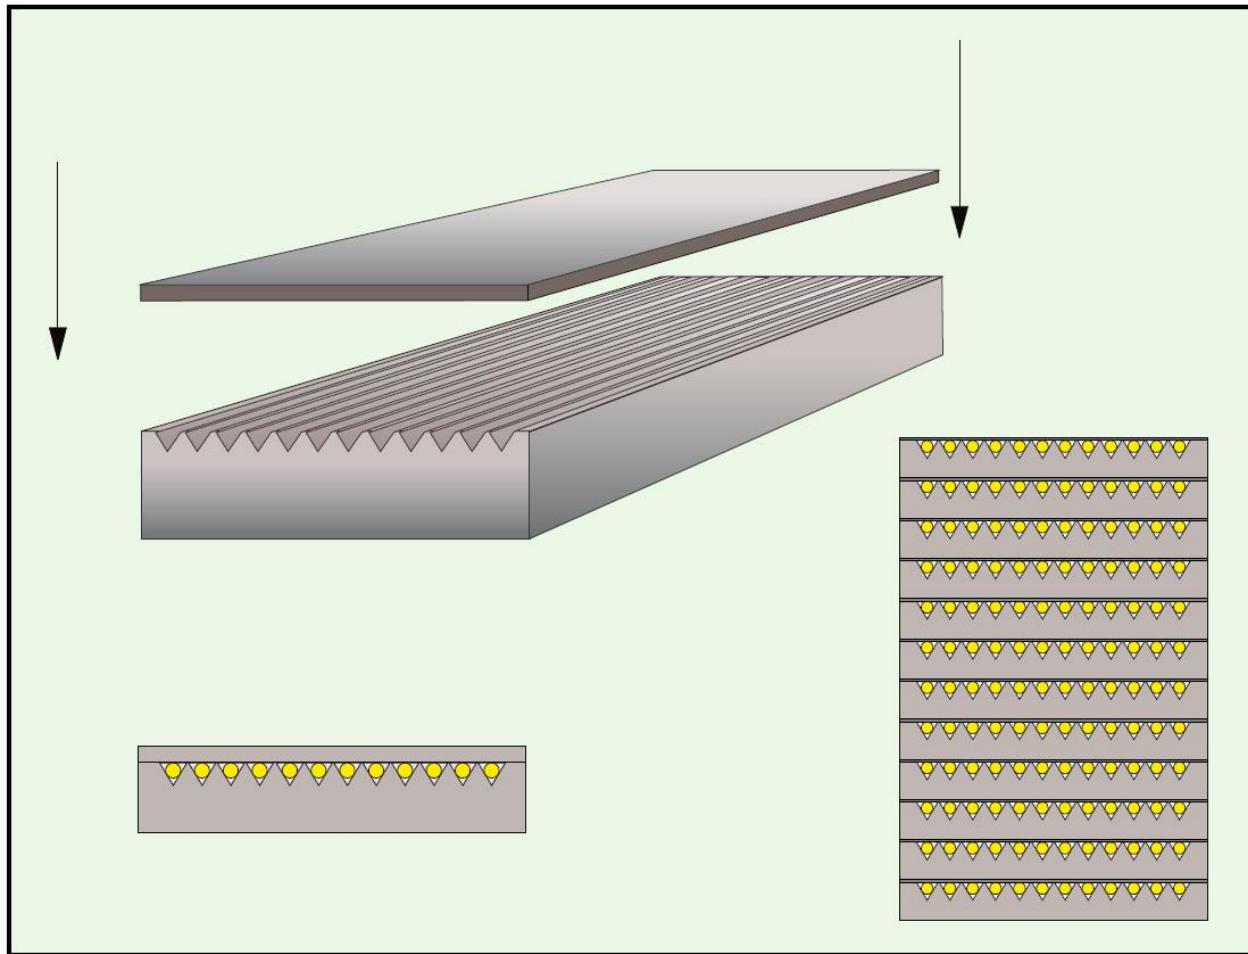


# Splice mechanic

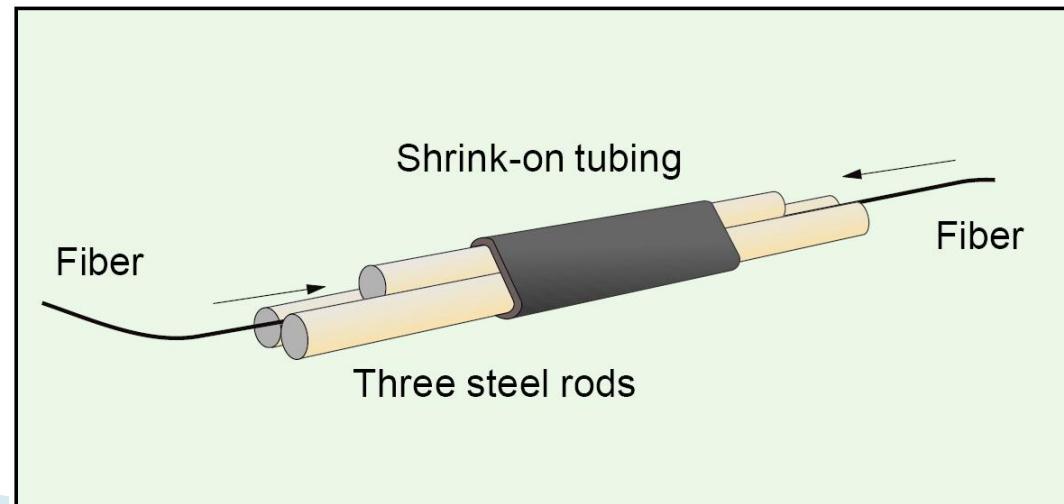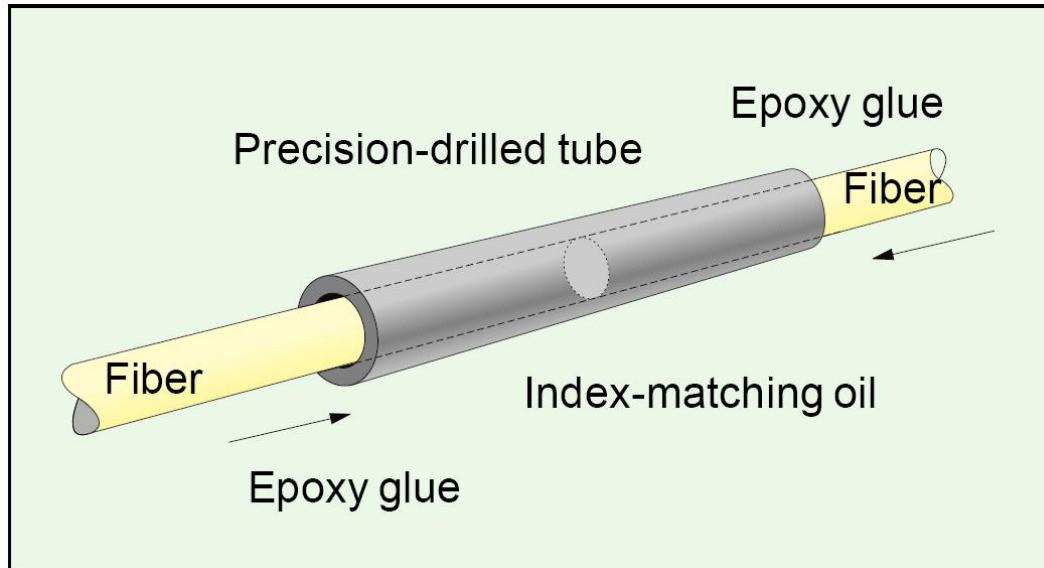

# Probleme Fibre/Conectori


Offset



Angular  
Misalignment



Separation




Core Eccentricity





Core Ellipticity





Reflections &  
Interference

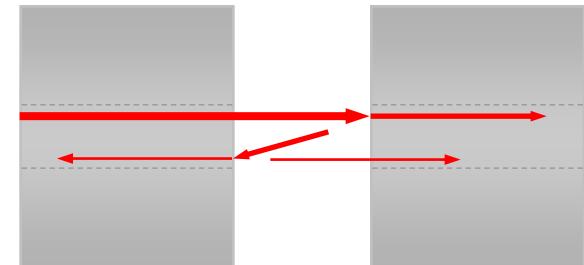


# Cabluri

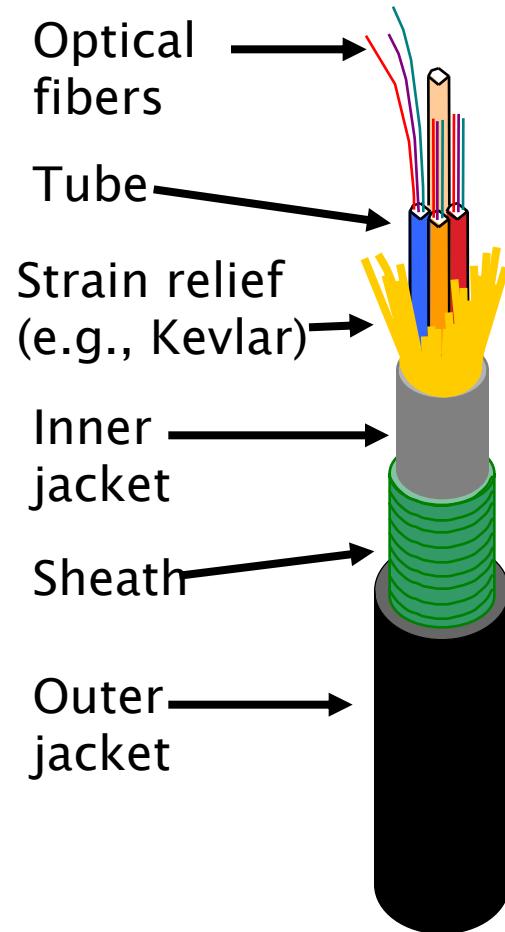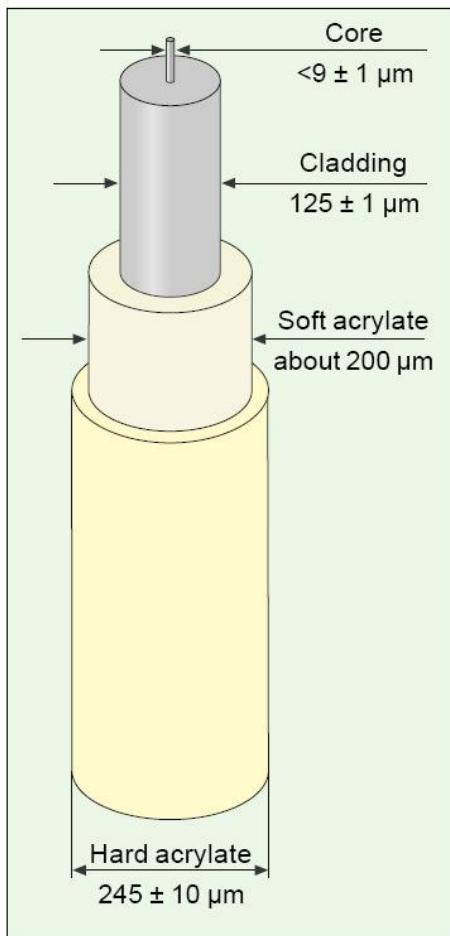

# Cabluri

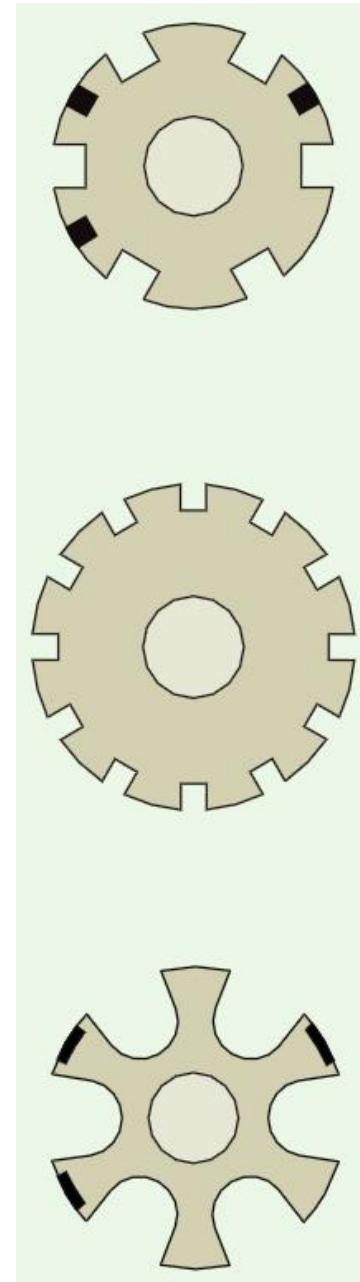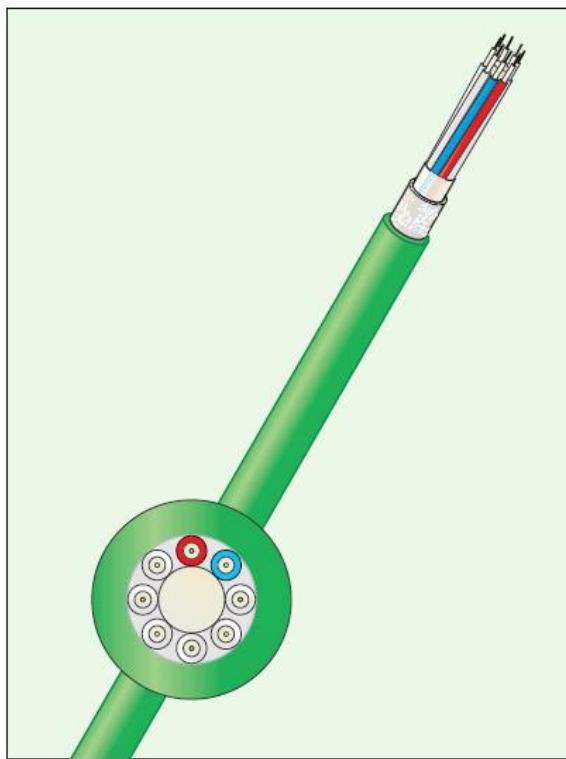


# Cabluri



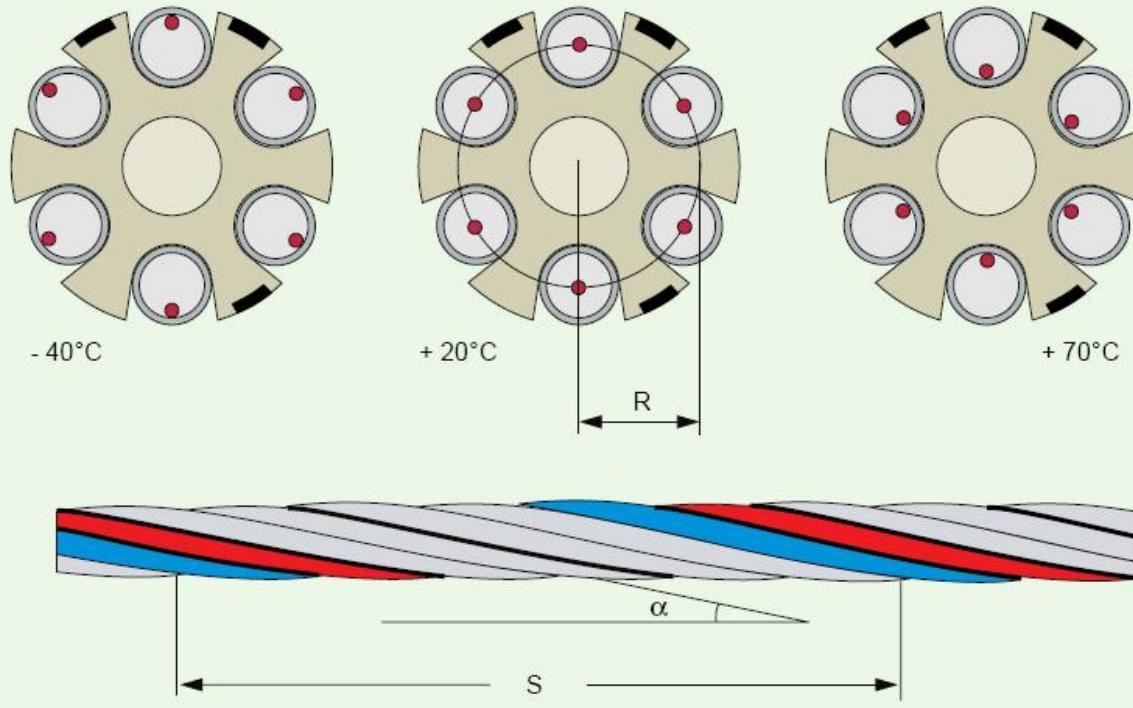


$$S' = S \cdot \sqrt{1 + \left( \frac{2\pi \cdot R}{S} \right)^2}$$

$$\frac{\Delta L}{L_0} = \sqrt{1 + \left( \frac{2\pi \cdot R}{S} \right)^2} - 1$$

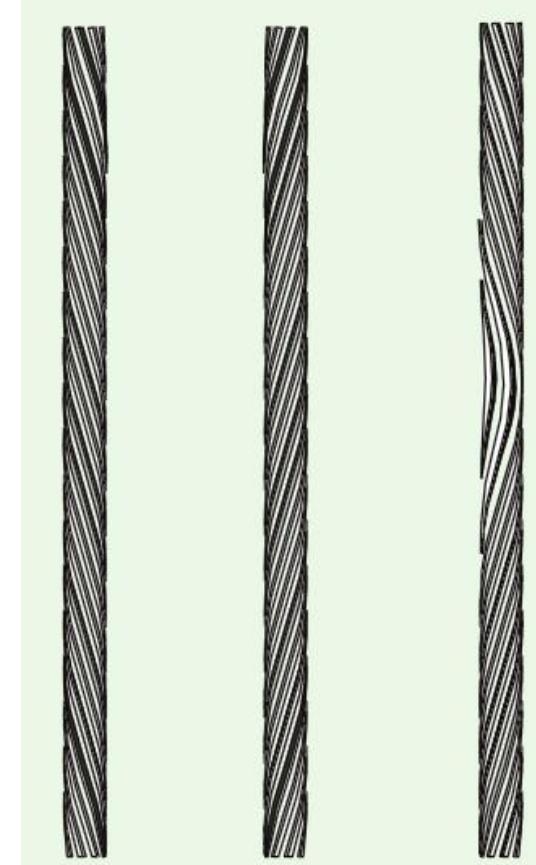

# Cabluri

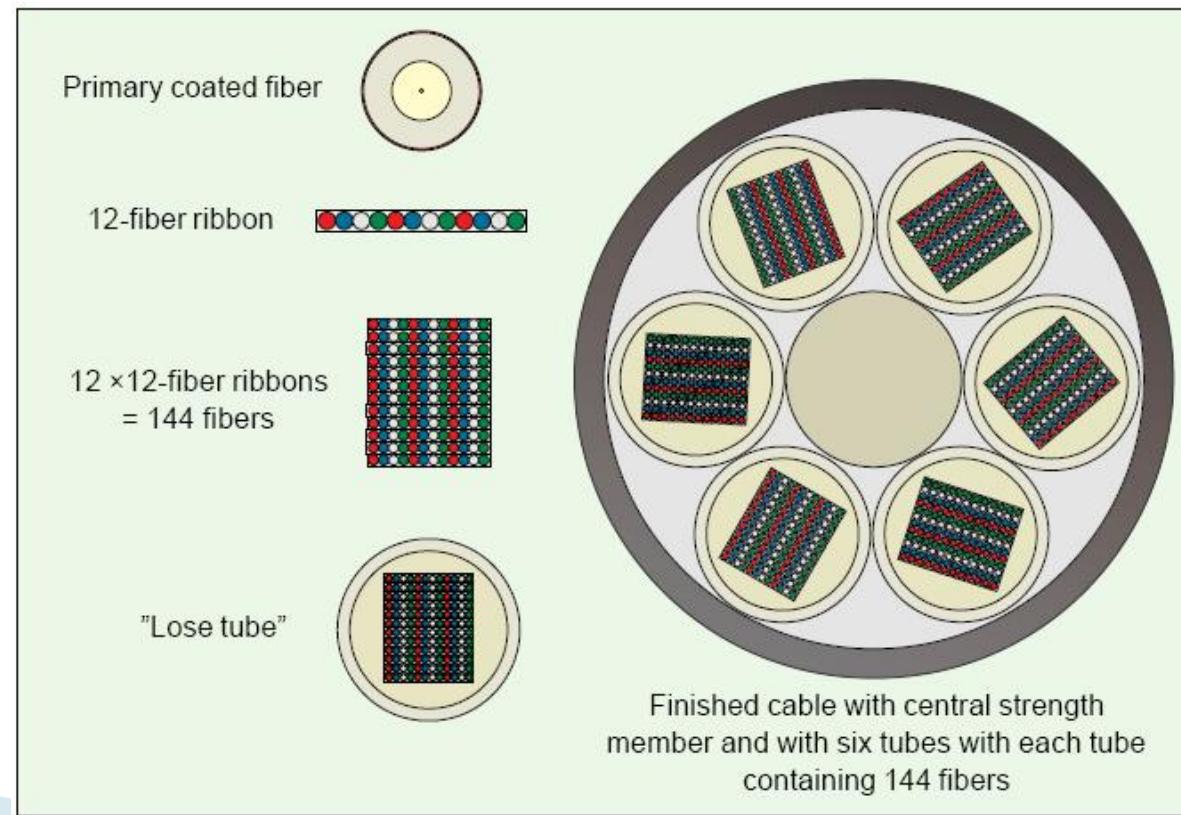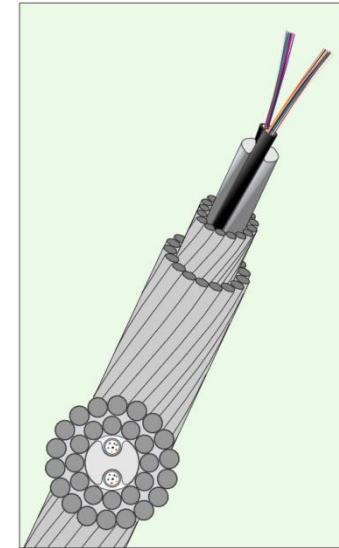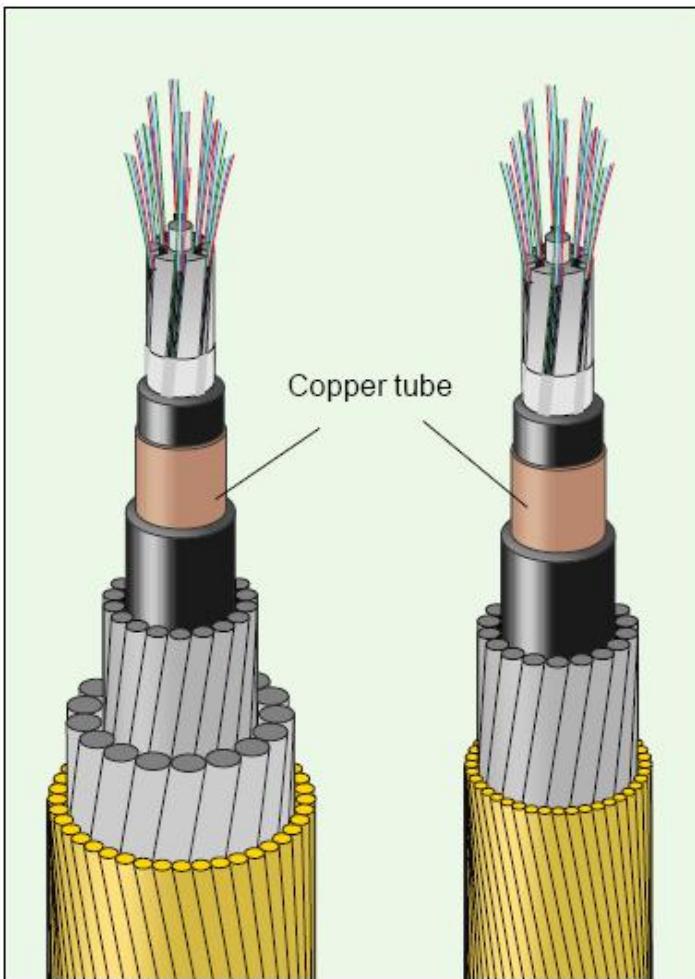

# Conecatori




# Conectori



**FC connector**



**MU connector**

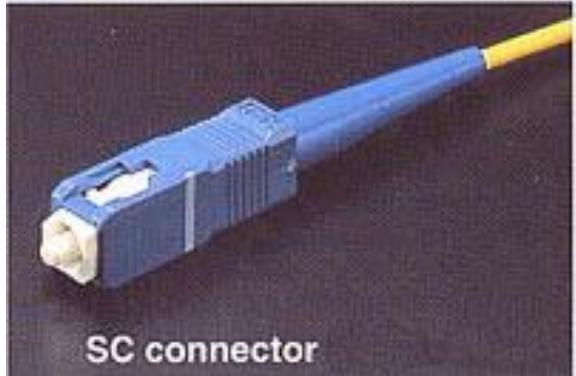

**SC connector**



**ST connector**




**ST**



**SMA Type 906**



**FC**



**SC**



**MIC**



**Fiber Jack**



**MT-RJ**

All fiber-optic connectors use ferrules to hold the ends of the fiber and keep them properly aligned.

The ST connector uses a half-twist bayonet type of lock, while SMA and FC use threaded connections.

The SC uses a push-pull connector similar to common audio and video plugs and sockets.



The MIC is the standard FDDI connector.

The Fiber Jack connector attaches two fibers in a snap lock connector similar in size and ease of use as an RJ-45 connector.

MT-RJ is a popular connector for two fibers in a very small form factor.


# Conecatori

► Verificati <http://rf-opto.eti.tuiasi.ro>

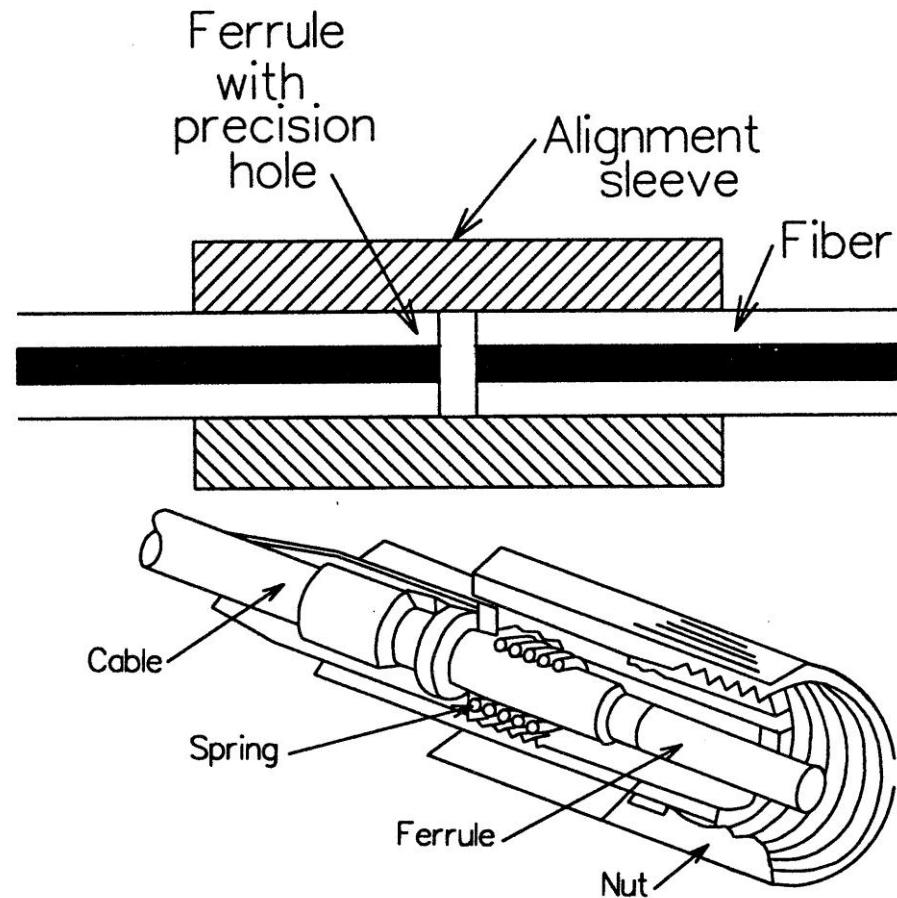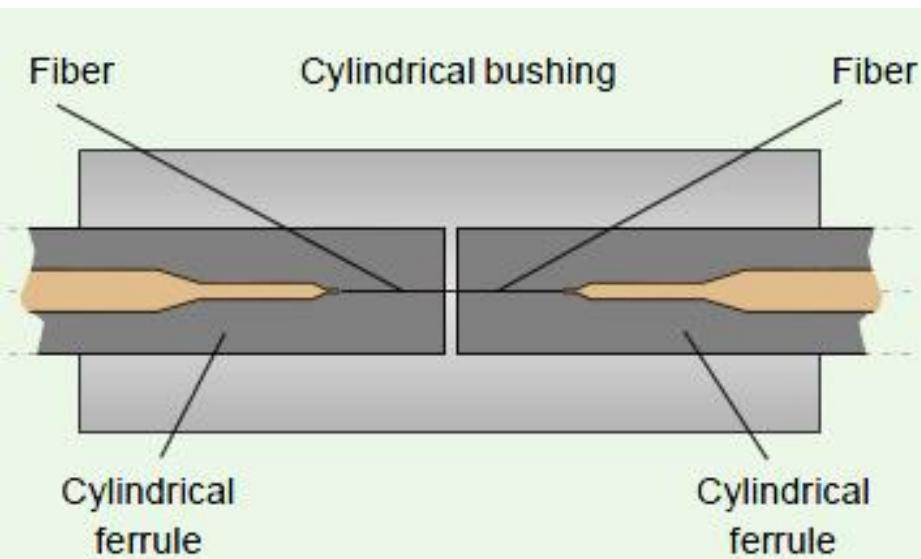


# Coneitori



- ▶ Ferula semisferica
  - 20mm
  - 60mm

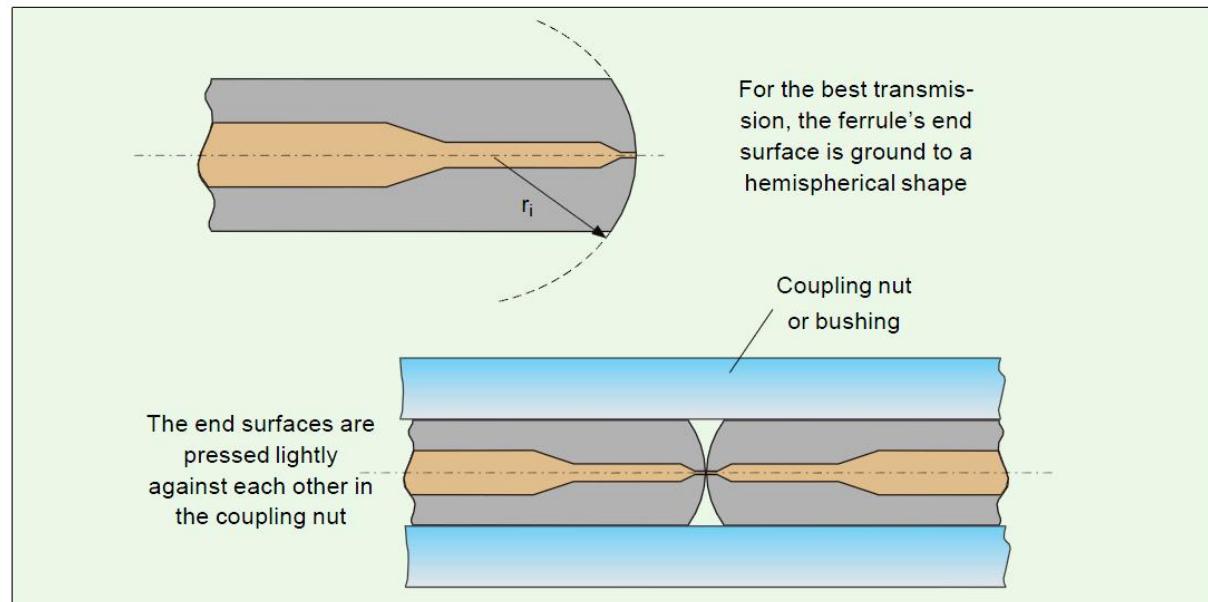

- ▶ Coneitori multifibra

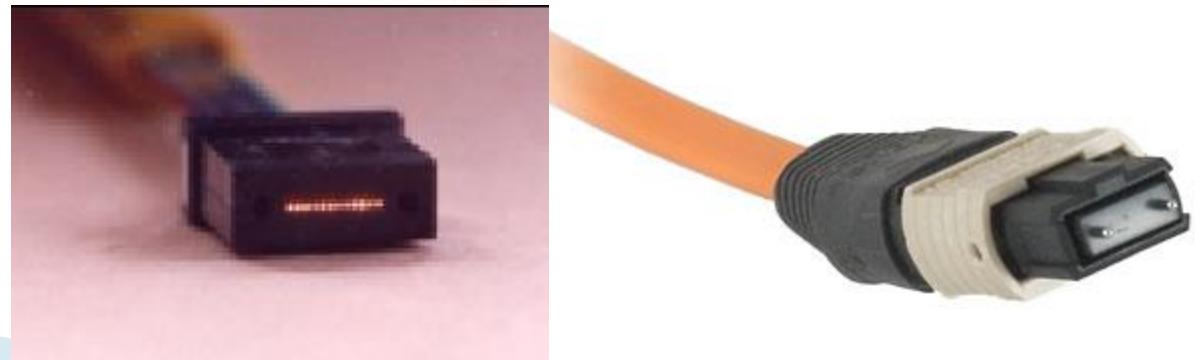


# Expanded beam connector

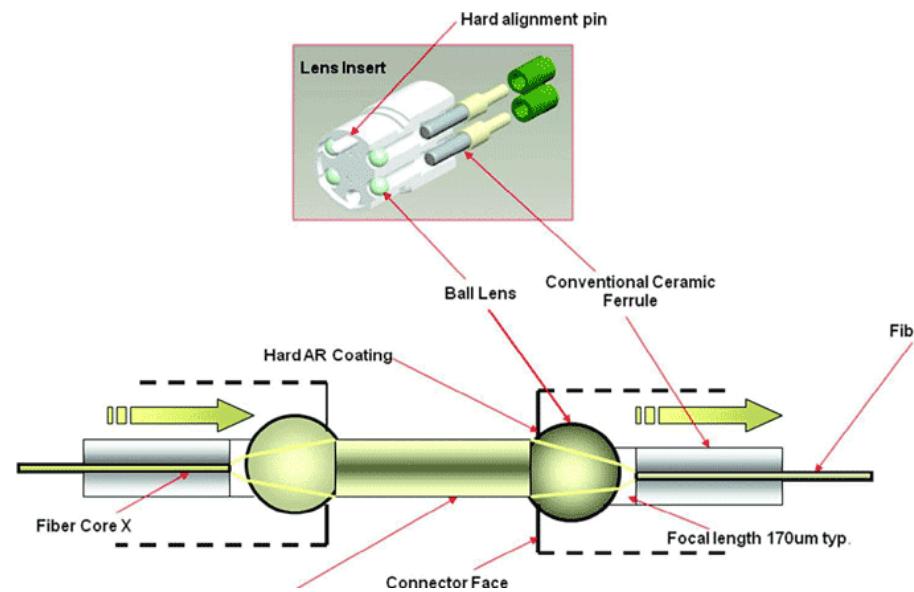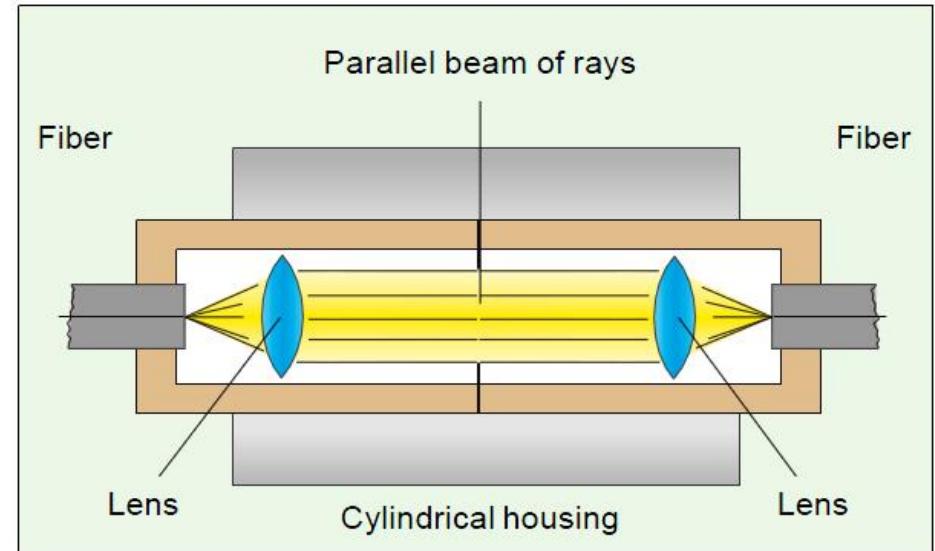

# FTTH

- ▶ FTTN: Fiber to the node, neighborhood
- ▶ FTTC: Fiber to the curb
- ▶ FTTB: Fiber to the building
- ▶ FTTH: Fiber to the home

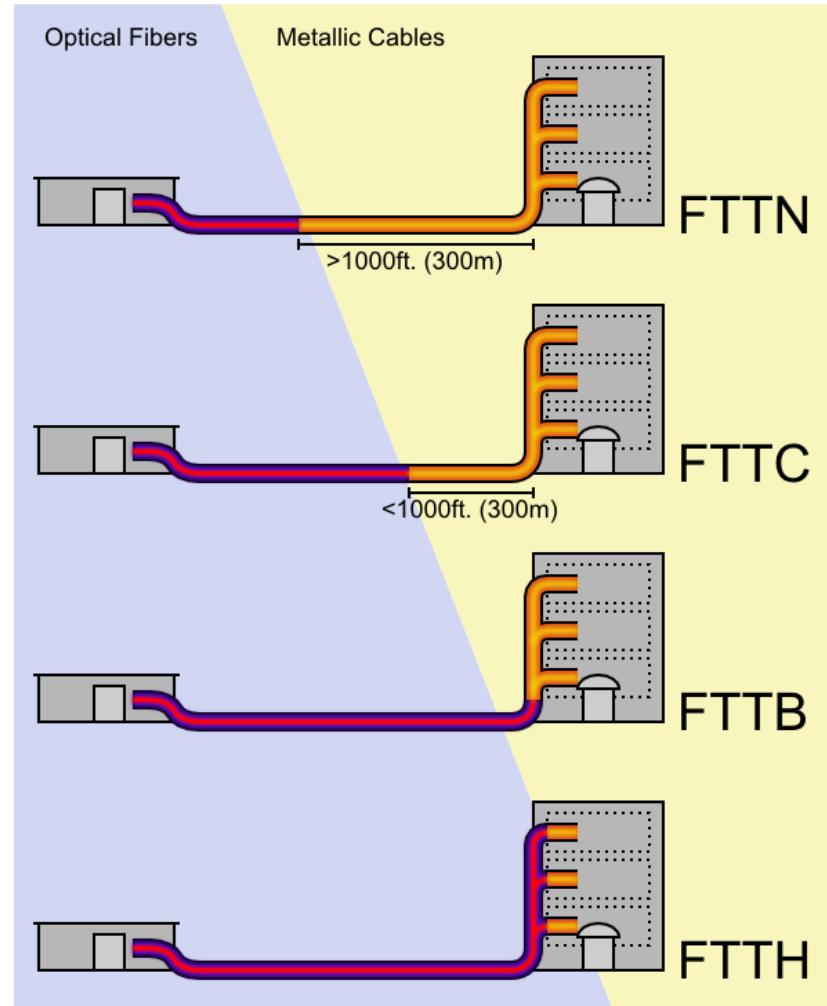

# FDDI

- ▶ Fiber Distributed Data Interface



# Cabluri, Conectori, rf-opto

Main **Courses** rf-opto.eti.tuiasi.ro says  
Request access! OK Educational software

Microwave CD Optoelectronics Communications Optoelectronic

[Curs 3 OPTO 2020](#) (pdf, 9.01 MB, ro, )  
[Curs 4 OPTO Fibra 2020](#) (pdf, 8.18 MB, ro, )  
[Curs Fibra](#) (video, prezenta prin interfata examen) (mp4, 215.77 MB, ro,

**Textbooks**

[IBM Redbooks - Understanding Optical Communications](#) (pdf, 5.24 MB, en, )  
[Behzad Razavi - Design of Integrated Circuits for Optical Communications](#) (pdf, 11.18 MB, en, )  
[John Powers - An Introduction to Fiber Optic Systems](#) (pdf, 50.54 MB, en, )  
[Stefan Nilsson-Gistvik - Optical Fiber Theory for Communication Networks](#) (pdf, 17.62 MB, en, )  
[Structuri Optoelectronice](#) (pdf, 3.13 MB, ro, )  
[EU Photovoltaic Geographical Information System \(PVGIS\)](#) (link, 0 Bytes, en, )  
[MIT Course - Fundamentals of Photovoltaics](#) (link, 0 Bytes, en, )

**Laboratory**

[Laborator 1](#) (pdf, 159.01 KB, ro, )  
[Laborator 2](#) (pdf, 269.94 KB, ro, )  
[Laborator 3](#) (pdf, 143.82 KB, ro, )  
[Laborator 4](#) (pdf, 156.42 KB, ro, )  
[Laborator 5](#) (pdf, 161.33 KB, ro, )  
[Laborator 6](#) (pdf, 138.19 KB, ro, )  
[Laborator 7](#) (pdf, 139.17 KB, ro, )


# **Dimensionarea unei legături pe fibra optică**

**Capitolul 6**

# Cuprins

- ▶ Lumina ca undă electromagnetică (ecuațiile lui Maxwell, ecuația undelor, parametrii de propagare)
- ▶ Elemente de fotometrie și radiometrie (mărimi energetice/luminoase)
- ▶ Fibra optică (realizare, principiu de funcționare, atenuare, dispersie, banda de frecvență)
- ▶ Cabluri optice (tehnologie, conectori, lipire – splice)
- ▶ **Proiectare sistemică a legăturii pe fibra optică** (bandă de frecvență, balanță puterilor)
- ▶ Emițătoare optice (LED și dioda laser – realizare fizică și funcționare)
- ▶ Receptoare optice (dioda PIN, dioda cu avalanșă – realizare fizică și funcționare)
- ▶ Amplificatoare transimpedanță (parametri, scheme tipice, TIA în buclă deschisă, cu reacție, diferențiale, control automat al câștigului)
- ▶ Realizarea circuitelor pentru controlul emițătoarelor optice (parametri, scheme tipice, controlul puterii, multiplexoare)
- ▶ Dispozitive de captare a energiei solare (principiu de funcționare, utilizare, proiectare )

# Limite putere/bandă a dispozitivelor optoelectronice

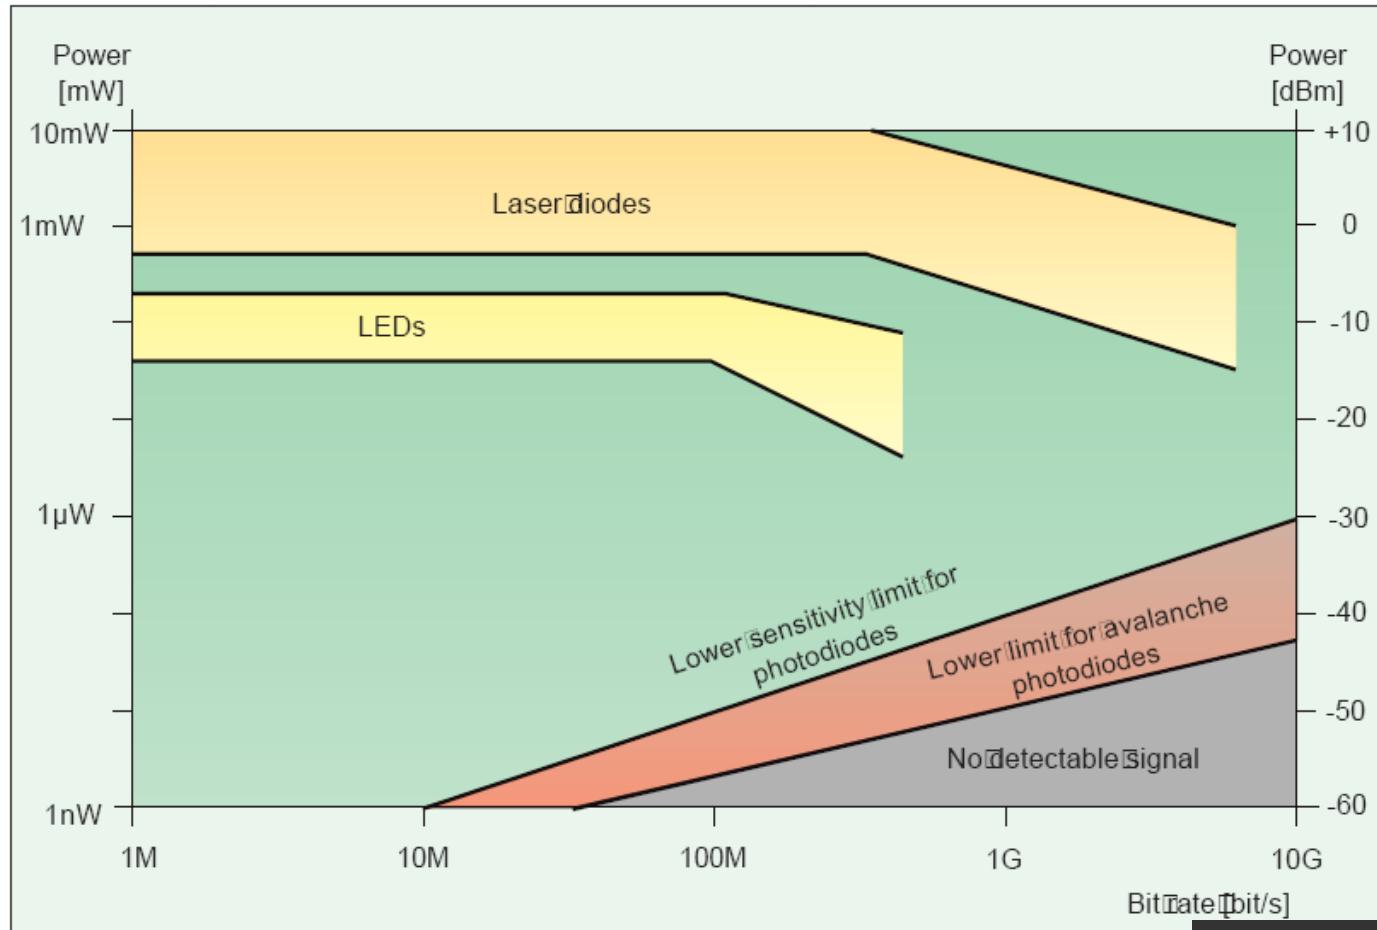


$$\text{dB} = 10 \cdot \log_{10} (P_2 / P_1)$$

$$\text{dBm} = 10 \cdot \log_{10} (P / 1 \text{ mW})$$

$$[\text{dBm}] + [\text{dB}] = [\text{dBm}]$$

# Legatura pe fibra optica

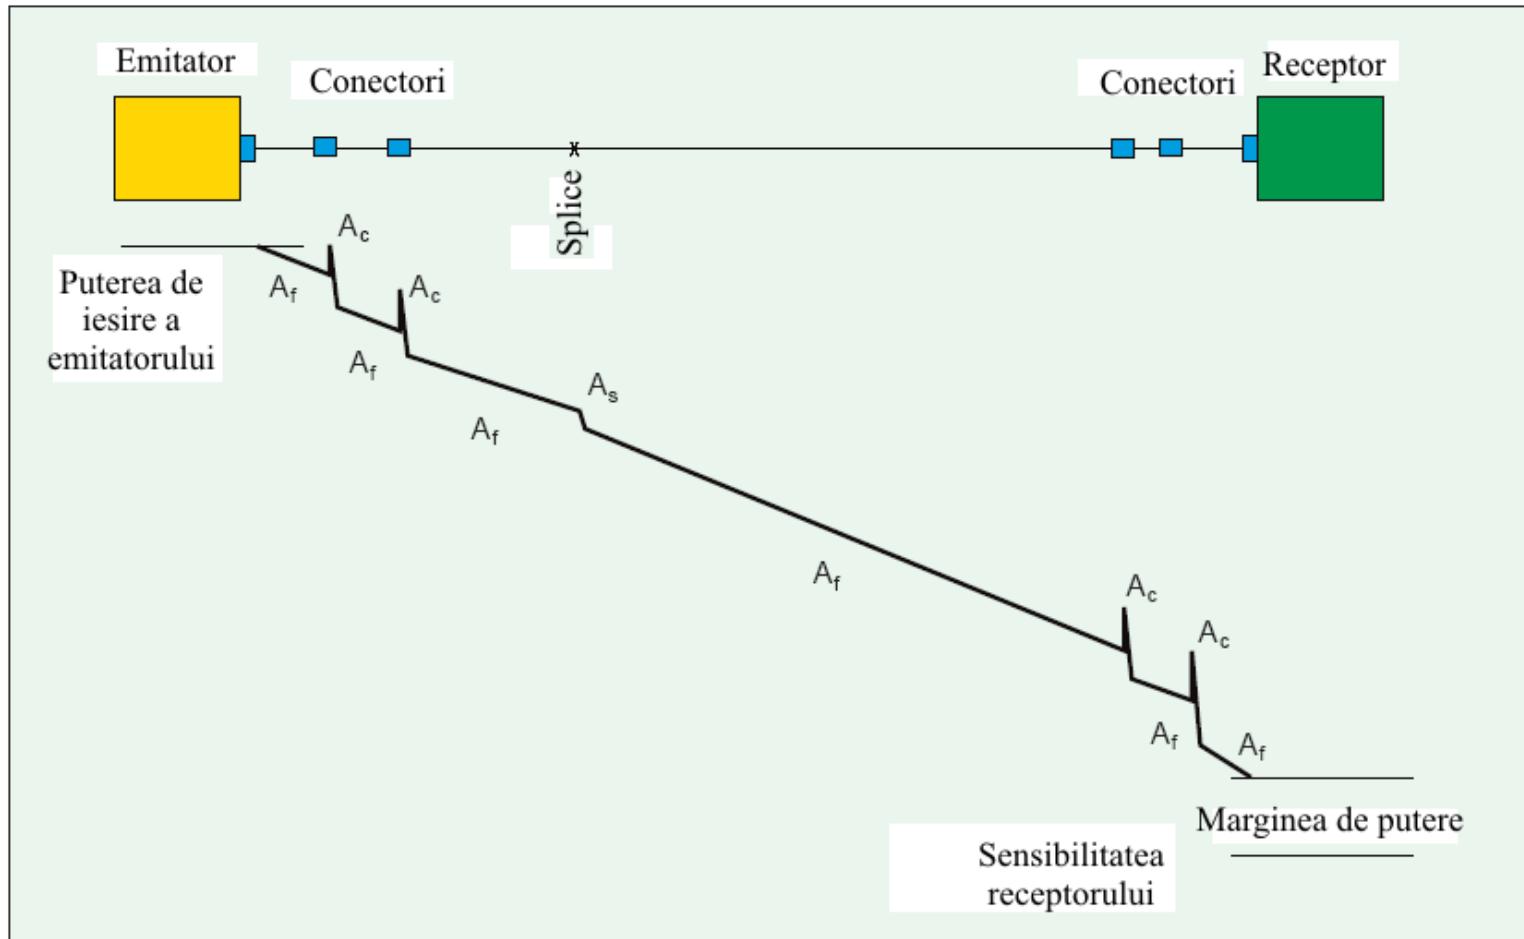


# Atenuare

- ▶ Macrocurburi
  - utilizator, **localizat**, dB
- ▶ Discontinuitate in fibra
  - utilizator, **localizat**, dB
- ▶ Microcurburi
  - **distribuit**, tehnologie, dB/km
- ▶ Imprastiere
  - **distribuit**, tehnologie, dB/km
- ▶ Absorbtie
  - **distribuit**, material, dB/km

# Pierderi – Apertura numerica

- ▶ **Numai** la trecerea de la apertura numerica mai mare la apertura numerica mai mica

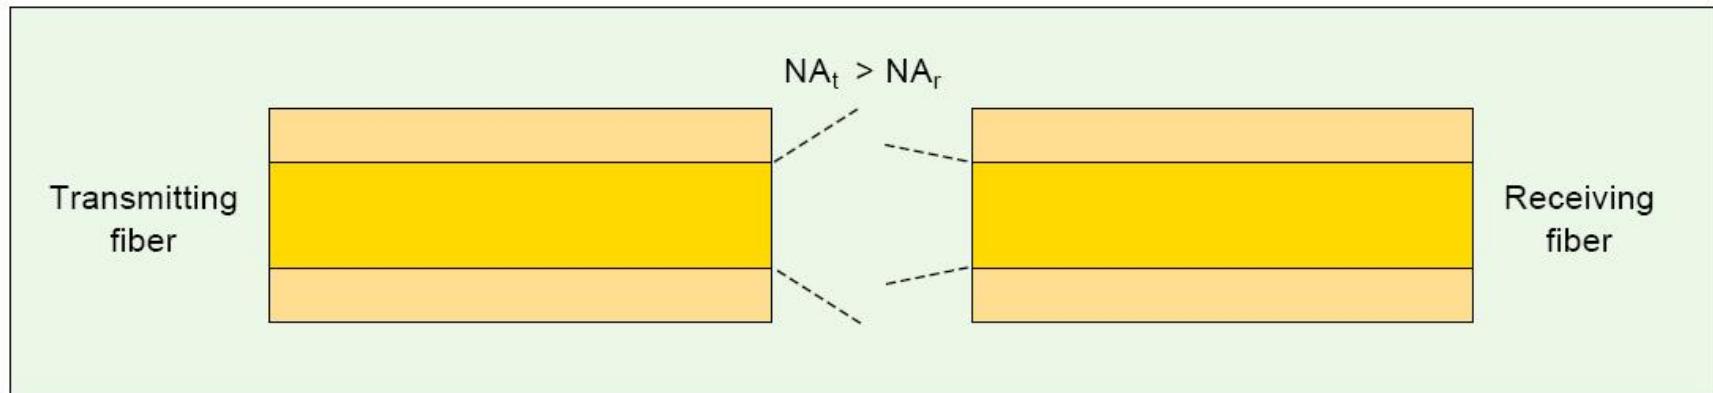


$$\text{Atenuare}_{\text{NA}}[\text{dB}] = -10 \cdot \log_{10} \left( \frac{NA_r}{NA_t} \right)^2$$

numai pentru  $NA_r < NA_t$

$\text{Atenuare}_{\text{NA}}[\text{dB}] > 0$

# Pierderi - Diametrul miezului

- ▶ **Numai** la trecerea de la diametru mai mare la diametru mai mic (multimod)
- ▶ **Bidirectional** (monomod)

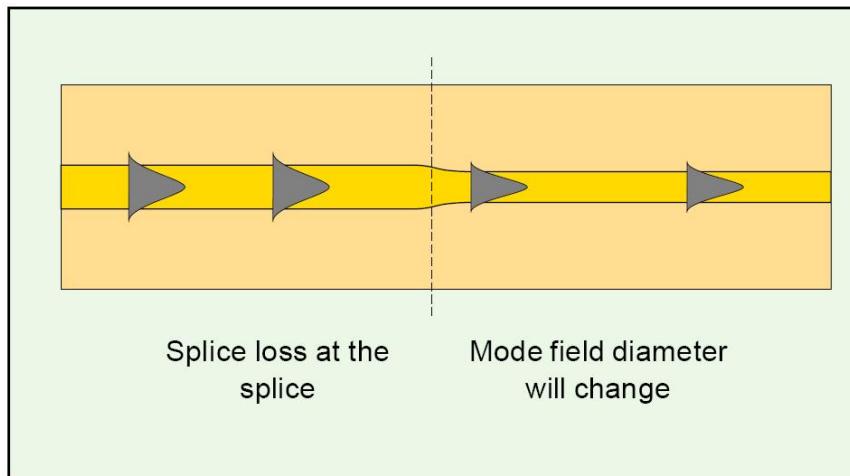

- ▶ **multimod**

$$\text{Atenuare}_{\Phi} [\text{dB}] = -10 \cdot \log_{10} \left( \frac{\phi_r}{\phi_t} \right)^2$$

numai pentru  $\Phi_r < \Phi_t$

- ▶ **monomod**

$$\text{Atenuare}_{\Phi} [\text{dB}] = -20 \cdot \log_{10} \left( \frac{2 \cdot w_1 \cdot w_2}{w_1^2 + w_2^2} \right)$$


bidirectional  $\forall w_1, w_2$

**w = MFD !!**

$$\text{Atenuare}_{\Phi} [\text{dB}] > 0$$

# Pierderi


► multimod

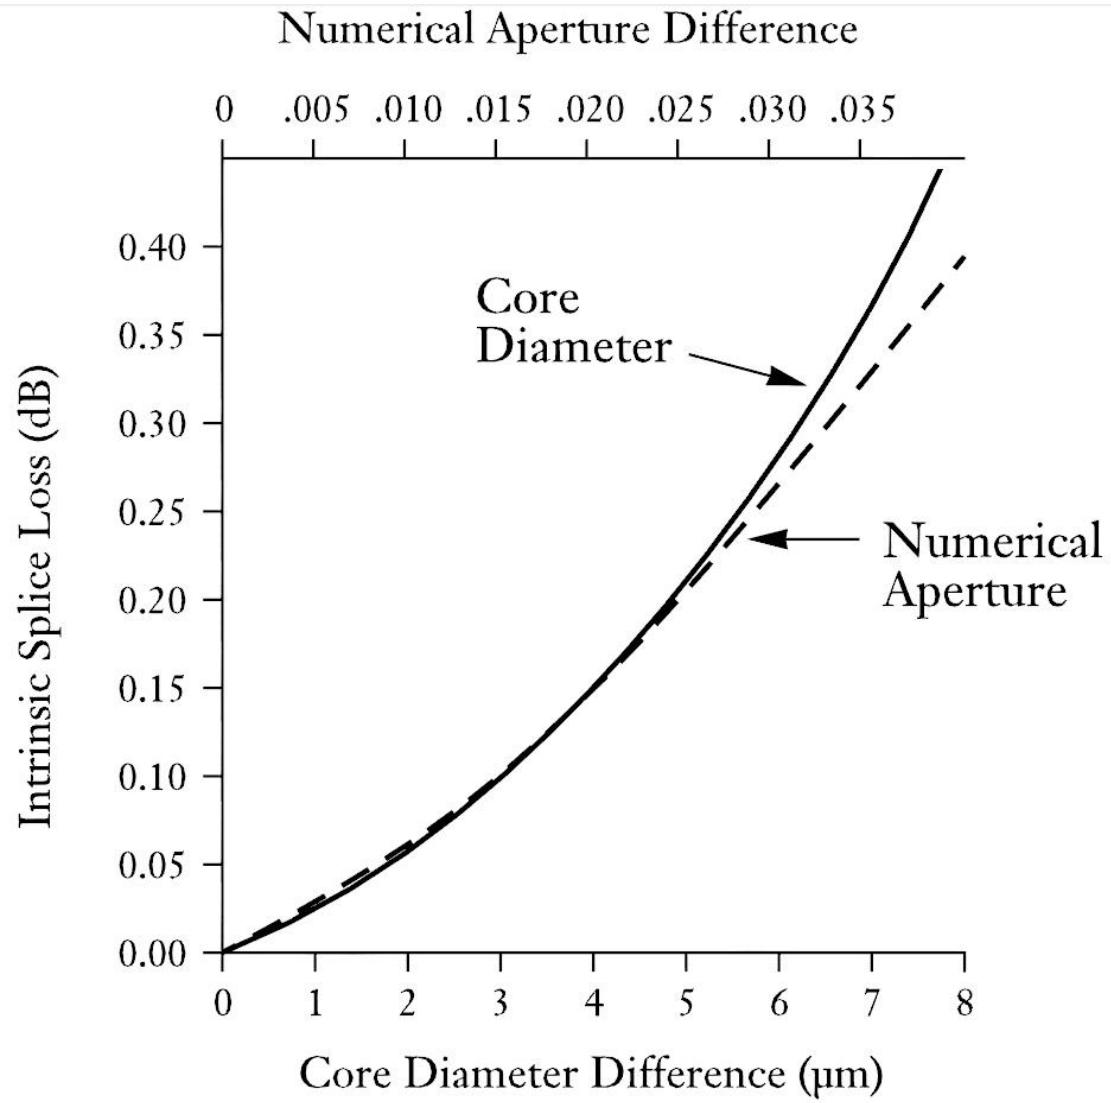

# Pierderi


## ▶ monomod

- predomina pierderile datorate diferențelor de MFD
- se poate neglijă NA
- **Bidirectional** (MFD mic → mare și mare → mic)


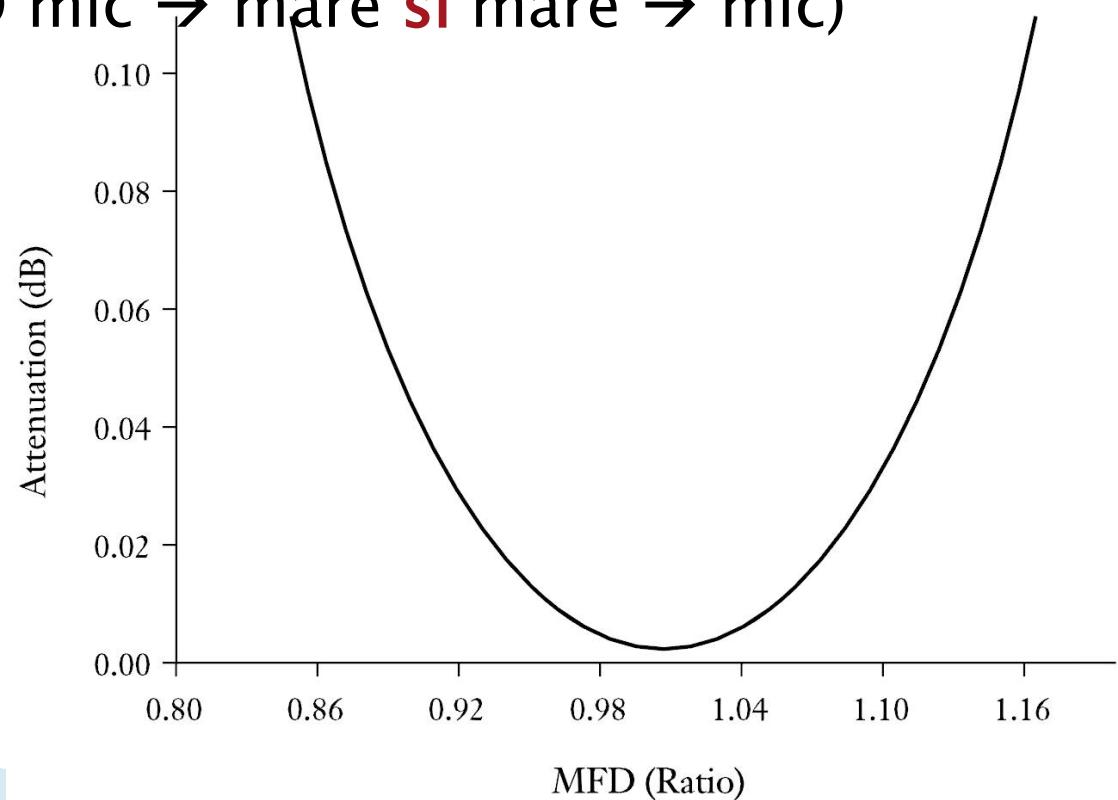


# Pierderi


- ▶ monomod
- ▶ tipic: cel mai dezavantajos pentru MFD =  $9.3 \pm 0.5 \mu\text{m}$  →  $A=0.04\text{dB}$

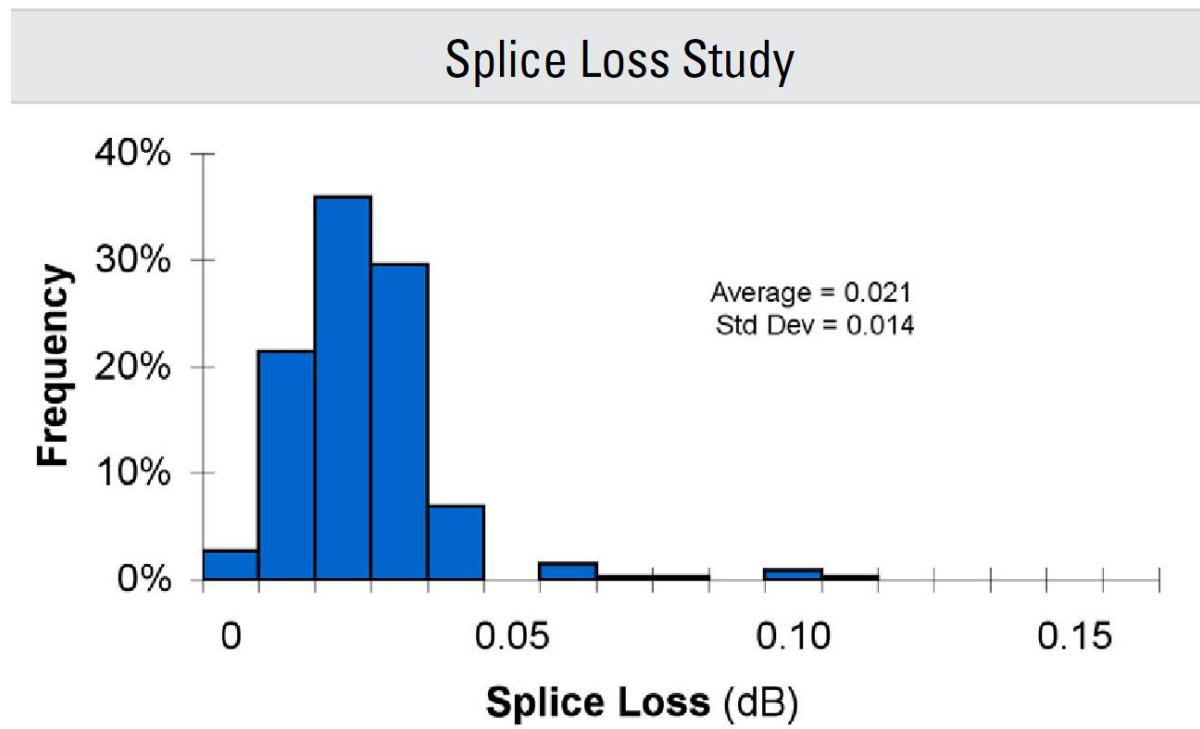

# Pierderi - Nealinierea axelor

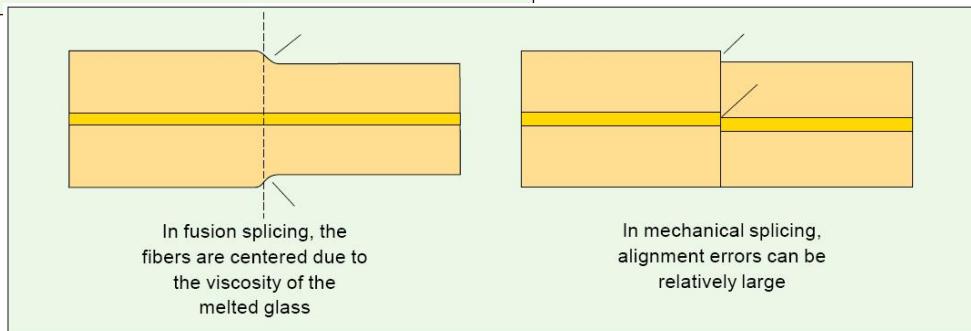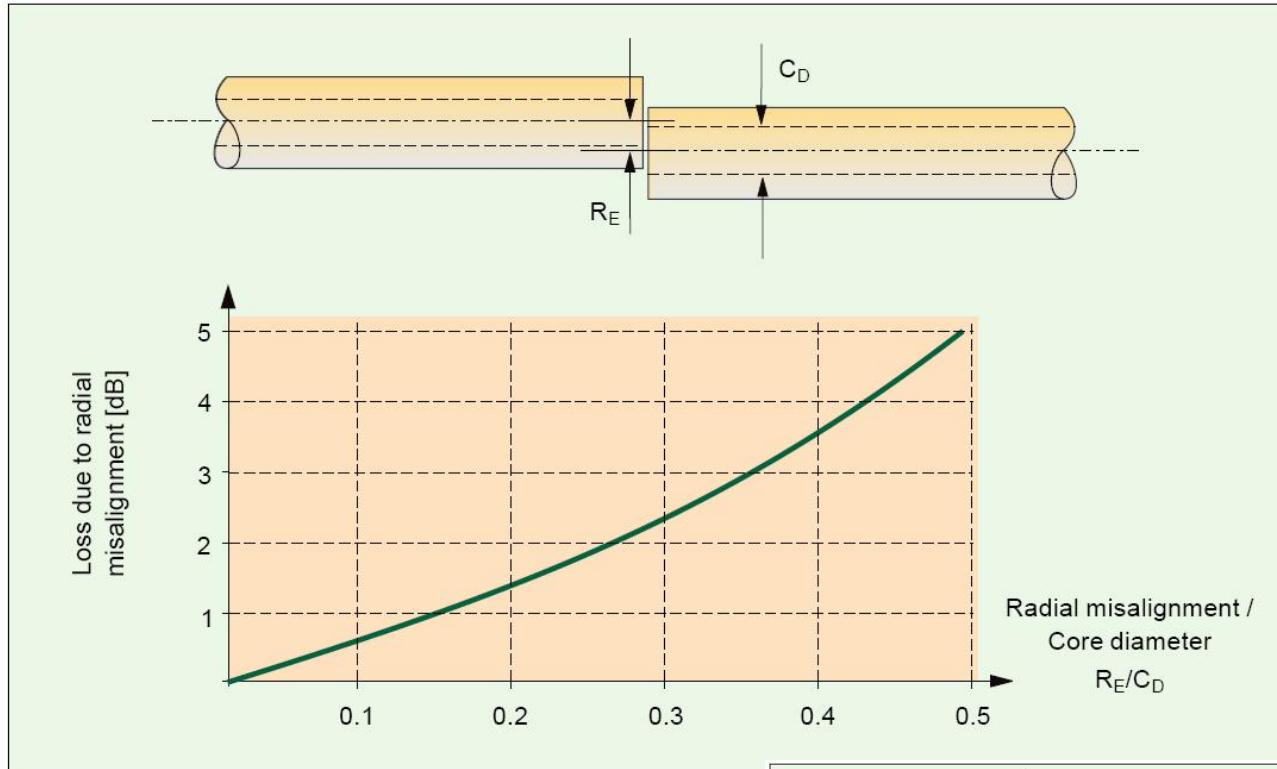


# Pierderi - unghi

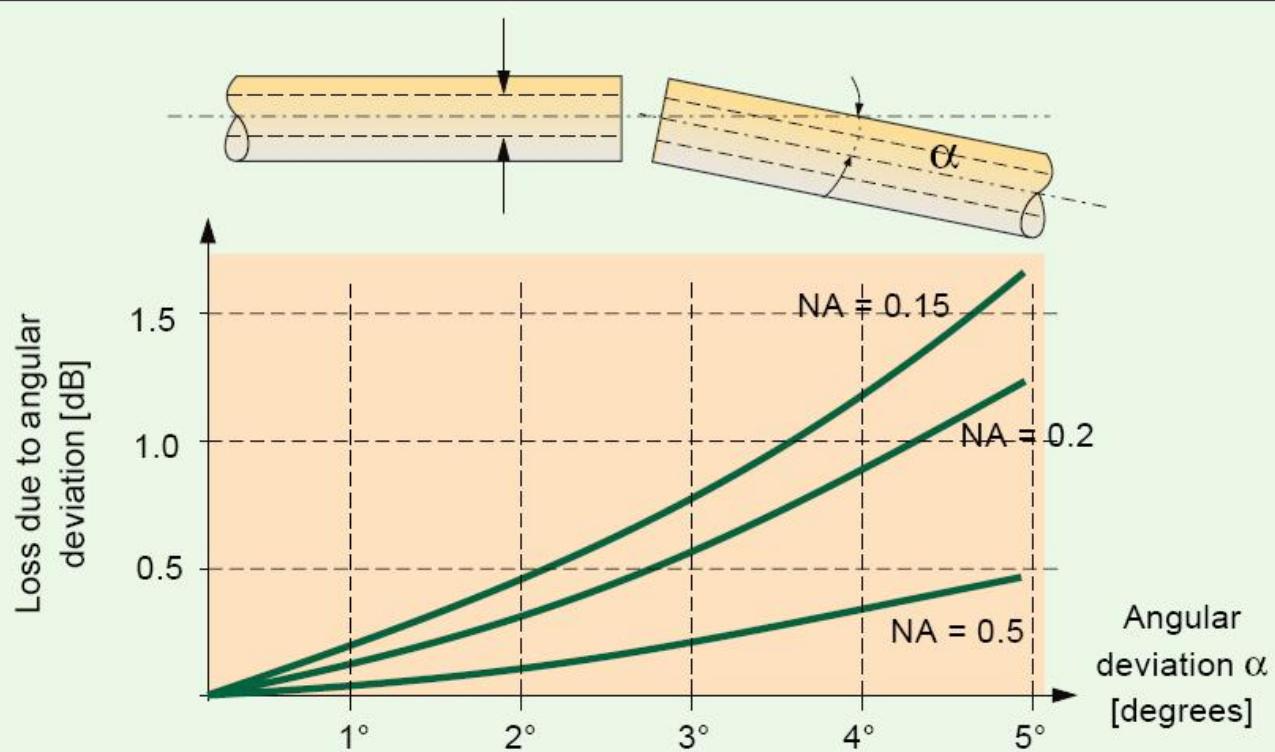

# Pierderi – distanță

- ▶ Se foloseste un gel cu indice de refractie egal cu al fibrelor
- ▶ Se aduna pierderile generate de reflexie pe o lamela (pana la 16%)

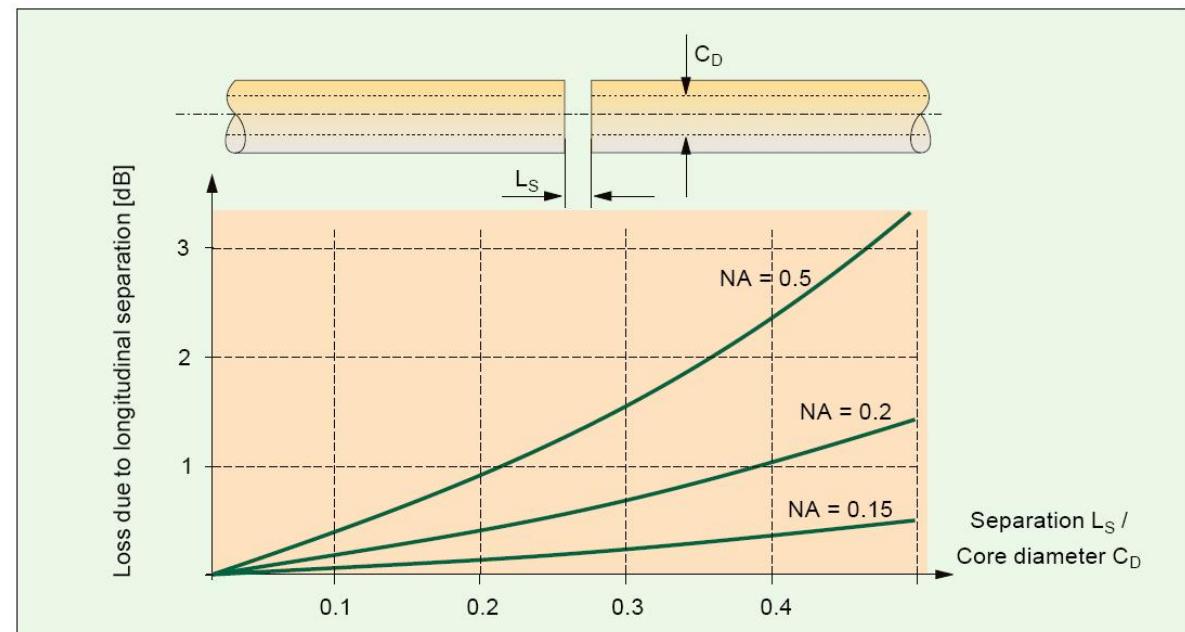

# Exemplu

- ▶ Trebuie să realizați o legătură pe fibră optică pe o distanță de 50 km la o viteză de 1Gb/s.

Emițători: = 1.5mW ( $\Delta\lambda=2\text{nm}$ , diverse $\lambda$ )	NA = 0.17	$\Phi = 13\mu\text{m}$
Pierderi splice (tehnologie)	0.15 dB/splice	
Pierderi conector	0.5 dB/conector	
Cablu conexiune: L = 20m	NA = 0.12	fibră: 11/125 $\mu\text{m}$
Cablu conexiune: L = 20m	NA = 0.15	fibră: 11/125 $\mu\text{m}$
Fibra 1	8 X 5km	
Fibra 2	4 X 10km	
Fibra 3	8 X 5km	
Fibra 4	4 X 10km	
Receptor: Sensitivitate = 1 $\mu\text{W}$	NA = 0.25	$\Phi = 30\mu\text{m}$

# Catalog

## Optical Specifications

### Fibra nr. 3

#### Fiber Attenuation

Wavelength (nm)	Maximum Attenuation (dB/km)
1310	0.33 ± 0.35
1383**	0.31 ± 0.35
1490	0.21 ± 0.24
1550	0.19 ± 0.20
1625	0.20 ± 0.23

\*Maximum specified attenuation value available within the stated ranges.

\*\*Attenuation values at this wavelength represent post-hydrogen aging performance.

Alternate attenuation offerings available upon request.

#### Attenuation vs. Wavelength

Range (nm)	Ref. $\lambda$ (nm)	Max. $\alpha$ (dB/km)	Difference (nm)
1285 – 1330	1310	0.03	
1525 – 1575	1550	0.02	

The attenuation in a given wavelength range does not exceed the attenuation of the reference wavelength ( $\lambda$ ) by more than the value  $\alpha$ .

#### Mandrel Loss

Mandrel (mm)	Number of Turns	Wavelength (nm)	Induced Attenuation* (dB)
32	1	1550	±0.03
50	100	1310	±0.03
50	100	1550	±0.03
60	100	1625	±0.03

\*The induced attenuation due to fiber wrapped around a mandrel of a specified diameter.

#### Point Discontinuity

Wavelength (nm)	Point Discontinuity (dB)
1310	±0.05
1550	±0.05

## Dimensional Specifications

#### Glass Geometry

Fiber Curl	≤ 4.0 in radius of curvature
Cladding Diameter	125.0 ± 0.7 $\mu\text{m}$
Core-Clad Concentricity	≤ 0.5 $\mu\text{m}$
Cladding Non-Circularity	≤ 0.7%

#### Environmental Specifications

Environmental Test	Test Condition	Induced Attenuation 1310 nm, 1550 nm & 1625 nm (dB/km)
Temperature Dependence	-60°C to +85°C*	±0.05
Temperature Humidity Cycling	-10°C to +85°C* up to 98% RH	±0.05
Water Immersion	23° ± 2°C	±0.05
Heat Aging	85° ± 2°C*	±0.05

\*Reference temperature = +23°C.

Operating Temperature Range: -60°C to +85°C.

#### Cable Cutoff Wavelength ( $\lambda_{ccf}$ )

$\lambda_{ccf} \leq 1260 \text{ nm}$

#### Mode-Field Diameter

Wavelength (nm)	MF D ( $\mu\text{m}$ )
1310	9.4 ± 0.4
1550	10.6 ± 0.5

#### Dispersion

Wavelength (nm)	Dispersion Value [ps/(nm·km)]
1550	±18
1625	±23

Zero Dispersion Wavelength ( $\lambda_0$ ): 1310 nm ≤  $\lambda_0$  ≤ 1324 nm  
Zero Dispersion Slope ( $S_d$ ): ± 0.09 ps/(nm<sup>2</sup>·km)

#### Polarization Mode Dispersion (PMD)

PMD Link Design Value	Value (ps/v/km)
	±0.06*

Maximum Individual Fiber: ±0.2

\*Complies with IEC 60794-3, 2001, Section 5.5, Method 1, September 2001.

The PMD link design value is a term used to describe the PMD of concatenated lengths of fiber (also known as PMD<sub>0</sub>). This value represents a statistical upper limit for total link PMD. Individual PMD values may change when cabled. Corning's fiber specification supports network design requirements for a 0.5 ps/km maximum PMD.

#### Coating Geometry

Coating Diameter	245 ± 5 $\mu\text{m}$
Coating-Cladding Concentricity	<12 $\mu\text{m}$

## Mechanical Specifications

#### Proof Test

The entire fiber length is subjected to a tensile stress ±100 kpsi (0.7 GPa)\*.  
\*Higher proof test levels available.

#### Length

Fiber lengths available up to 50.4 km/spool.

\*Longer spliced lengths available.

## Performance Characterizations

Characterized parameters are typical values.

#### Core Diameter

8.2  $\mu\text{m}$

#### Numerical Aperture

0.14

*N.A. is measured at the one percent power level of a one-dimensional far-field scan at 1310 nm.*

#### Zero Dispersion Wavelength ( $\lambda_0$ )

1317 nm

#### Zero Dispersion Slope ( $S_d$ )

0.088 ps/(nm<sup>2</sup>·km)

#### Effective Group Index ( $n_{eff}$ )

1310 nm: 1.4670

1550 nm: 1.4677

#### Fatigue Resistance Parameter ( $N_f$ )

20

Dry: 0.6 lbs. (3N)  
Wet: 14-day room temperature:  
0.6 lbs. (3N)

#### Rayleigh Backscatter Coefficient (for 1 ns Pulse Width)

1310 nm: -77 dB

1550 nm: -82 dB

#### Stimulated Brillouin Scattering Threshold

20 dBm<sup>0</sup>

#### Note:

(1) When characterized with a transmitter consisting of 17 dB SBS threshold over standard single-mode fiber. While absolute SBS threshold is a function of distance and signal format, NexCor fiber offers a 3 dB improvement over standard single-mode fiber independent of these variables.

## Formulas

#### Dispersion

$$\text{Dispersion} = D(\lambda) = \frac{S_d}{4} \left[ (\lambda - \frac{\lambda_0}{k}) \right] \text{ps}/(\text{nm} \cdot \text{km})$$

for 1200 nm ≤  $\lambda$  ≤ 1625 nm

$\lambda$  = Operating Wavelength

#### Cladding Non-Circularity

$$\text{Cladding Non-Circularity} = \left[ 1 - \frac{\text{Min. Cladding Diameter}}{\text{Max. Cladding Diameter}} \right] \times 100$$

## How to Order

Contact your sales representative, or call the Optical Fiber Customer Service Department:  
Ph: 607-248-2000 (U.S. and Canada)  
44-1244-287-437 (Europe)  
Email: [opticalfibers@corning.com](mailto:opticalfibers@corning.com)  
Please specify the fiber type, attenuation and quantity when ordering.

#### Corning Incorporated

[www.corning.com/opticalfiber](http://www.corning.com/opticalfiber)

One Riverfront Plaza

Corning, NY 14831

U.S.A.

Ph: 800-525-2324 (U.S. and Canada)

607-786-8125 (International)

Fx: 800-519-3632 (U.S. and Canada)

607-786-8344 (International)

Email: [cocf@corning.com](mailto:cocf@corning.com)

Europe  
Ph: 00 800 662 6621 (U.K., Ireland, Italy, France, Germany, The Netherlands, Spain and Sweden)  
+44 167 786 8125 (All Other Countries)

Fx: +44 167 786 8344

Asia Pacific

Australia  
Ph: 1-800-148-690

Fx: 0800-48-568

Indonesia  
Ph: 061-803-015-721-1261

Fx: 061-803-015-721-1262

Malaysia  
Ph: 1-800-40-3156

Fx: 1-800-40-3155

Philippines  
Ph: 1-800-1-116-0338

Fx: 1-800-1-116-0339

Singapore  
Ph: 800-1-300-955

Fx: 800-1-300-956

Thailand  
Ph: 001-803-1-3-721-1263

Fx: 001-803-1-3-721-1264

Latin America

Brazil  
Ph: 00817-762-4732

Fx: 00817-762-4996

Mexico  
Ph: 001-800-213-1719

Fx: 001-800-319-1472

Venezuela  
Ph: 800-1-44148

Fx: 800-1-44149

Greater China

Email: [GCCInfo@corning.com](mailto:GCCInfo@corning.com)

Beijing  
Ph: (86) 10-6505-5066

Fx: (86) 10-6505-5077

Hong Kong  
Ph: (852) 2807-2723

Fx: (852) 2807-2152

Shanghai  
Ph: (86) 21-322-24668

Fx: (86) 21-6288-1575

Taiwan  
Ph: (886) 2-2716-0338

Fx: (886) 2-2716-0339

Note: Corning is a trademark, and Corning and SMC-2® are registered trademarks, of Corning Incorporated, Corning, N.Y.

Any warranty or any terms relating to any Corning optical fiber is only contained in the written agreement between Corning and its distributor or reseller.

©2007, Corning Incorporated

# Intrebari

- ▶ (1p) Ce lungime de undă veți alege pentru emițător? Justificați.
- ▶ (2p) Alegeti fibrele pe care le veți utiliza. Justificați. Realizați schița legăturii
- ▶ (1p) Puteți realiza o legătură funcțională? Justificați.

*Zero Dispersion*

*Wavelength ( $\lambda_0$ )*

1317 nm

*Zero Dispersion Slope ( $S_0$ )*

0.088 ps/(nm<sup>2</sup>•km)


# Legatura

## ► Bilantul puterilor

$$A_{tot} [\text{dB}] = \sum_i A_i [\text{dB}]$$

$$P_e [\text{dBm}] \pm A_{tot} [\text{dB}] \geq S_r [\text{dBm}] + M [\text{dB}]$$

Maximum Attenuation	
Wavelength (nm)	Maximum Value* (dB/km)
1310	0.33 – 0.35
1383**	0.31 – 0.35
1490	0.21 – 0.24
1550	0.19 – 0.20
1625	0.20 – 0.23

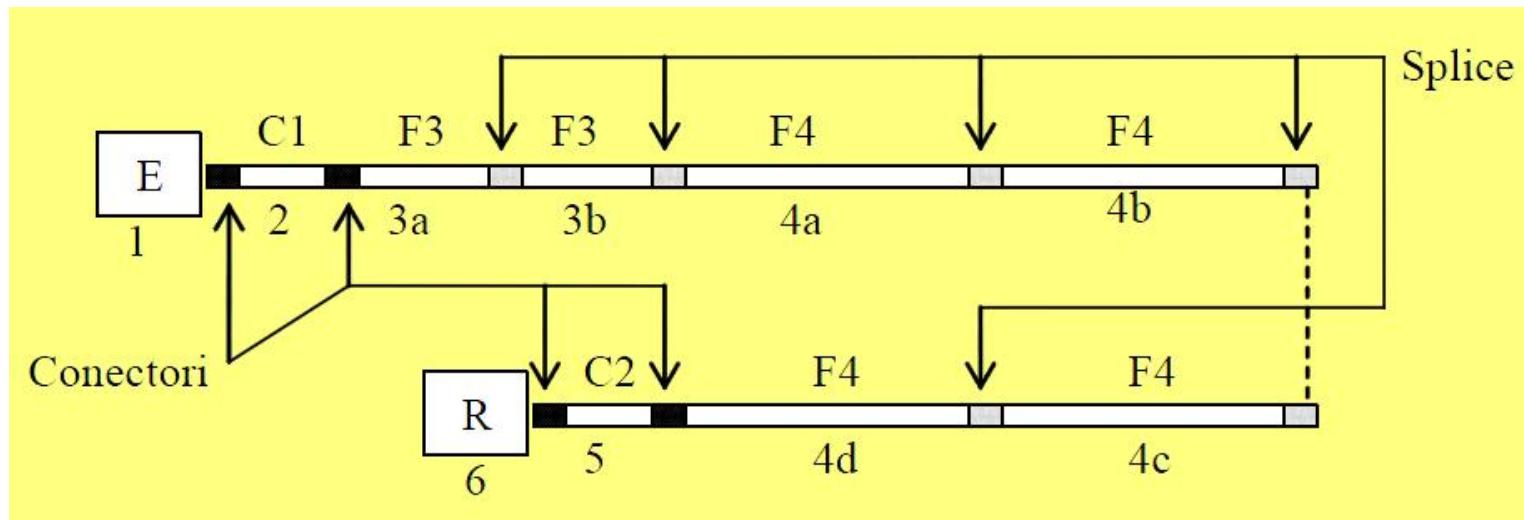

# Sistem

- ▶ 1. Emitter
- ▶ 2. Cablu 1 de conexiune
- ▶ 3. Fibra 3 (2 cabluri a 5 km fiecare: 3a,3b)
- ▶ 4. Fibra 4 (4 cabluri a 10 km fiecare:  
4a,4b,4c,4d)
- ▶ 5. Cablu 2 de conexiune
- ▶ 6. Receptor

# Atenuare

## ► Distribuita

- microcurburi
- imprastiere
- absorbtie

$$\text{Atenuare}_D[\text{dB/km}] = \frac{\text{Pierderi}[\text{dB}]}{\text{lungime}[\text{km}]}$$

## ► Localizata

- macrocurburi
- conectori
- splice
- tranzitii

$$\text{Atenuare}_L[\text{dB}] = \text{Pierderi}[\text{dB}]$$

$$A_{TOT}[\text{dB}] = A_L[\text{dB}] + A_D[\text{dB/km}] \cdot L[\text{km}]$$

# Pierderi

- ▶ Atenuare in fibra
- ▶ Atenuare datorata conectorilor
- ▶ Atenuare datorata splice-urilor
- ▶ Atenuare datorata diferentelor de apertura numerica
  - apare **numai** la trecerea de la un dispozitiv cu NA mai mare la un dispozitiv cu NA mai mic
  - **neglijabil** intre 2 fibre monomod sudate
- ▶ Atenuare datorata diferentelor de diametru
  - apare **numai** la trecerea de la un dispozitiv cu diametru mai mare la un dispozitiv cu diametru mai mic
  - **bidirectional** la fibre monomod sudate

# Dispersie

$$\Delta\tau_{\text{mod}} \cong \frac{L \cdot n_2 \cdot \Delta}{2\sqrt{3} \cdot c} \approx \frac{L \cdot NA^2}{4\sqrt{3} \cdot c \cdot n_2}$$

$$\Delta\tau_{cr} = D(\lambda) \cdot \Delta\lambda \cdot L$$

$$\Delta\tau_{tip} = \sum_i \Delta\tau_i$$

$$\Delta\tau_{tot} = \sqrt{\Delta\tau_{cr}^2 + \Delta\tau_{\text{mod}}^2}$$

$$V[\text{Gb / s}] \cong 2 \cdot B_{el}$$

$$\Delta\tau_{\text{mod}} \cong \frac{L \cdot n_2 \cdot \Delta^2}{4\sqrt{3} \cdot c} \cong \frac{L \cdot NA^4}{16\sqrt{3} \cdot c \cdot n_2^3}$$

$$D(\lambda) = \frac{S_0}{4} \cdot \left( \lambda - \frac{\lambda_0^4}{\lambda^3} \right)$$


$$B_{opt} = \frac{0.44}{\Delta\tau_{tot} [\text{ns}]} \quad [\text{GHz}] \quad B_{opt} = \sqrt{2} B_{el}$$

$$B_{3\text{dB, electric}}(\text{GHz}) = \frac{0.35}{T(\text{ns})}$$

$$\text{NRZ}_{\text{viteza date}}(\text{Gbit/s}) = \frac{1}{T_{\text{impuls}}(\text{ns})} \leq \frac{0.67}{T(\text{ns})}$$


# Sisteme cu mai multe tipuri de fibra

- ▶ Fibra tip 1 conectata/sudata cu fibra tip 2
- ▶ efecte **successive** se adună liniar
- ▶ la nivelul splice-ului apare o atenuare **localizata**:
  - atenuare pe splice/conector
  - atenuare datorita **NA** diferit (**daca** este cazul)
  - atenuare datorita **Φ** diferit (**daca** este cazul)

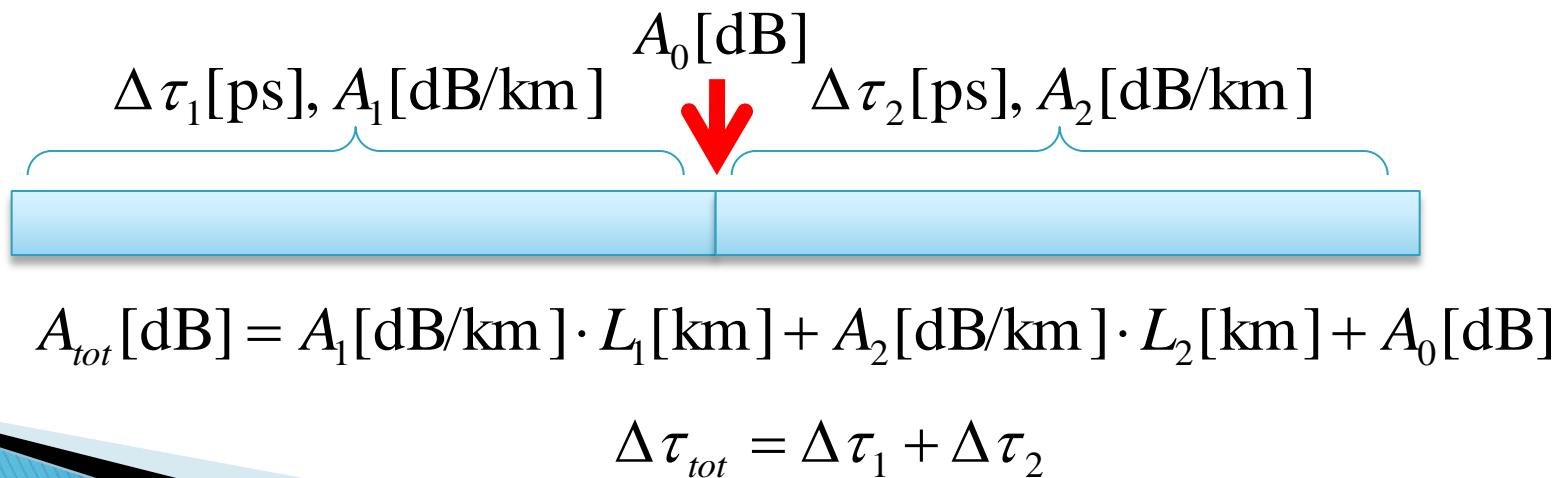


# Sisteme cu mai multe tipuri de fibra

- efecte **successive** se adună liniar

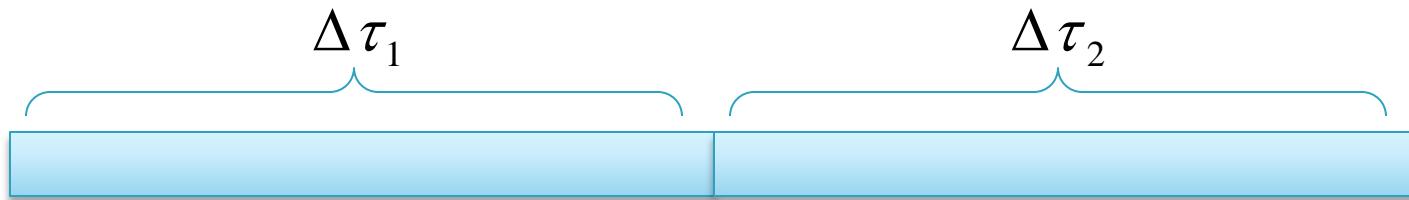

$$\Delta\tau_{tot} = \Delta\tau_1 + \Delta\tau_2$$

- dar pe fiecare fibra există efecte **simultane** (pentru dispersie) care se adună pătratic

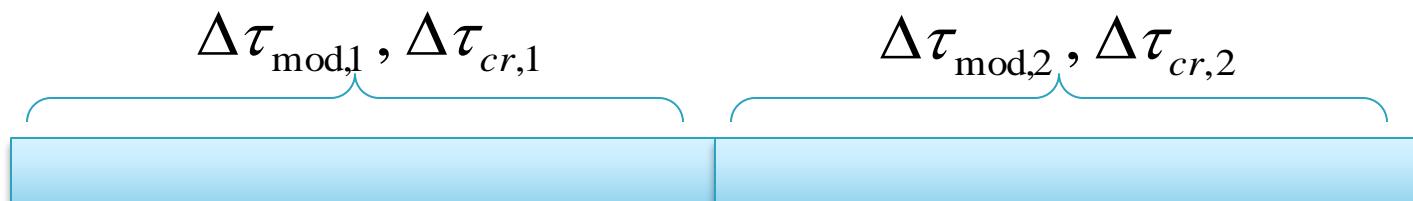


$$\Delta\tau_1 = \sqrt{\Delta\tau_{cr,1}^2 + \Delta\tau_{mod,1}^2}$$

$$\Delta\tau_2 = \sqrt{\Delta\tau_{cr,2}^2 + \Delta\tau_{mod,2}^2}$$

# Sisteme cu acelasi tip de fibra

- ▶ N tronsoane cu acelasi tip de fibra conectate/sudate
  - atenuare datorita NA **nula (acelasi tip)**
  - atenuare datorita  $\Phi$  **nula (acelasi tip)**
  - atenuare pe splice/conector: N-1 conectori
  - lungime totala:
- ▶ efecte **successive** se adună liniar
- ▶ efectele (dispersie si atenuare) proportionale cu distanta

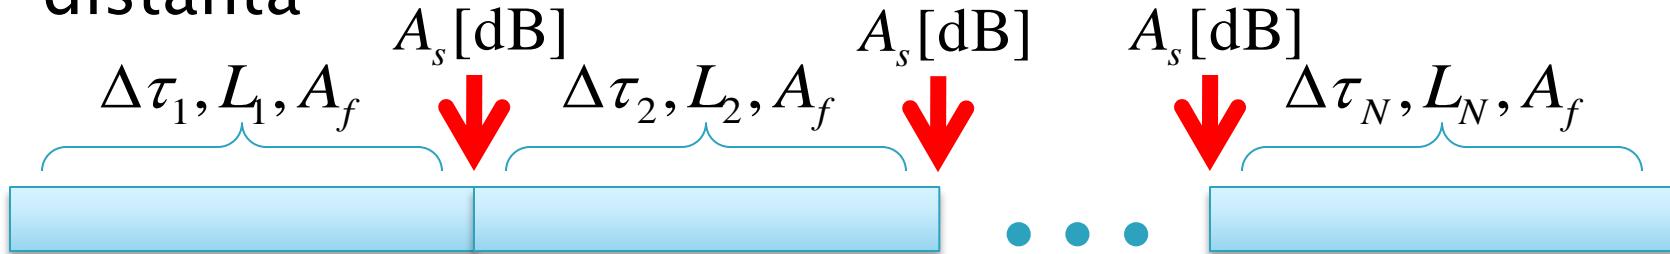

$$\Delta\tau_{tot} = \sum_{i=1}^N \Delta\tau(L_i) = \Delta\tau(L_{tot}) = \sqrt{\Delta\tau_{cr}(L_{tot})^2 + \Delta\tau_{mod}(L_{tot})^2}$$
$$A_{tot} [\text{dB}] = A_f [\text{dB/km}] \cdot L_{tot} [\text{km}] + (N-1) \cdot A_s [\text{dB}]$$

# Produs Banda · Distanță

$$\Delta\tau_{\text{mod}} \cong \frac{L \cdot n_2 \cdot \Delta}{2\sqrt{3} \cdot c} \approx \frac{L \cdot N A^2}{4\sqrt{3} \cdot c \cdot n_2}$$

$$\Delta\tau_{\text{tot}} = \sqrt{\Delta\tau_{\text{cr}}^2 + \Delta\tau_{\text{mod}}^2}$$

$$\Delta\tau_{\text{cr}} = D(\lambda) \cdot \Delta\lambda \cdot L$$

$$\Delta\tau_{\text{tot}} = \text{const} \cdot L$$

$$B_{\text{opt}} = \frac{0.44}{\Delta\tau_{\text{tot}} [\text{ns}]} \quad [\text{GHz}] \quad B_{\text{opt}} = \sqrt{2} B_{\text{el}} \quad V[\text{Gb/s}] \cong 2 \cdot B_{\text{el}}$$

$$V[\text{Gb/s}] \cong \frac{\text{const}}{L}$$

$$V[\text{Gb/s}] \cdot L[\text{km}] \cong \text{const}$$

# Lungime maxima

- ▶ **limitata de atenuare**
- ▶ lungimea cea mai mare la care pot face transmisia este obtinuta in cazul cel mai defavorabil
  - cele mai mici pierderi permise
  - atenuare distribuita maxima

$$A_{TOT}[\text{dB}] = A_L[\text{dB}] + A_D[\text{dB/km}] \cdot L[\text{km}]$$

$$\text{Atenuare}[\text{dB/km}] = \frac{\text{Pierderi}_D[\text{dB}]}{\text{lungime}[\text{km}]} \quad L_{\max} \Rightarrow \Delta P_{\min}, A_{D\max}$$

$$L_{\max} = \frac{\Delta P_{\min}[\text{dB}]}{A_{D\max}[\text{dB/km}]} = \frac{P_{e\min}[\text{dBm}] - S_{r\max}[\text{dBm}] - A_L[\text{dB}]}{A_{D\max}[\text{dB/km}]}$$

de obicei problema distantei maxime limitate de atenuare se pune pentru fibre **monomod**

# Lungime maxima

- ▶ **limitata de viteza**
- ▶ lungimea cea mai mare la care pot face transmisia este obtinuta in cazul cel mai defavorabil
  - dispersie maxima
- ▶ doua cazuri in functie de cum e specificata dispersia
  - $B \times L$  [MHz·km]
  - $S_0$ [ps/nm<sup>2</sup>/km],  $\lambda_0$ [nm]

$$B_{el\min} \approx \frac{V_{\min}[Gb/s]}{2}$$

$\Delta\tau_{tot\max}$ [ns]

$$B_{opt\min} = \sqrt{2}B_{el\min}$$

$$\Delta\tau_{tot\max}[\text{ns}] = \frac{0.44}{B_{opt\min}[\text{GHz}]}$$

$$L_{\max} = \frac{\Delta\tau_{tot\max}}{D(\lambda) \cdot \Delta\lambda}$$

$B \times L$  [MHz · km]

$$L_{\max}[\text{km}] = \frac{B \times L[\text{MHz} \cdot \text{km}]}{B_{el\min}[\text{MHz}]}$$

# Lungime maxima


- ▶ **limitata de atenuare**       $L_{\max}^a[\text{km}]$
- ▶ **limitata de viteza**       $L_{\max}^v[\text{km}]$
  
- ▶ lungimea cea mai mare la care pot face transmisia este obtinuta in cazul cel mai defavorabil (din cele doua limitari)  
$$L_{\max}[\text{km}] = \min(L_{\max}^a[\text{km}], L_{\max}^v[\text{km}])$$
- ▶ **de obicei**
  - monomod: limita impusa de atenuare
    - cu exceptia cazurilor in care nu se functioneaza la  $\lambda$  optim dpdv al dispersiei
  - multimod: limita impusa de viteza

# Calculul atenuării

$$\text{Pierderi} = \frac{P_{out}}{P_{in}}$$

$$\text{Pierderi [dB]} = [-] 10 \cdot \log_{10} \left( \frac{P_{out}}{P_{in}} \right)$$

$$\text{Pierderi [dB]} = [-] (P_{out} [\text{dBm}] - P_{in} [\text{dBm}])$$

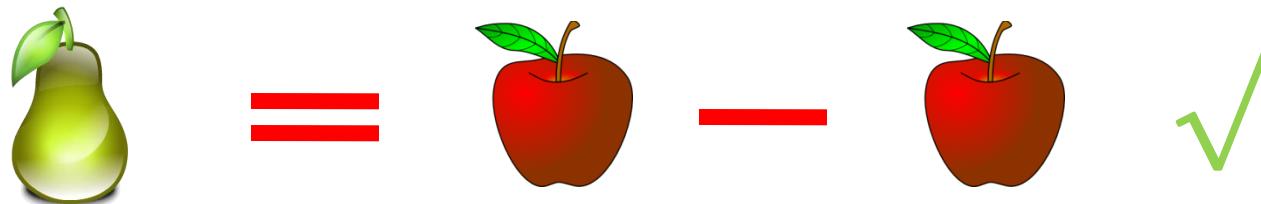

$$\text{Atenuare [dB/km]} = \frac{\text{Pierderi [dB]}}{\text{lungime [km]}}$$

# Problema simplă?

- ▶ Sursa luminoasa: 7.7 dBm
- ▶ Atenuarea fibrei: 1.16 dB/km
- ▶ Puterea la ieșire: 105 µW
- ▶ Lungimea fibrei: ?

# Problema simplă?

## ► Logaritmic

- $P_{\text{out}} = 10 \cdot \log (105 \mu\text{W} / 1 \text{ mW}) = -9.8 \text{ dBm}$  !
- Atenuarea :  $A_f = P_{\text{in}}[\text{dBm}] - P_{\text{out}}[\text{dBm}] = 17.5 \text{ dB}$  !
- $L = A_f / A_{\text{dB/km}} = 17.5 \text{ dB} / 1.16 \text{ dB/km} = 15.08 \text{ km}$

## ► Liniar

- $P_{\text{in}} = 1 \text{ mW} \cdot 10^{7.7/10} = 5.888 \text{ mW}$
- Atenuarea :  $A_f = P_{\text{in}} / P_{\text{out}} = 5.888 \text{ mW} / 0.105 \text{ mW} = 56.0762 [1]$  !
- Atenuarea pe unitatea de lungime  $A_{1/\text{km}} = 10^{1.16/10} = 1.3062 [1]$  !
- $A_f = (A_{1/\text{km}})^{L/1\text{km}} \rightarrow L = 1\text{km} \cdot \log(A_f) / \log(A_{1/\text{km}}) = 1.749 / 0.116 \text{ km} = 15.08 \text{ km}$

# Problema simpla? 2

- ▶ Sursa luminoasa: 4.9 dBm
- ▶ Atenuarea fibrei: 0.32 dB/km
- ▶ Lungimea fibrei: 17 km
  
- ▶ Puterea la iesire: ? [ $\mu$ W]

# Problema simplă? 2


## ► Logaritmic

- Atenuarea :  $A_f = A_{\text{dB/km}} \cdot L[\text{km}] = 5.44 \text{ dB}$
- $P_{\text{out}}[\text{dBm}] = P_{\text{in}}[\text{dBm}] - A_f [\text{dB}] = -0.54 \text{ dBm} !$
- $P_{\text{out}} = 1 \text{ mW} \cdot 10^{-0.54/10} = 0.883 \text{ mW} = 883 \mu\text{W}$

## ► Liniar

- Atenuarea :  $A_f [\text{dB}] = A_{\text{dB/km}} \cdot L[\text{km}] = 5.44 \text{ dB} !$
- Atenuarea :  $A_f [1] = 10^{A_f [\text{dB}] / 10} = 3.499 [1] !$
- $P_{\text{in}} = 1 \text{ mW} \cdot 10^{4.9/10} = 3.09 \text{ mW}$
- $P_{\text{out}} = P_{\text{in}} / A_f = 3.09 \text{ mW} / 3.499 = 0.883 \text{ mW} = 883 \mu\text{W}$

# Limite putere/bandă a dispozitivelor optoelectronice

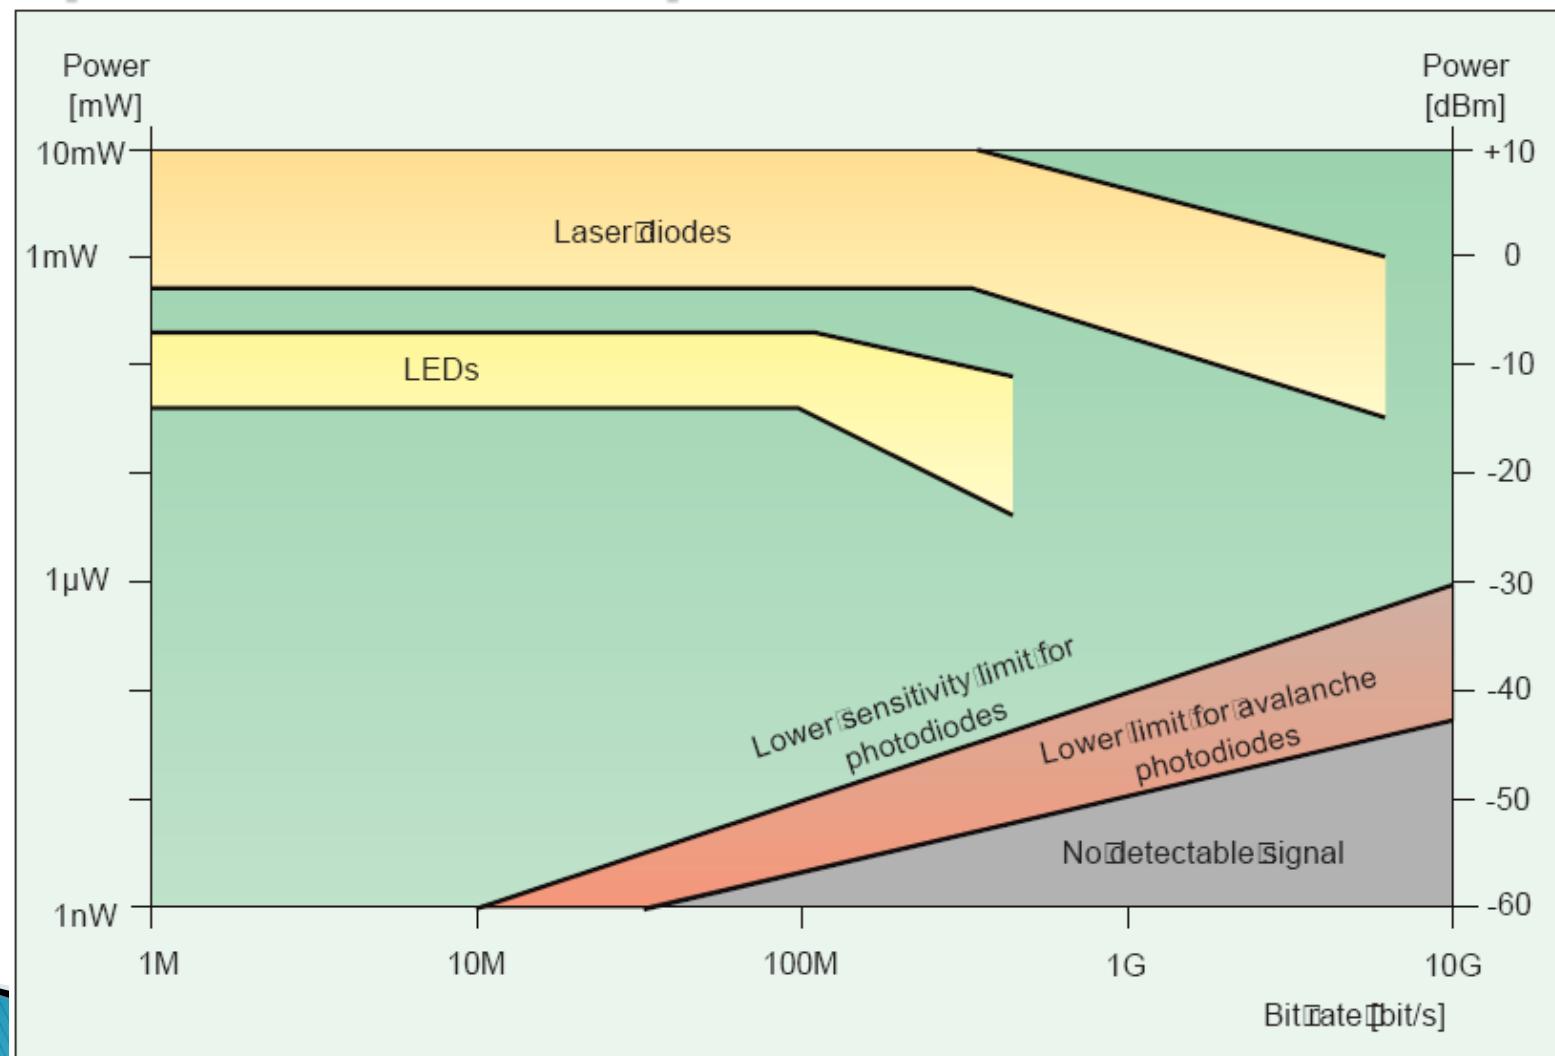

# Contact

- ▶ Laboratorul de microunde si optoelectronica
- ▶ <http://rf-opto.etti.tuiasi.ro>
- ▶ [rdamian@etti.tuiasi.ro](mailto:rdamian@etti.tuiasi.ro)